



## 1. External Parts

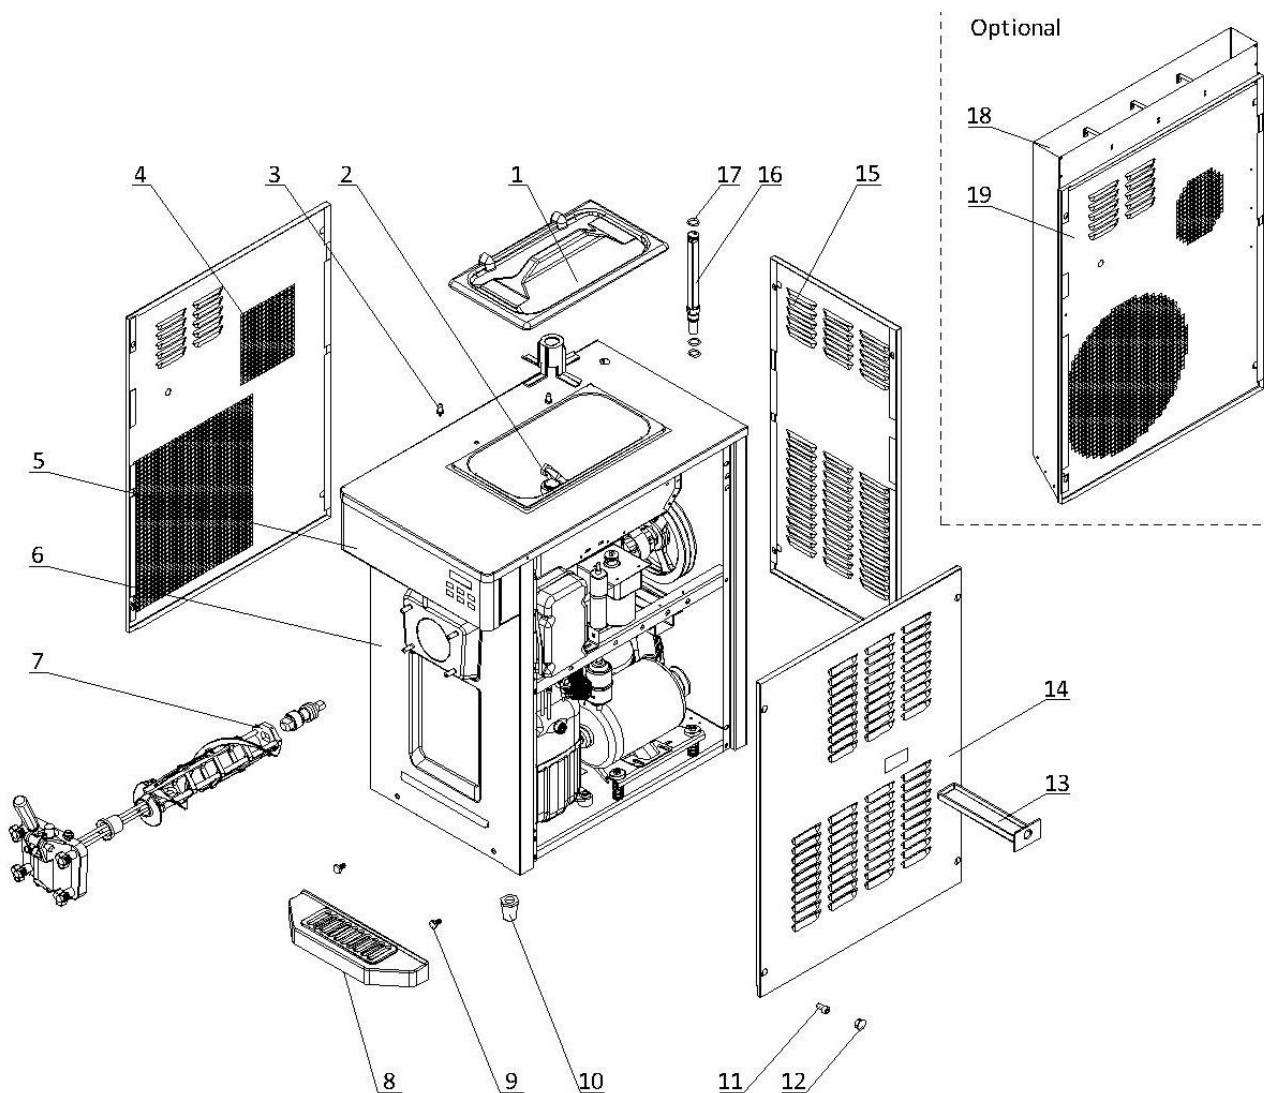

## 1. External Parts

| Item | Part Number                   | Description                                           | Qty. |
|------|-------------------------------|-------------------------------------------------------|------|
| 1    | <a href="#">3.4.03.01.004</a> | Hopper Lid - 12-15L                                   | 1    |
| 2    | Page 7                        | Hopper Agitator                                       | 1    |
| 3    | <a href="#">3.6.39.011</a>    | Hopper Lid Holder                                     | 2    |
| 4    | 2.3.4.18.027                  | Panel Left - 6236-C/6236-AC                           | 1    |
| 5    | Page 6                        | Draw Switch and Front Control Panel                   | 1    |
| 6    | 2.3.4.16.019                  | Panel Lower Front - 6236-C/6236-AC                    | 1    |
| 7    | Page 5                        | Dispensing Door and Beater                            | 1    |
| 8    | <a href="#">3.4.04.01.002</a> | Front Drip Tray - 37.2mm                              | 1    |
| 9    | 3.6.39.004                    | Drip Tray Mounting Bolt                               | 2    |
| 10   | 3.3.05.03.001                 | Leg - 45mm                                            | 4    |
| 11   | <a href="#">3.6.11.042</a>    | Panel Screw - M8x20                                   | 12   |
| 12   | 3.4.07.01.001                 | Bolt Hole Cover                                       | 12   |
| 13   | <a href="#">3.4.04.02.003</a> | Internal Drip Tray - 25mm                             | 1    |
| 14   | 2.3.4.20.027                  | Panel Right - 6236-C/6236-AC                          | 1    |
| 15   | <a href="#">2.3.4.13.004</a>  | Panel Rear - 6236-C/6236-AC                           | 1    |
| 16   | <a href="#">2.1.3.39.0011</a> | Air Tube - SS - Long - V3                             | 1    |
| 17   | 3.4.08.01.002                 | O-Ring - 18x2.2                                       | 3    |
| 18   | 2.3.4.34.042                  | Air Chute - 6236-C/6236-AC (Optional)                 | 1    |
| 19   | 2.3.4.18.032                  | Panel - Left - Air Chute - 6236-AC/6236-AC (Optional) | 1    |


## 2. Internal Parts

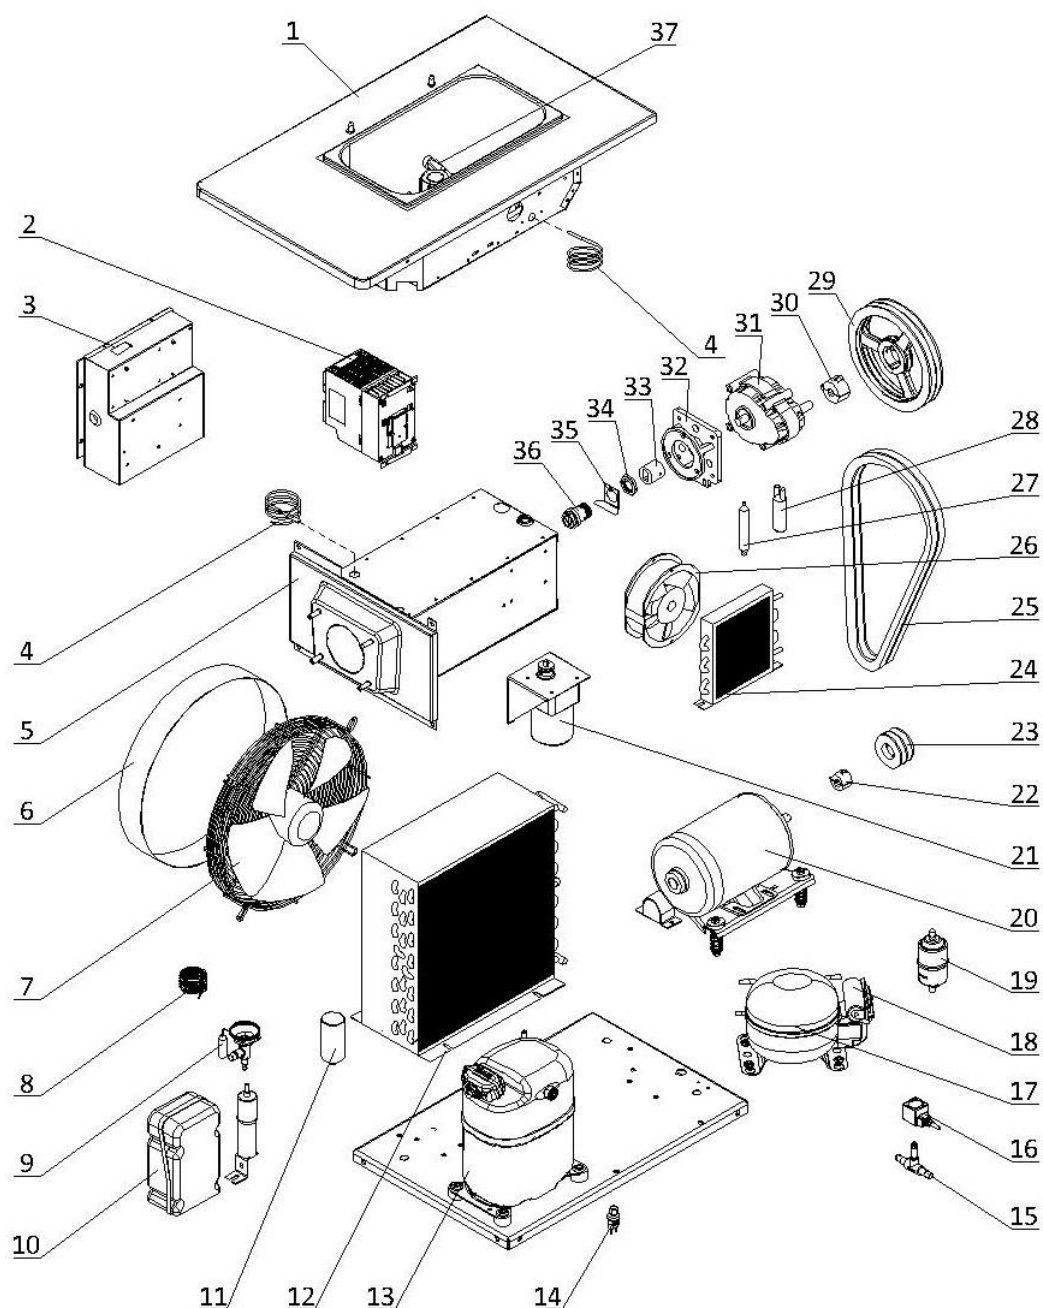

## 2. Internal Parts


| Item | Part Number     | Description                                             | Qty. |
|------|-----------------|---------------------------------------------------------|------|
| 1    | 2.1.1.03.0069   | Hopper Assembly - 6236-C                                | 1    |
| 2    | 3.1.01.08.006   | Inverter - 0.75kW - EFC3610-0K75-1P2-MDA                | 1    |
| 3    | Page 8          | Electrical Box                                          | 1    |
| 4    | 3.1.02.13.020   | Temperature Probe - PT100                               | 2    |
| 5    | 2.1.1.06.0038   | Cylinder Assembly - 6236-C/6236-AC                      | 1    |
| 6    | 2.1.3.50.0002   | Fan Shroud - 120mm                                      | 1    |
| 7    | 3.2.03.04.001   | Fan Motor - 220/60/1 - YWF4E-350S                       | 1    |
| 8    | 3.2.05.01.003   | Capillary Tube - 2.2×0.9                                | 1    |
| 9    | 3.2.04.01.012   | Thermal Expansion Valve - TUB2132                       | 1    |
| 10   | 3.2.01.04.004   | Start Component - Compressor - CAJ2464Z                 | 1    |
| 11   | 3.2.03.04.001-2 | Capacitor - Fan Motor - 450V - 5μF - CBB60              | 1    |
| 12   | 3.2.02.01.005   | Main Condenser - Single - 8m <sup>2</sup> - 410x410x150 | 1    |
| 13   | 3.2.01.02.005.A | Primary Compressor - CAJ2464Z                           | 1    |
| 14   | 3.2.04.06.004   | High Pressure Switch - 350~500psi                       | 1    |
| 15   | 3.2.04.04.004   | Solenoid Valve Body - EVU6 - 6W                         | 1    |
| 16   | 3.2.04.04.020   | Solenoid Coil - 230V - 6W                               | 1    |
| 17   | 3.2.01.01.002.A | Auxiliary Compressor - EM30HHR                          | 1    |
| 18   | 3.2.01.01.002-1 | Start Component - Compressor - EM30HHR                  | 1    |
| 19   | 3.2.04.05.002   | Filter Drier - Cylinder - DML083S                       | 1    |
| 20   | 3.3.01.04.005   | Motor - 220/60/3 - 750W - P56AH60F41                    | 1    |
| 21   | Page 7          | Agitator Motor Assembly                                 | 1    |
| 22   | 3.3.04.01.005   | Bushing - 1008-16                                       | 1    |
| 23   | 3.3.04.02.001   | Pulley - Beater Motor - SPA63-2-1008                    | 1    |
| 24   | 3.2.02.01.001   | Auxiliary Condenser - Single - 0.7m <sup>2</sup>        | 1    |
| 25   | 3.3.03.01.016   | Belt - Motor to Beater - V-XPA1180                      | 2    |
| 26   | 3.2.03.01.001   | Fan Motor - BT220-15050S2HL                             | 1    |
|      | 3.2.03.01.005   | Fan Motor - UF-1751B22H (Alternative)                   | 1    |
| 27   | 3.2.04.05.001   | Filter Drier - Hopper - 16×2.2×120                      | 1    |
| 28   | 3.2.04.07.001   | Suction Accumulator - 25×100×0.6                        | 1    |
| 29   | 3.3.04.02.008   | Pulley - Gear Box - SPA212-2-1210                       | 1    |
| 30   | 3.3.04.01.007   | Bushing - 1210-16                                       | 1    |
| 31   | 3.3.02.01.023   | Gear Box - SS - 45*20 Shaft - 89mm                      | 1    |
| 32   | 2.1.3.15.0004   | Bracket - Gear Box - 3.4-7.3qt - 89mm                   | 1    |
| 33   | 3.3.02.04.006   | Coupling Drive - 3.4qt-4.0qt-7.3qt - 20mm               | 1    |
| 34   | 3.3.02.02.010   | Nut - Rear Shell Bearing                                | 1    |
| 35   | 2.3.6.04.004    | Lock Plate - Rear Shell Bearing - 42mm                  | 1    |
| 36   | 3.3.02.02.002   | Rear Shell Bearing - SS (3.4qt) + FB                    | 1    |
| 37   | 920.1.04.0002   | Mix Low Sensor Assembly                                 | 1    |

## 3. Dispensing Door and Beater

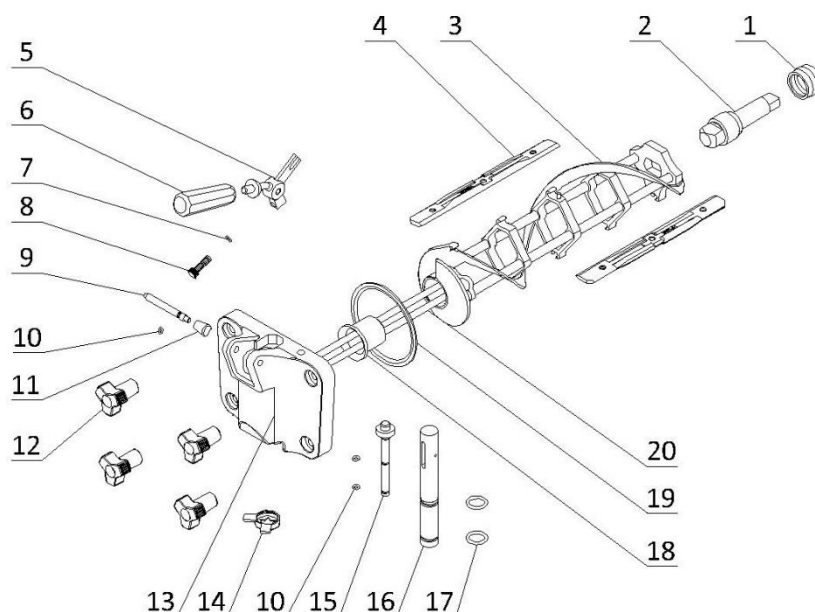


| Item | Part Number                   | Description                         | Qty. |
|------|-------------------------------|-------------------------------------|------|
| 1    | <a href="#">3.4.07.05.002</a> | Gasket - Drive Shaft                | 1    |
| 2    | <a href="#">2.1.3.25.0002</a> | Drive Shaft - SS - 3.4qt            | 1    |
| 3    | <a href="#">2.1.1.10.0018</a> | Beater - SS - Large - 3.4qt - V2    | 1    |
| 4    | 3.4.02.01.007                 | Scraper Blade - Medium - V2         | 2    |
| 5    | <a href="#">2.1.3.26.0005</a> | Seat - Handle - 1F - 3.4qt          | 1    |
| 6    | <a href="#">3.4.05.01.001</a> | Handle - Dispensing - SS            | 1    |
| 7    | 3.4.08.01.012                 | O-Ring - 3x1.5                      | 1    |
| 8    | 3.6.39.008                    | Adjustment Screw - Handle - 34mm    | 1    |
| 9    | <a href="#">2.1.3.27.0004</a> | Retention Pin - Handle - 1F - 3.4qt | 1    |
| 10   | 3.4.08.01.013                 | O-Ring - 5.2x1.9                    | 3    |
| 11   | 2.1.3.27.0025                 | Nut - Retention Pin - Handle        | 1    |
| 12   | 3.4.05.02.007                 | Hand Screw - Medium - Dispensing    | 4    |
| 13   | <a href="#">2.1.3.14.0004</a> | Dispensing Door - SS - 1F - 3.4qt   | 1    |
| 14   | 3.4.05.03.004                 | Design Cap - Double Triangle - 31mm | 1    |
| 15   | 2.1.3.02.0015                 | Prime Plug - SS - Standard          | 1    |
| 16   | <a href="#">2.1.3.01.0012</a> | Draw Valve - SS - 1F - 6236/6236A   | 1    |
| 17   | 3.4.08.01.006                 | O-Ring - 16.8x2.4                   | 2    |
| 18   | 3.4.01.03.008                 | Beater Guide - SS - 3.4qt - V2      | 1    |
| 19   | 3.4.08.02.008                 | Door Gasket - SS - 3.4qt            | 1    |
| 20   | <a href="#">2.1.1.11.0002</a> | Beater Rod - SS - Large - 3.4qt     | 1    |

## 4. Draw Switch and Front Control Panel

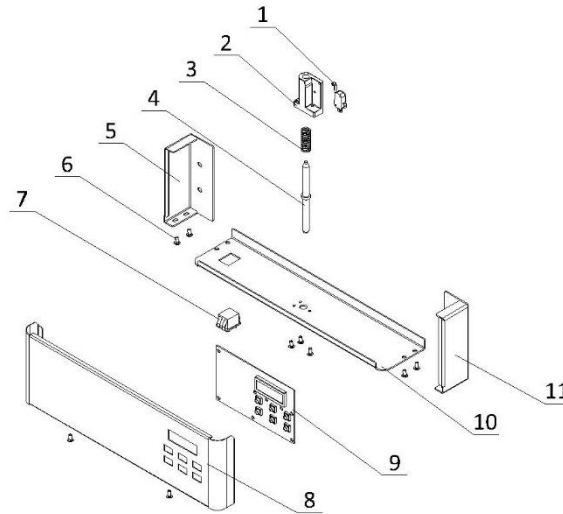


| Item | Part Number                   | Description                                            | Qty. |
|------|-------------------------------|--------------------------------------------------------|------|
| 1    | <a href="#">3.1.03.01.002</a> | Micro Switch - KW-7-2                                  | 1    |
| 2    | <a href="#">3.4.07.06.008</a> | Bracket - Micro Switch & Shaft & Spring                | 1    |
| 3    | <a href="#">3.6.03.012</a>    | Spring - Shaft - Draw Switch                           | 1    |
| 4    | <a href="#">2.1.3.50.0080</a> | Shaft - Draw Switch - 6236-C/6236-AC                   | 1    |
| 5    | 2.3.4.37.003                  | Panel - Overhead Left - 6228-C/6228-AC/6236-C/6236-AC  | 1    |
| 6    | 3.6.22.010                    | Screw - M5x10                                          | 9    |
| 7    | <a href="#">3.1.03.03.003</a> | Power Switch - KCD2-2                                  | 1    |
| 8    | 2.3.4.33.010                  | Panel - Overhead Front - 6236-C/6236-AC                | 1    |
| 9    | <a href="#">920.1.01.0006</a> | Control Board - SS - V2.152 - Horizontal - V2          | 1    |
| 10   | 2.3.4.39.059                  | Panel - Overhead Bottom - 6236-C/6236-AC               | 1    |
| 11   | 2.3.4.38.003                  | Panel - Overhead Right - 6228-C/6228-AC/6236-C/6236-AC | 1    |

## 5. Hopper Agitator

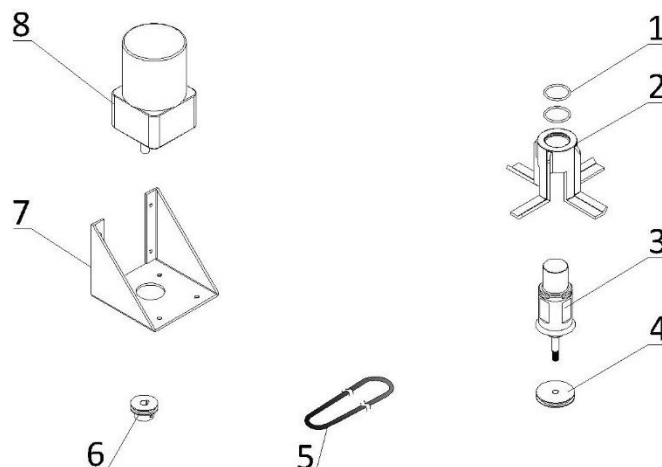

| Item | Part Number                   | Description                                | Qty. |
|------|-------------------------------|--------------------------------------------|------|
| 1    | <a href="#">3.4.08.01.034</a> | O-Ring - 31×2                              | 2    |
| 2    | <a href="#">2.1.1.23.0002</a> | Blade - Hopper Agitator - Standard - V2    | 1    |
| 3    | <a href="#">2.1.1.12.0001</a> | Agitator Assembly - 129mm                  | 1    |
| 4    | <a href="#">2.1.4.02.017</a>  | Pulley - Hopper Agitator - Single - 47.6mm | 1    |
| 5    | <a href="#">2.1.4.08.041</a>  | Belt - Hopper Agitator - 400mm             | 1    |
| 6    | <a href="#">3.3.04.04.006</a> | Pulley - Hopper Agitator - Drive - 30mm    | 1    |
| 7    | <a href="#">2.3.4.45.007</a>  | Bracket - Agitator Motor - 110mm           | 1    |
| 8    | <a href="#">3.3.01.01.006</a> | Motor - Agitator - 220V - YN80-25-6G       | 1    |

## 6. Electrical Box

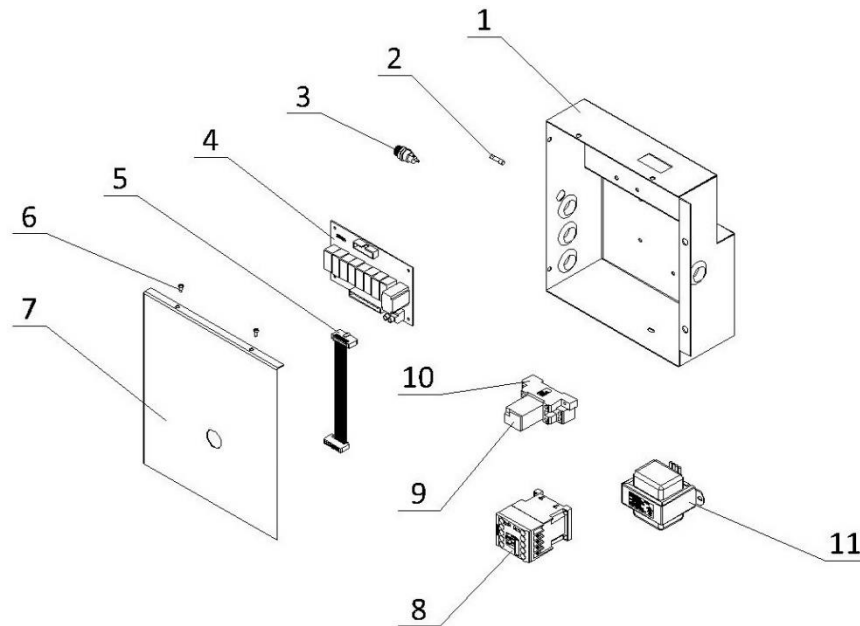

| Ite | Part Number                   | Description                           | Qty. |
|-----|-------------------------------|---------------------------------------|------|
| 1   | 2.3.1.15.004                  | Electrical Box - 6236                 | 1    |
| 2   | <a href="#">3.1.02.08.002</a> | Fuse - 0.5A                           | 1    |
| 3   | <a href="#">3.1.02.08.012</a> | Seat - Fuse - 250V                    | 1    |
| 4   | <a href="#">2.2.1.01.0007</a> | Power Board - SS - V2.152             | 1    |
| 5   | <a href="#">3.1.04.01.003</a> | Ribbon Cable - 20 Pin                 | 1    |
| 6   | 3.6.06.072                    | Screw - M4x10                         | 2    |
| 7   | 2.3.1.18.006                  | Cover - Electrical Box - 6236         | 1    |
| 8   | <a href="#">3.1.01.01.010</a> | Contactor - 220V - 3RT6017-1AN21      | 1    |
| 9   | <a href="#">3.1.01.03.029</a> | Intermediate Relay - AC220V - HH54P-L | 1    |
| 10  | <a href="#">3.1.01.03.031</a> | Base - Relay - TP514X1-E              | 1    |
| 11  | <a href="#">3.1.01.04.007</a> | Transformer - 50W - 50313MW-32        | 1    |