

KIT INCLUDES:

- 1 - High Limit Switch w/ Wires
- 1 – Instruction Sheet
- 1 – Mounting Washer
- 2 – Self Drilling/Self Tapping Stainless Screws

TOOLS REQUIRED:

- Slotted Screwdriver/Phillips Screwdriver or bit in drill – *Depending on age of oven (Fasteners vary) for removing Top Air Duct fasteners.
- 5/16" Socket and Wrench or Nut Runner – For removing Rear Panel fasteners.

 **WARNING – DISCONNECT UNIT FROM POWER BEFORE CONTINUING, POTENTIAL ELECTRICAL SHOCK RISK!** 


STEP 1. Remove Center Rear Panel from Oven Cavity and disconnect Hi-Limit power leads. (Pic 1)

STEP 2. From inside the oven cavity, remove the Top Air Duct Panel.

STEP 3. Remove the two mounting screws for the thermostat and remove it from the oven. (Pic 2)



STEP 4. Install Replacement High Limit per diagram below.

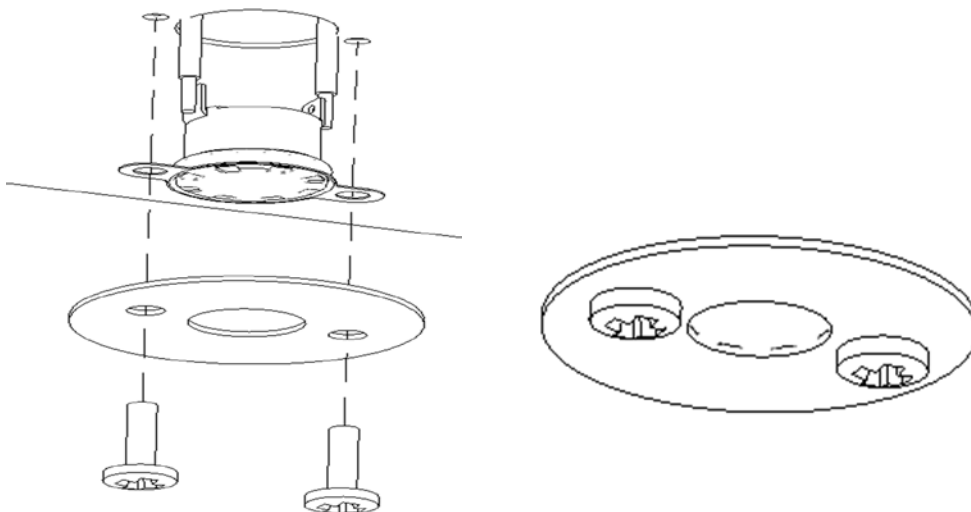

STEP 5. Reconnect Hi-Limit power leads at rear of oven cavity.

STEP 6. From inside the oven cavity, replace the Top Air Duct Panel.

STEP 7. Replace the Rear Panel on the rear of the oven.

STEP 8. Reconnect power supply and test oven.