


## INSTRUCTIONS TO INSTALL NEW COLD CONTROL ON THE RUF 48


Step 1: Unplug power to the unit.

Step 2: Remove shelves from the unit.

Step 3: Remove the control knob and evaporator cover.

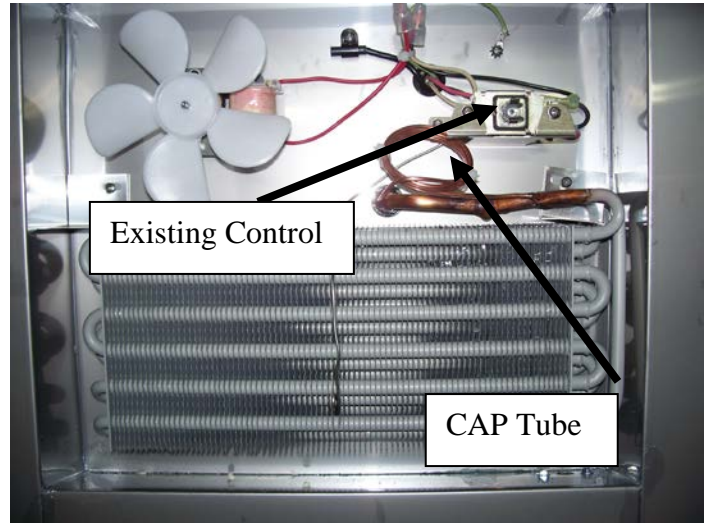


Step 4: Unwire and remove existing control.

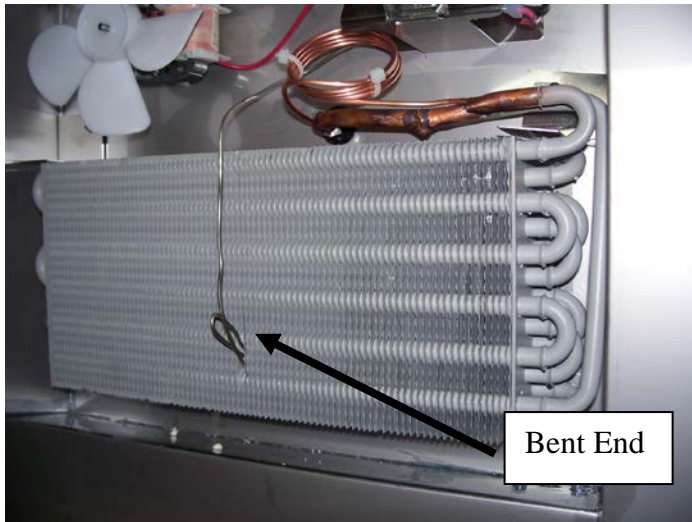

Step 5: Insert the bent end of the new control bulb into the bottom of the evaporator coil (end should be bent 2 inch x 2 turns with radius).

Step 7: Replace evaporator cover and control knob.

Note: New control should be set at the # 3.5 setting.

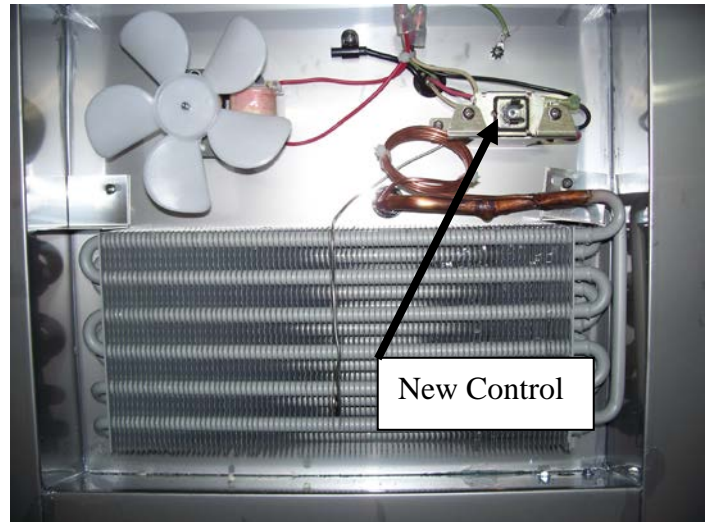

Step 6: Mount the new control and re-connect wires.