



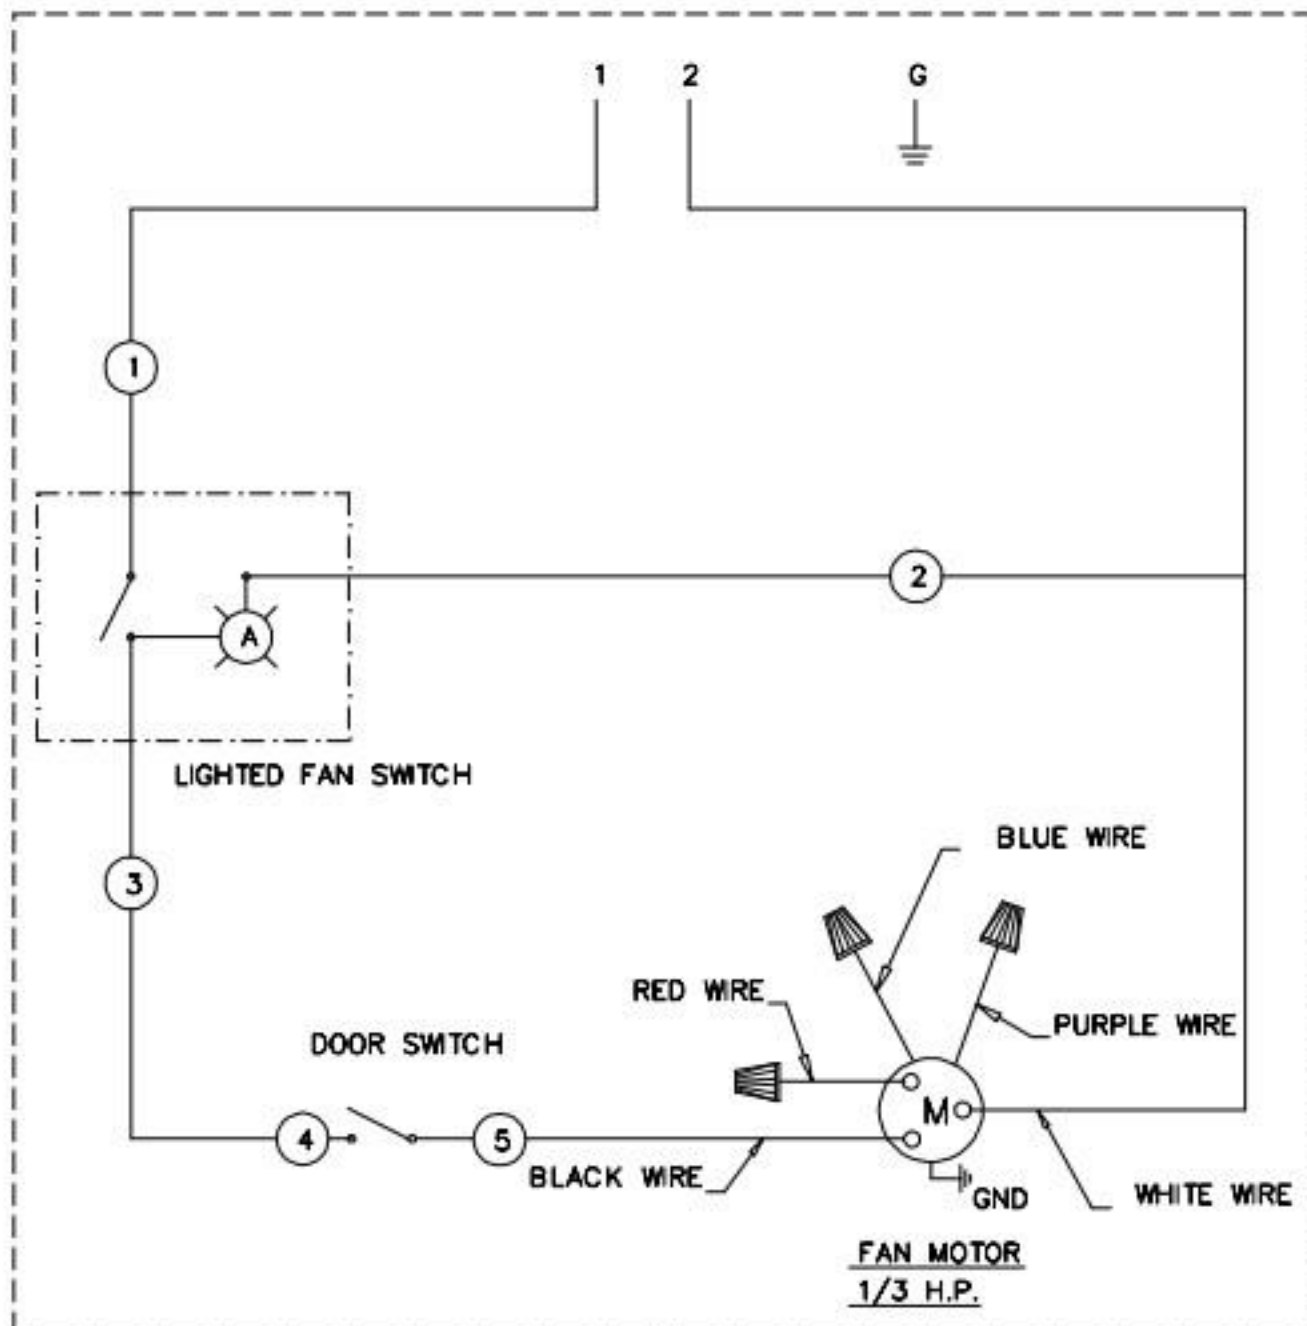

NOT REQUIRED
FOR STANDARD
OVEN OPERATIONS

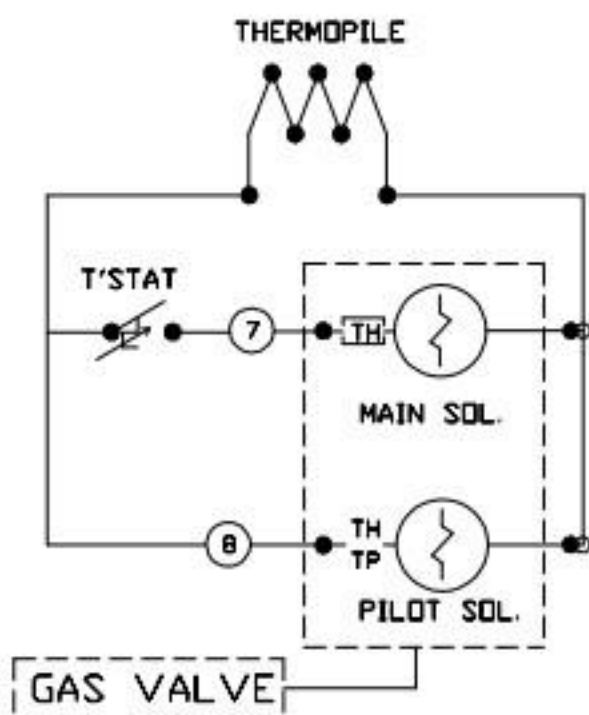


VOLTAGE	120	220	240
PHASE	SINGLE	SINGLE	SINGLE
AMPERAGE	8	5	5

WIRING DIAGRAM
110/120 V & 220/240 V


P/N

1101546

TERMINAL	PIN LOCATION	DESCRIPTION	WIRE COLOR
S1	1	REMOTE SENSE	ORANGE
HS1	2	IGNITOR POWER	GRAY
L1	3	120VAC INPUT (HOT)	RED
TH	4	THERMOSTAT	BLACK
L2	5	NEUTRAL	WHITE
V1	6	VALVE POWER	BROWN
V2	7	VALVE NEUTRAL	YELLOW
HS2	8	IGNITOR RETURN (or NC CONTACT)	BLUE
B.GND	9	BURNER GROUND	GREEN

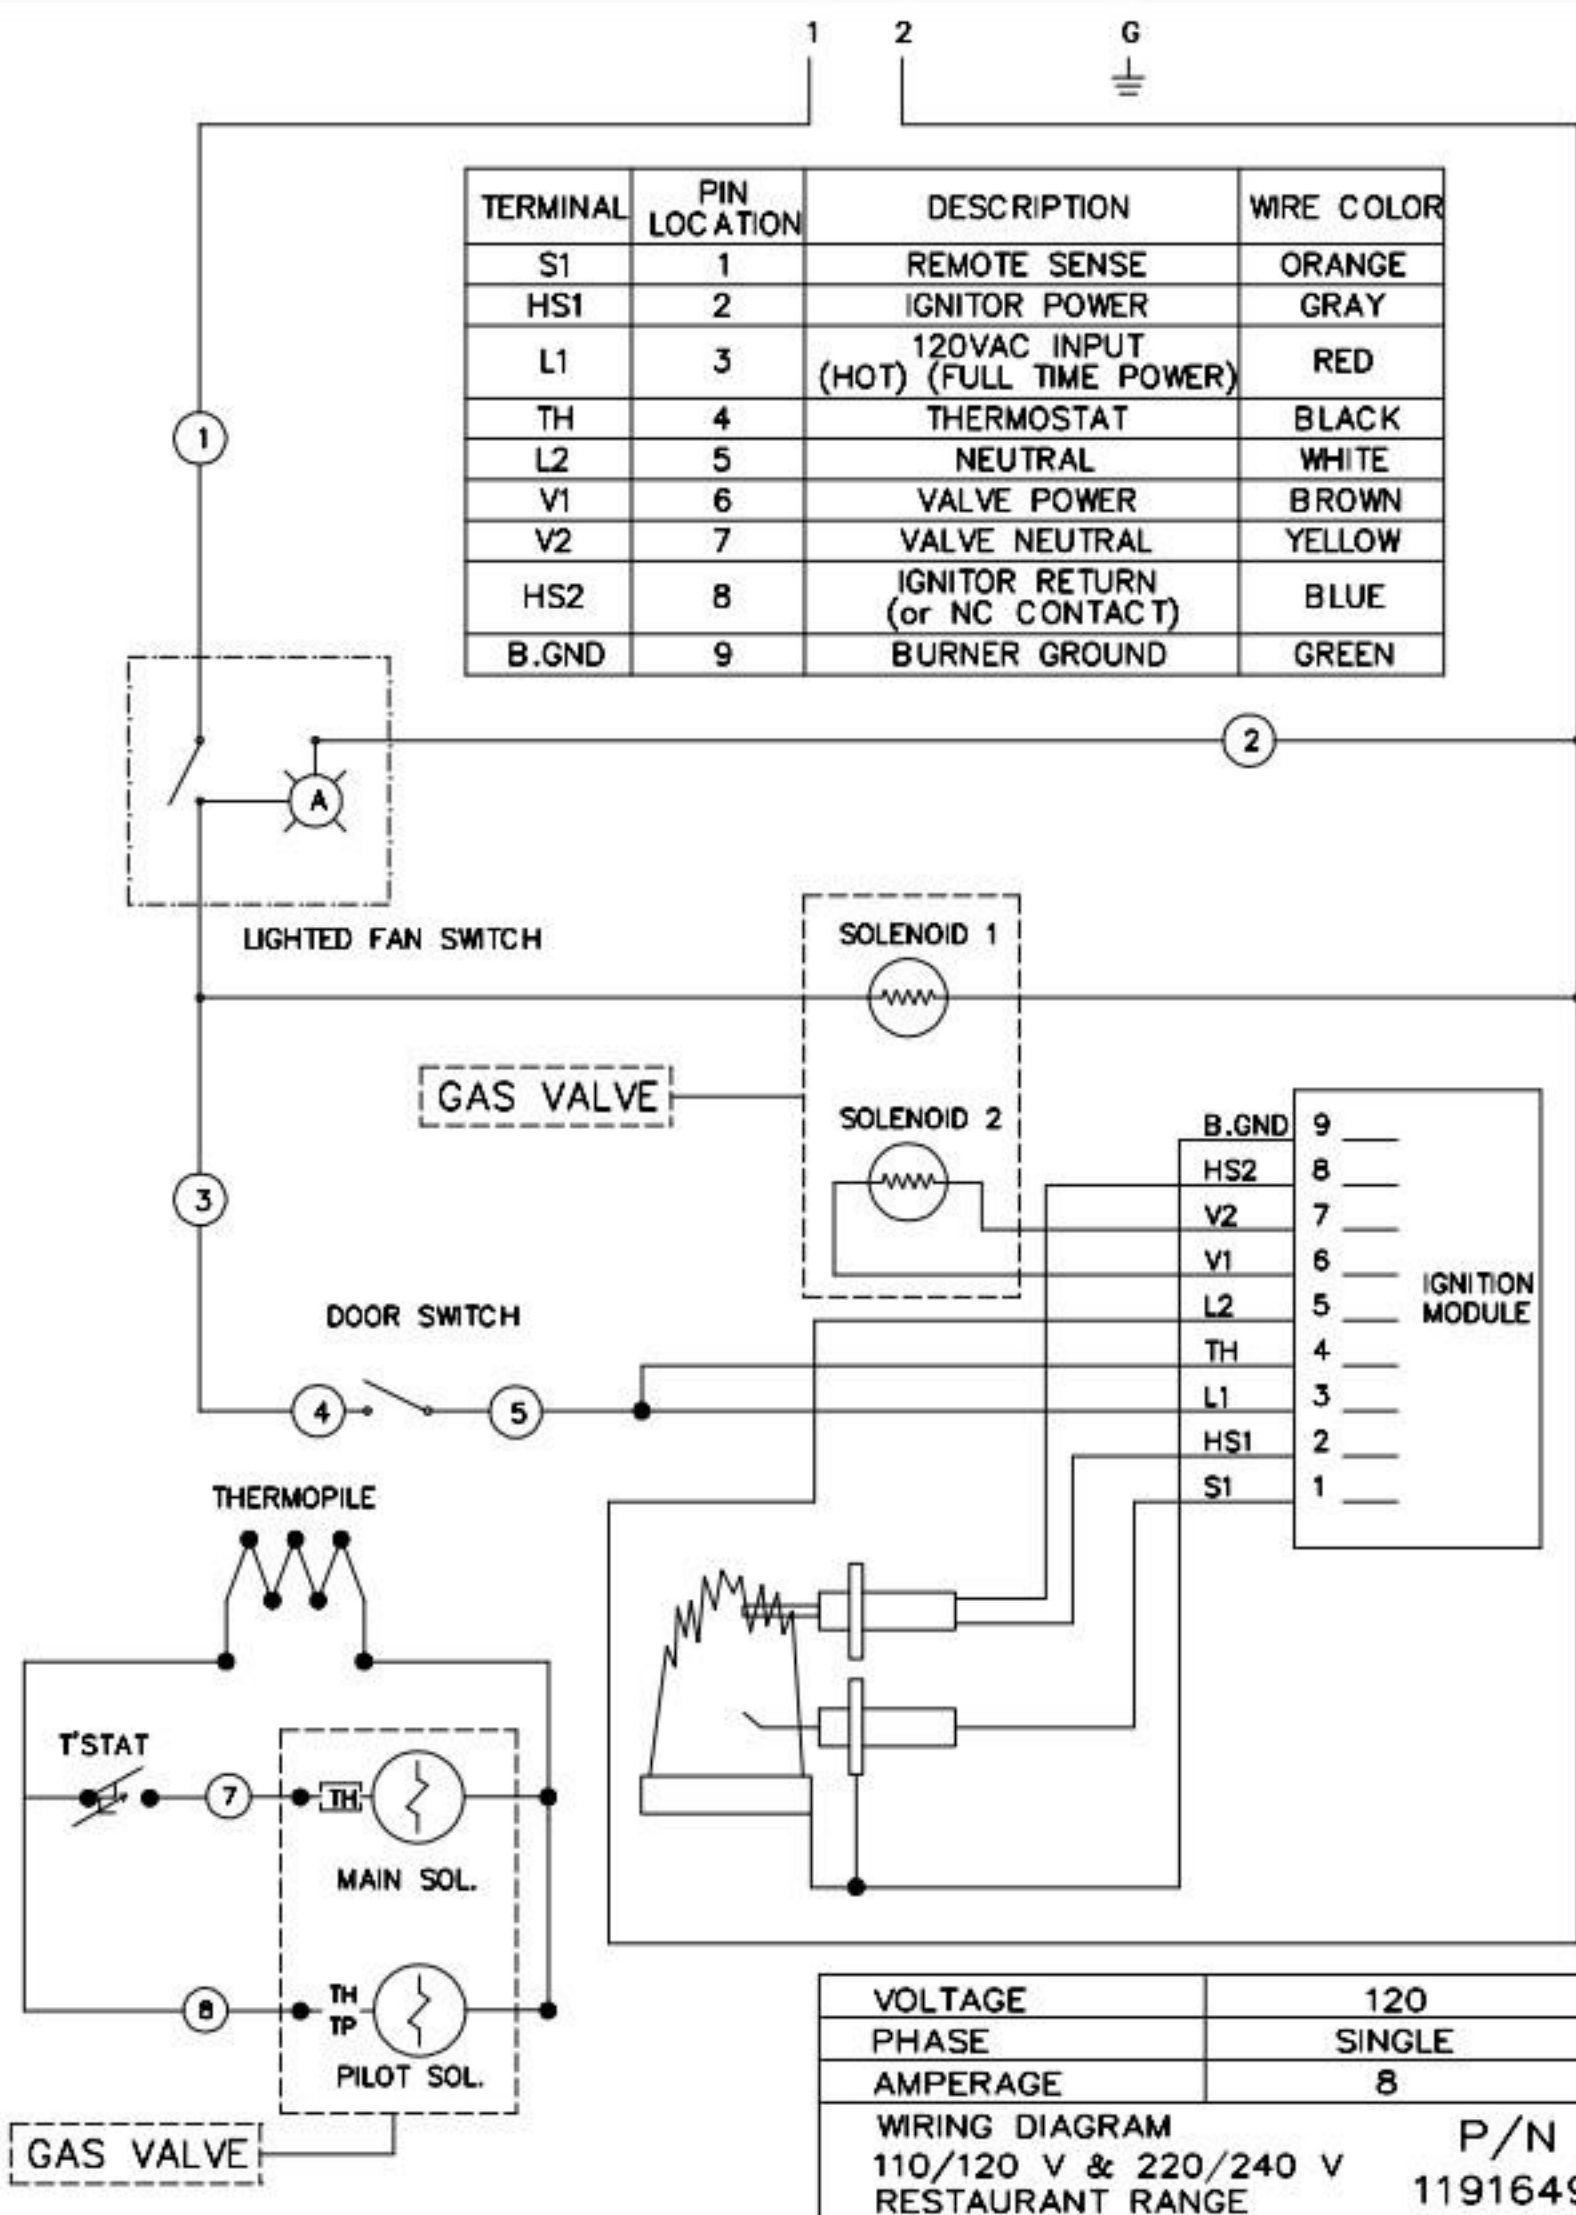


REQUIRED FOR
480V ONLY

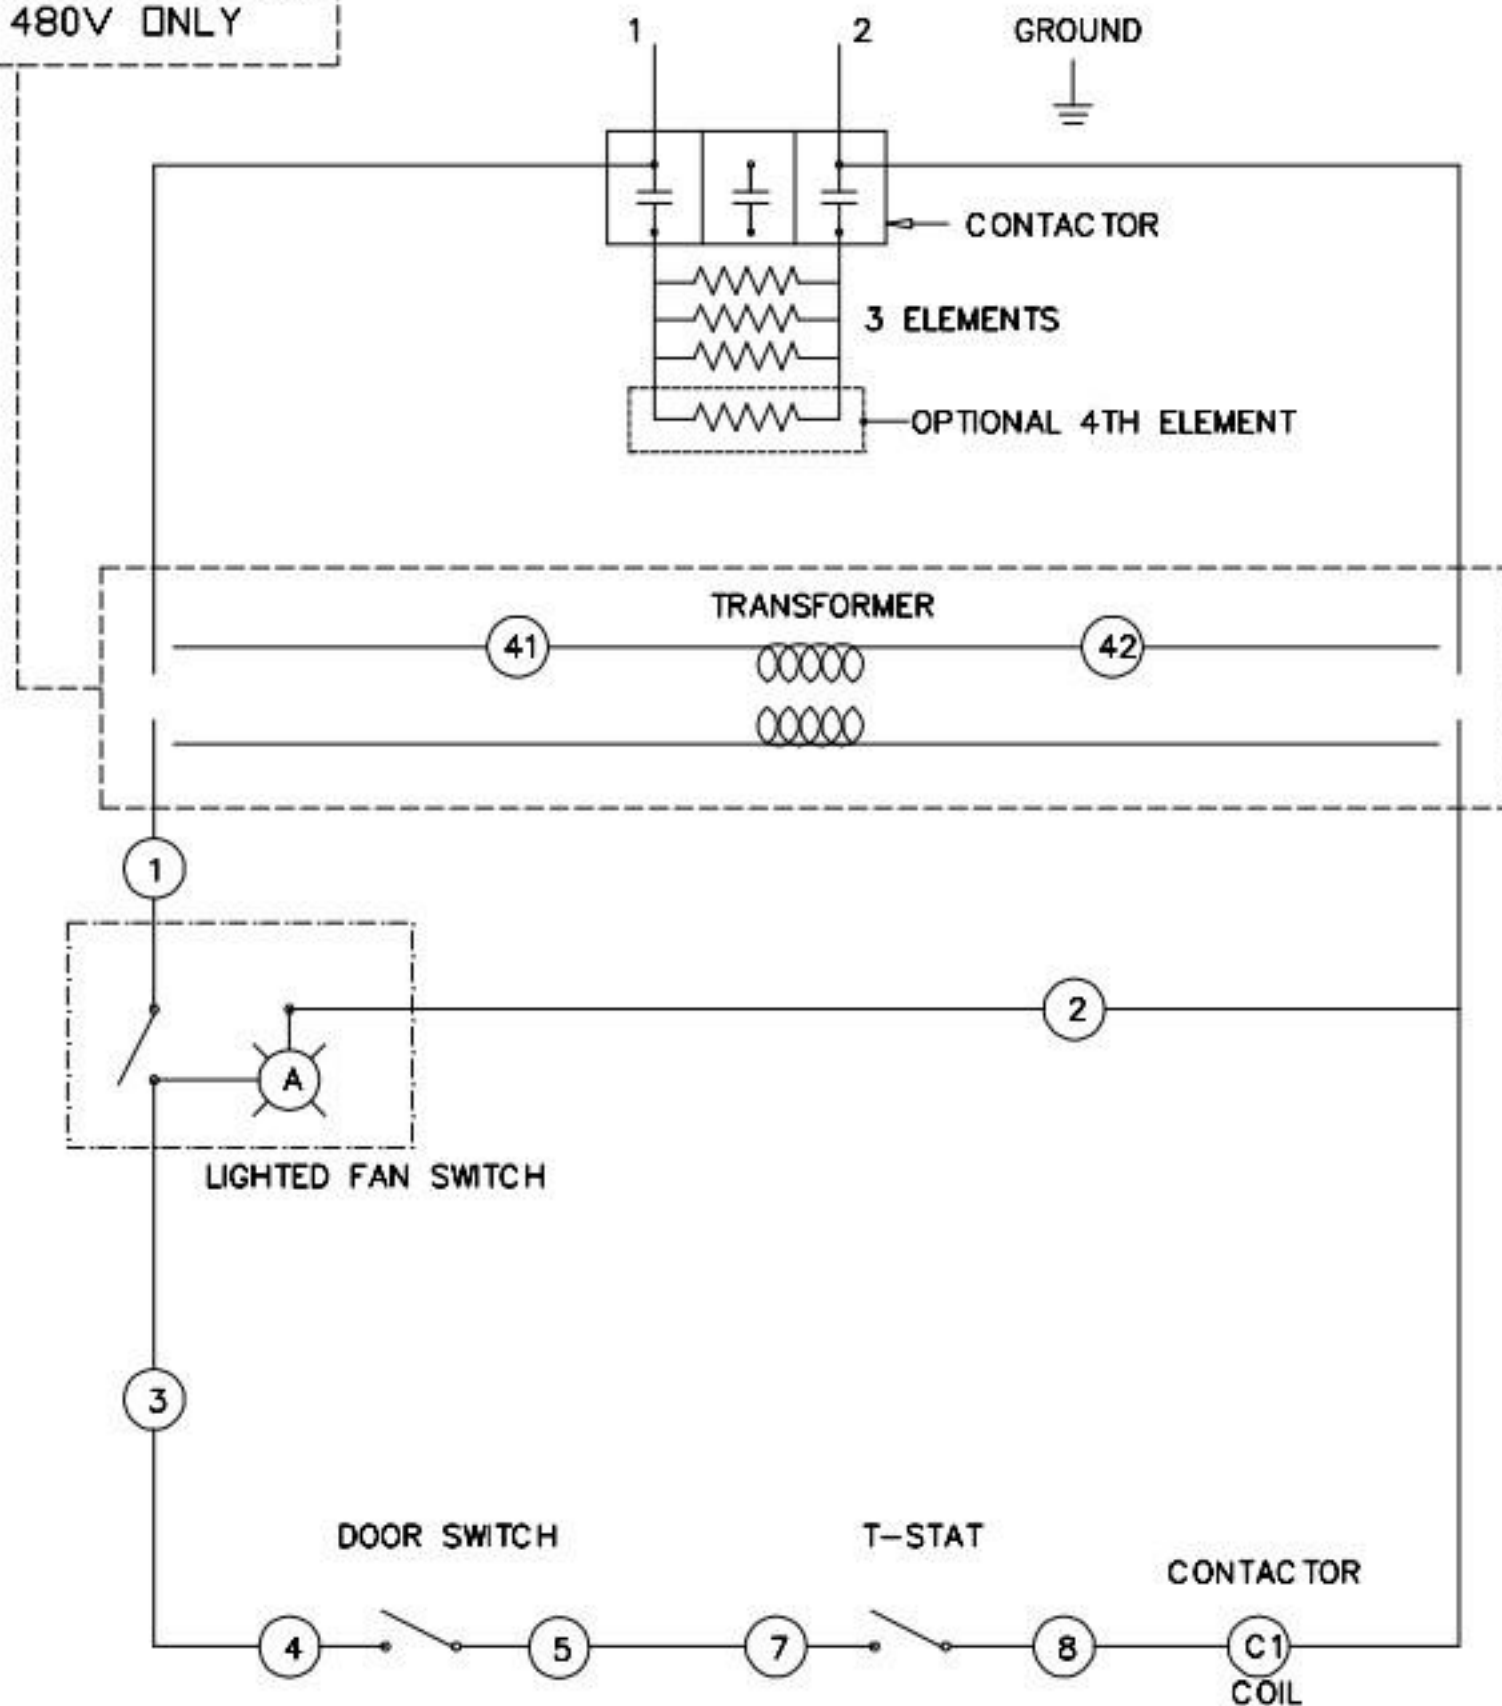

VOLTAGE	208	220	240	480
PHASE	SINGLE	SINGLE	SINGLE	SINGLE
AMPERAGE (W/ 4TH ELEMENT)	32	31	27	17
WIRING DIAGRAM 110/120 V & 220/240 V RESTAURANT RANGE				P/N 1191647

REQUIRED FOR
480V ONLY

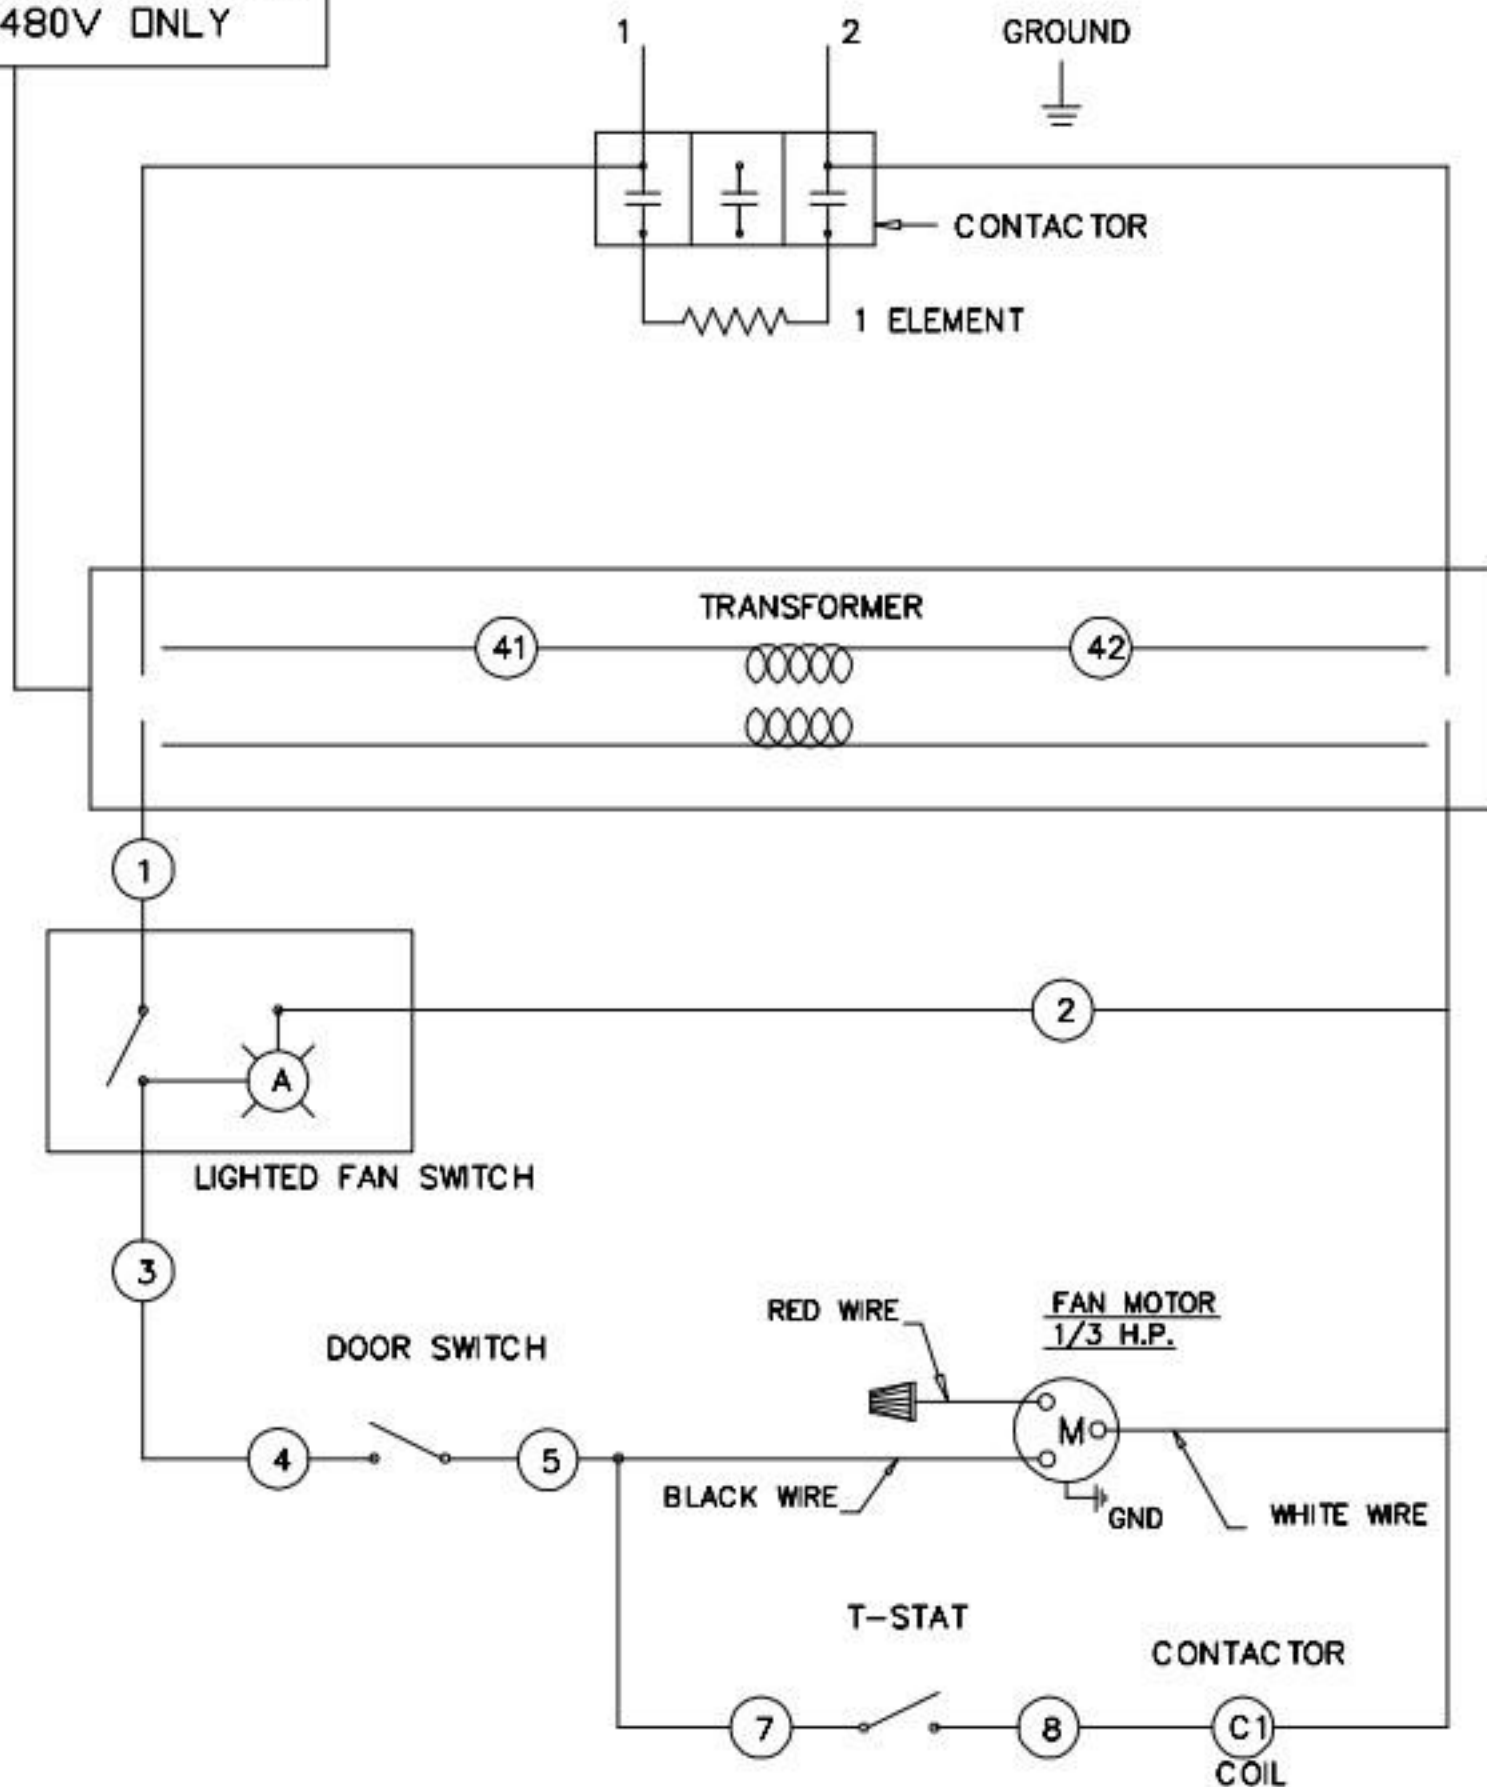

VOLTAGE	208	220	240	480
PHASE	SINGLE	SINGLE	SINGLE	SINGLE
AMPERAGE	39	37	34	22

WIRING DIAGRAM
110/120 V & 220/240 V
RESTAURANT RANGE

P/N
1191648