

CF101X SINGLE BARREL CONTINUOUS FLOW COUNTERTOP CUSTARD FREEZER MACHINE

DESCRIPTION

Countertop continuous flow freezer produces gourmet old-fashioned frozen custard, sorbet, Italian ices and other frozen desserts. The patented freezing chamber minimizes the size of ice crystals for a smoother, creamier product. Match production to demand with the “hold product” mode refrigeration setting.



Every machine includes Stoelting’s White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

ITEMS

- ☐ **CF101X-302B** Air-cooled, single-phase

ACCESSORIES & OPTIONS

- ☐ **4177350** FS2 Floor Stand 22” x 24” x 31”
- ☐ **4183513** FSS2 Floor Stand 22 x 24” x 26”
- ☐ **2202408** FS4 Floor Stand 24-1/4” x 22-1/4” x 18-3/4”

FEATURES

- Quick-Freeze Technology™ minimizes size of ice crystals to ensure smoother, creamier product.
- Hold cycle keeps barrels at a safe temperature during off-cycle.
- Compact, counter-top model saves space.
- Easy to clean design ensures sanitary operation and ensures product is always fresh.
- Refrigerated hopper with independent temperature control maintains safe storage temperatures in any environment.
- IntelliTec™ control with lighted display provides simple two-button operation.
- Super-sized condensing system provides high output even in high temperature conditions.
- Optional floor stand to create a “floor model” package, freeing up counter space and providing additional storage.
- NSF approved food-grade plastic blades provide quiet operation and superior durability.


Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Approvals
Date

--	--

CF101X SINGLE BARREL CONTINUOUS FLOW COUNTERTOP CUSTARD FREEZER MACHINE

DIMENSIONS

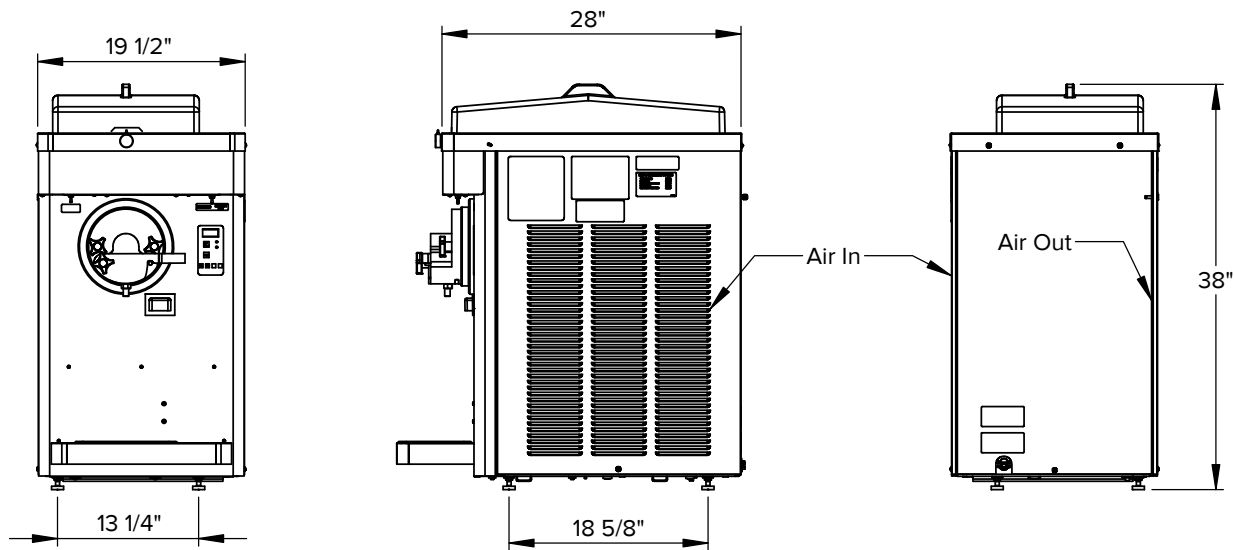

Height dimensions may vary ±1/2" due to adjustable legs

GENERAL SPECIFICATIONS

Freezing Cylinder				Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)
Capacity gallon (L)	Compressor						
	Btu/hr	Refrigerant	Charge (oz)				
0.8 (3.03)	6,000	R-448A	72	5.4 (20.4)	1 1/2	310 (140.6)	410 (186.0)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.
- Power cord provided (no plug).
- Air cooled units require: 6" (15.2 cm) air space on both sides and 10" (25.4) air space above the machine.
- Details on CAD Revit Symbols Libraries are available on www.stoelting.kclcad.com website.

ITEM NUMBER SPECIFICATIONS

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)
CF101X-302B	Air	1	220-240	50	15	NA



Service Information
 800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
www.stoeltingfoodservice.com
www.vollrath.com