

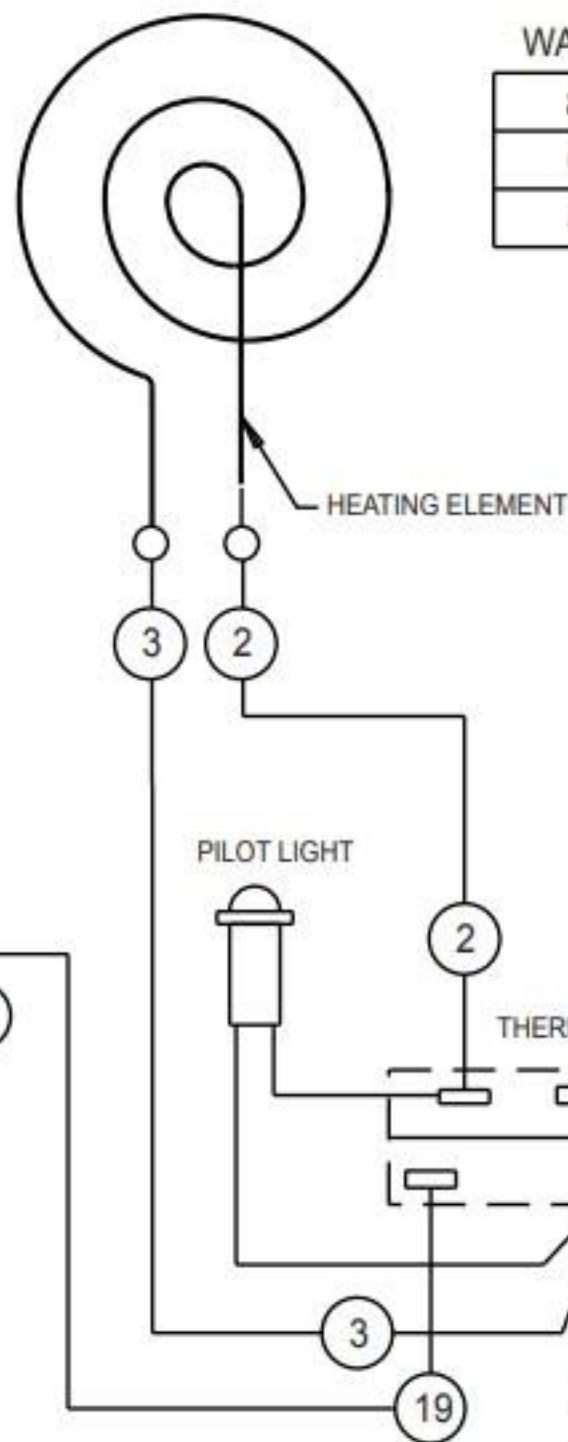
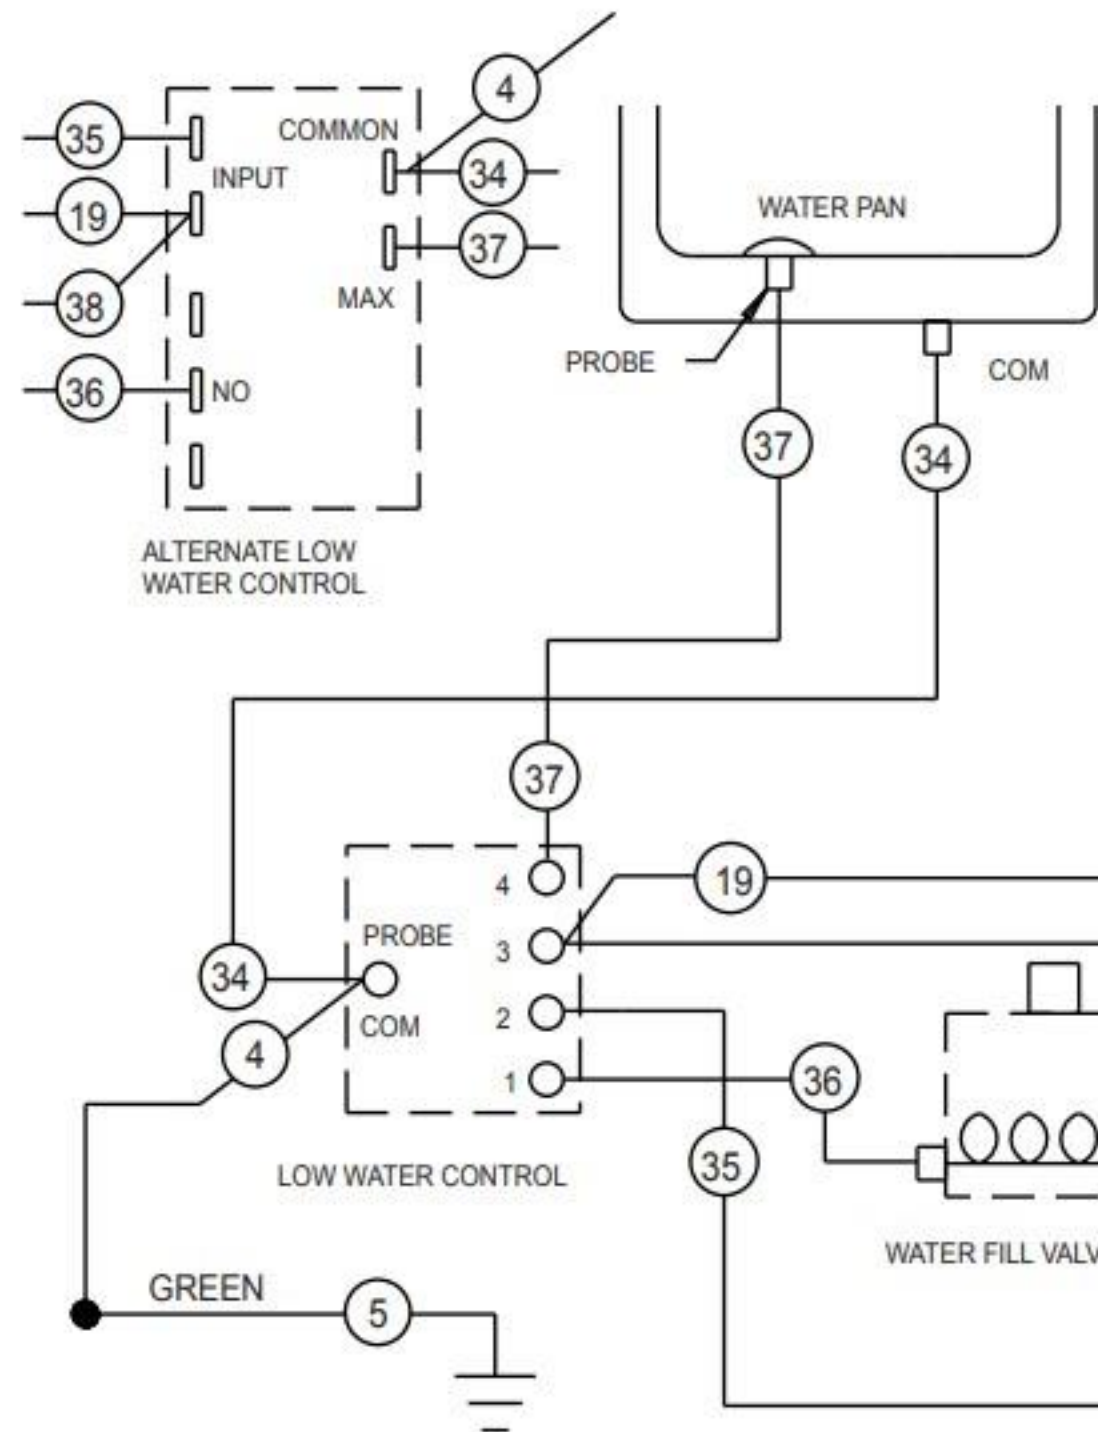


120 AND 208/240V, SINGLE PHASE

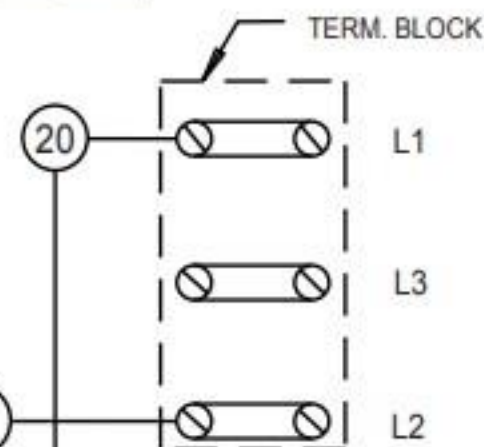


| WATTS | VOLTS | PER LINE |
|-------|-------|----------|
| 825   | 120   | 6.9      |
| 620   | 208   | 3.0      |
| 825   | 240   | 3.4      |


50 / 60 HZ

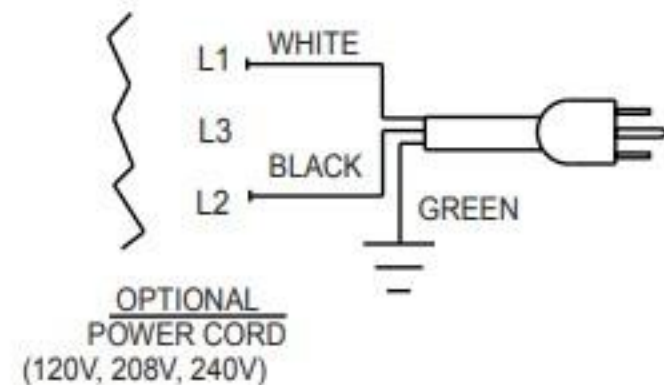



120 OR 208/240V, SINGLE PHASE

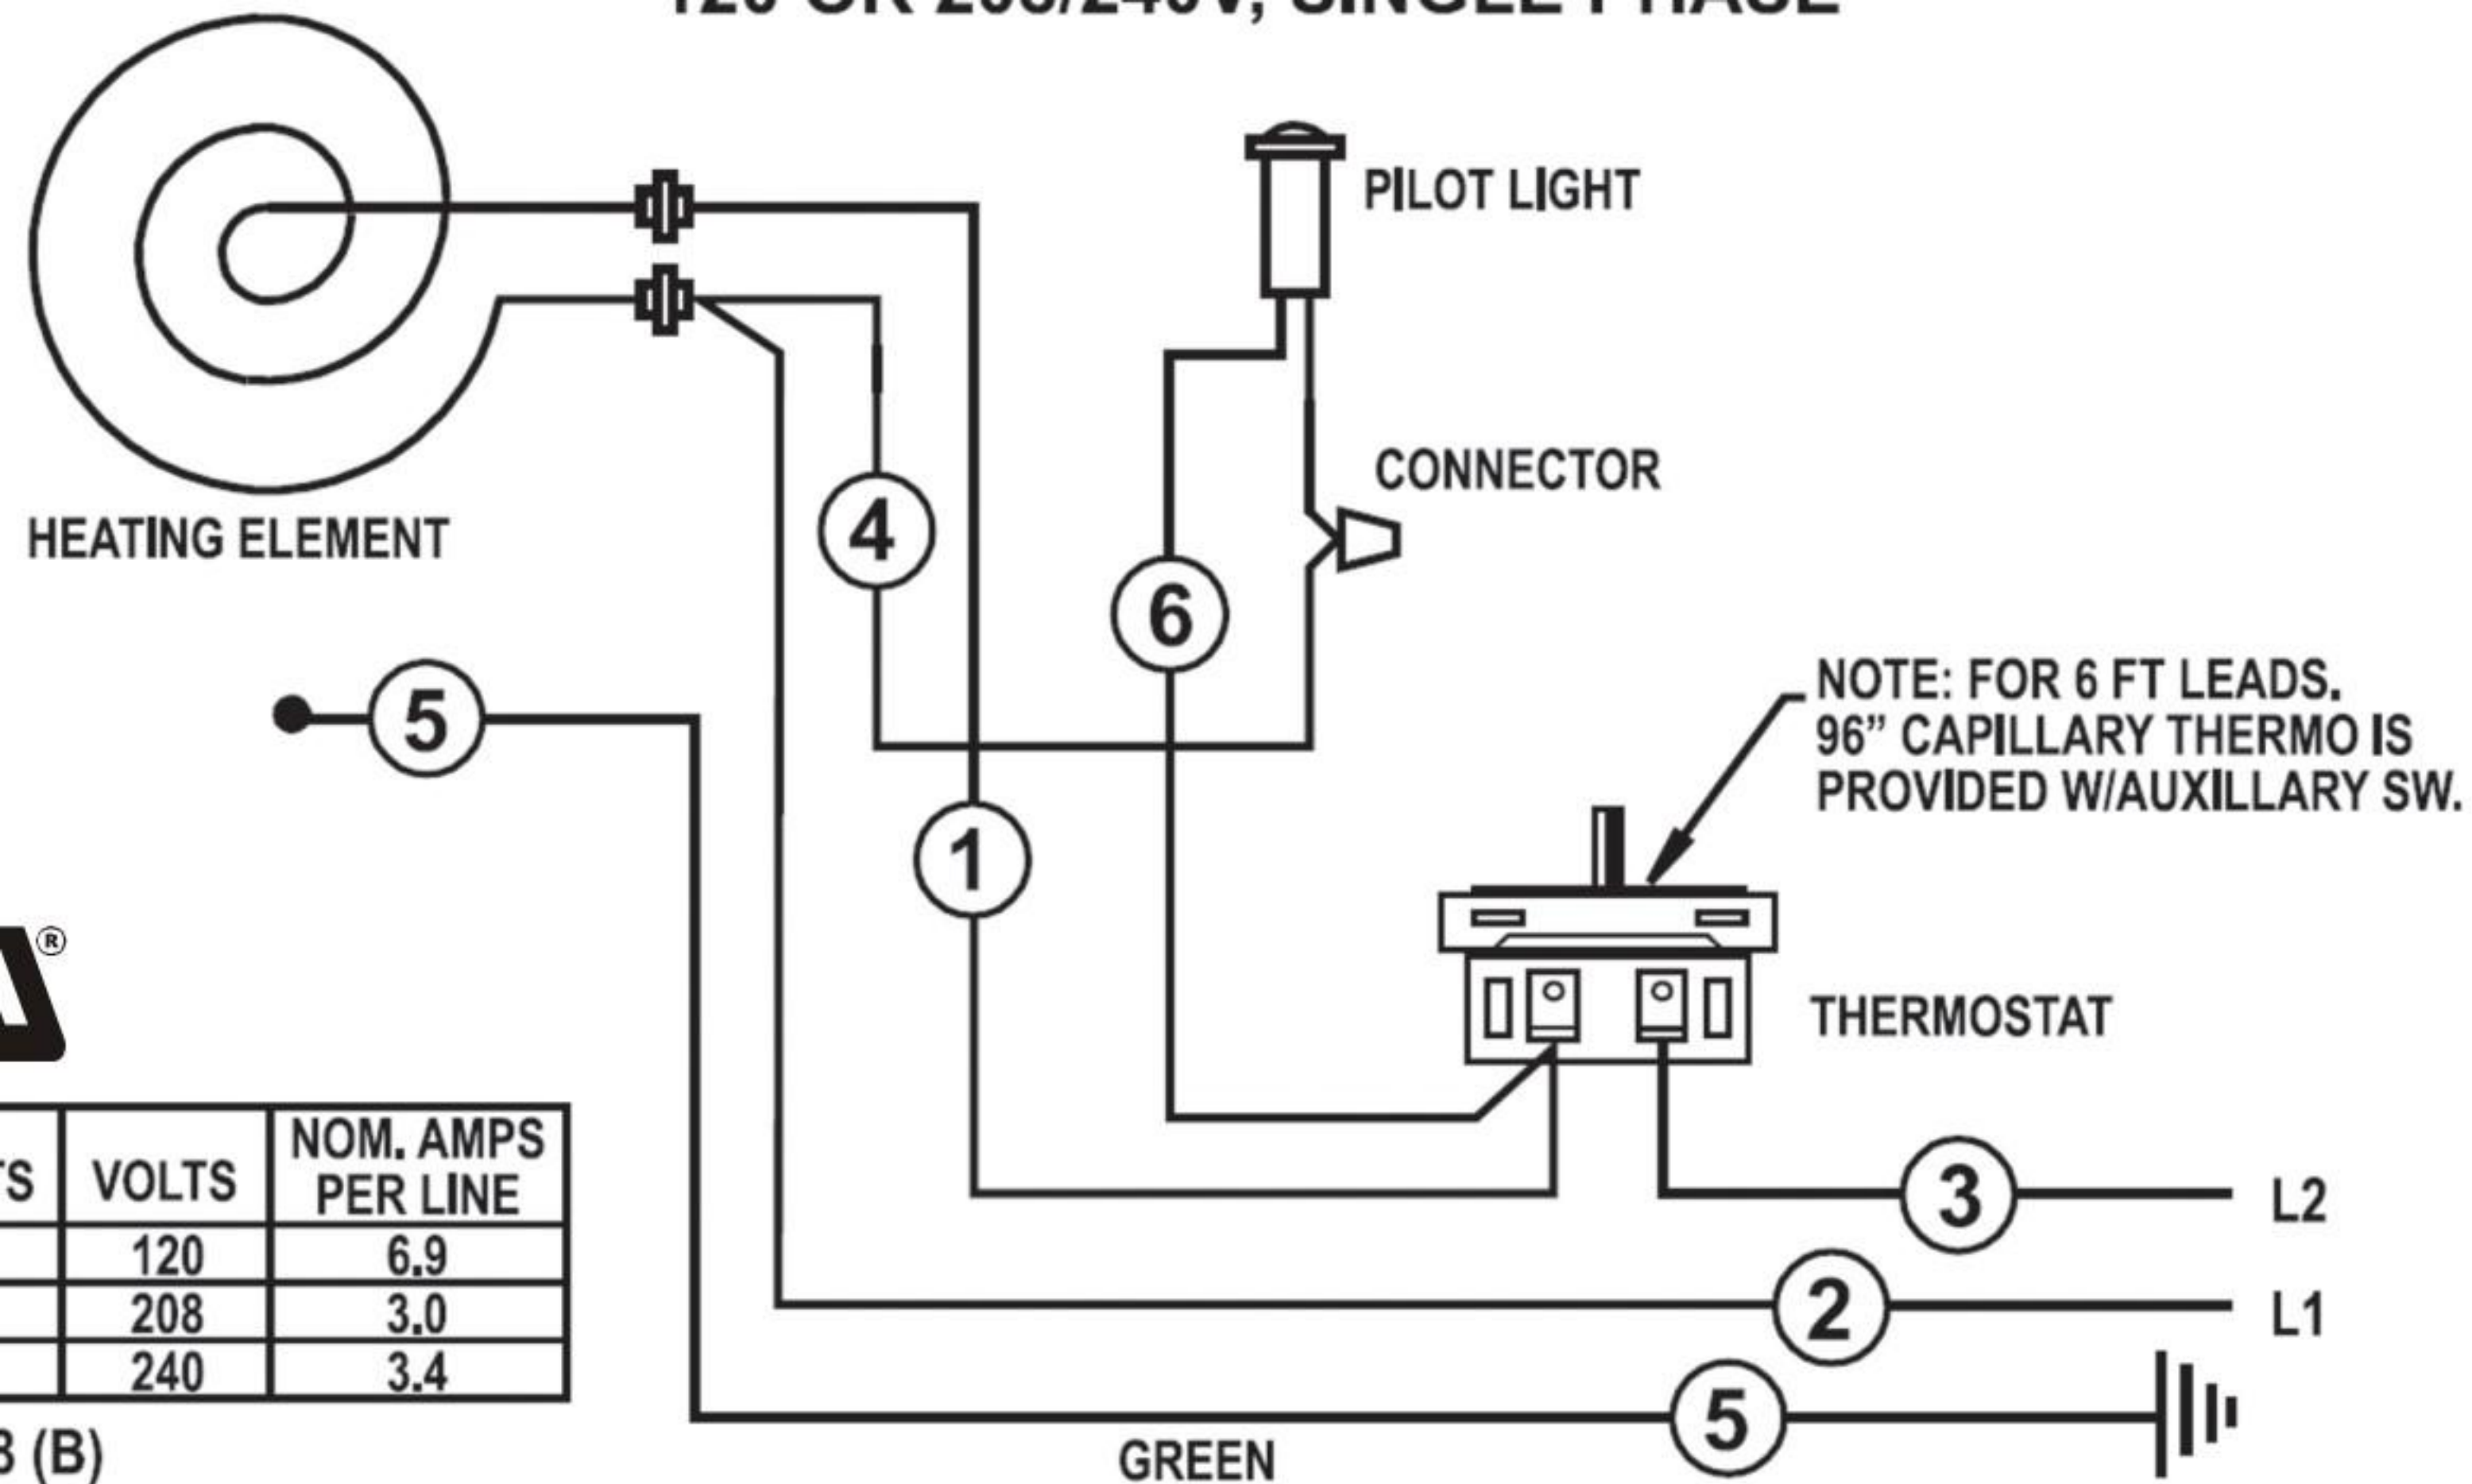

HEATER ELEMENT

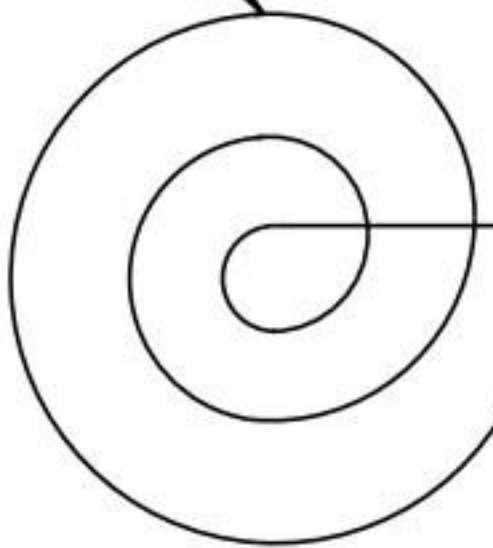

16 GA. NICKEL STRANDED APPLIANCE WIRE.

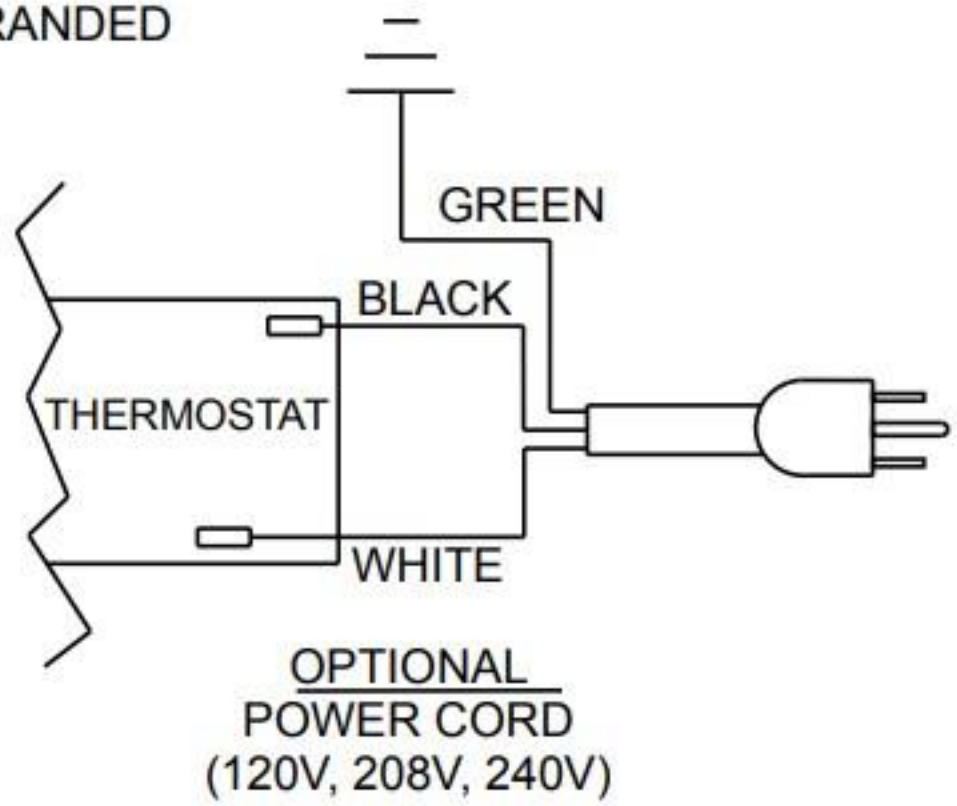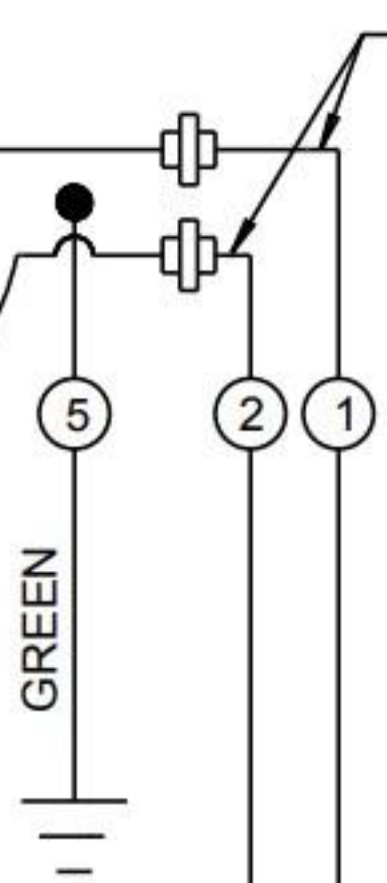

|       |       |                    |
|-------|-------|--------------------|
| 825   | 240   | 3.4                |
| 620   | 208   | 3.0                |
| 825   | 120   | 6.9                |
| 450   | 240   | 1.9                |
| 338   | 208   | 1.6                |
| 450   | 120   | 3.8                |
| WATTS | VOLTS | NOM. AMPS PER LINE |

PILOT LIGHT

