


WVAE-30F & VAE-30F
 120 OR 240, 208V OR 240V, 90W w/BUZZER
 WIRED 30 AS SHOWN

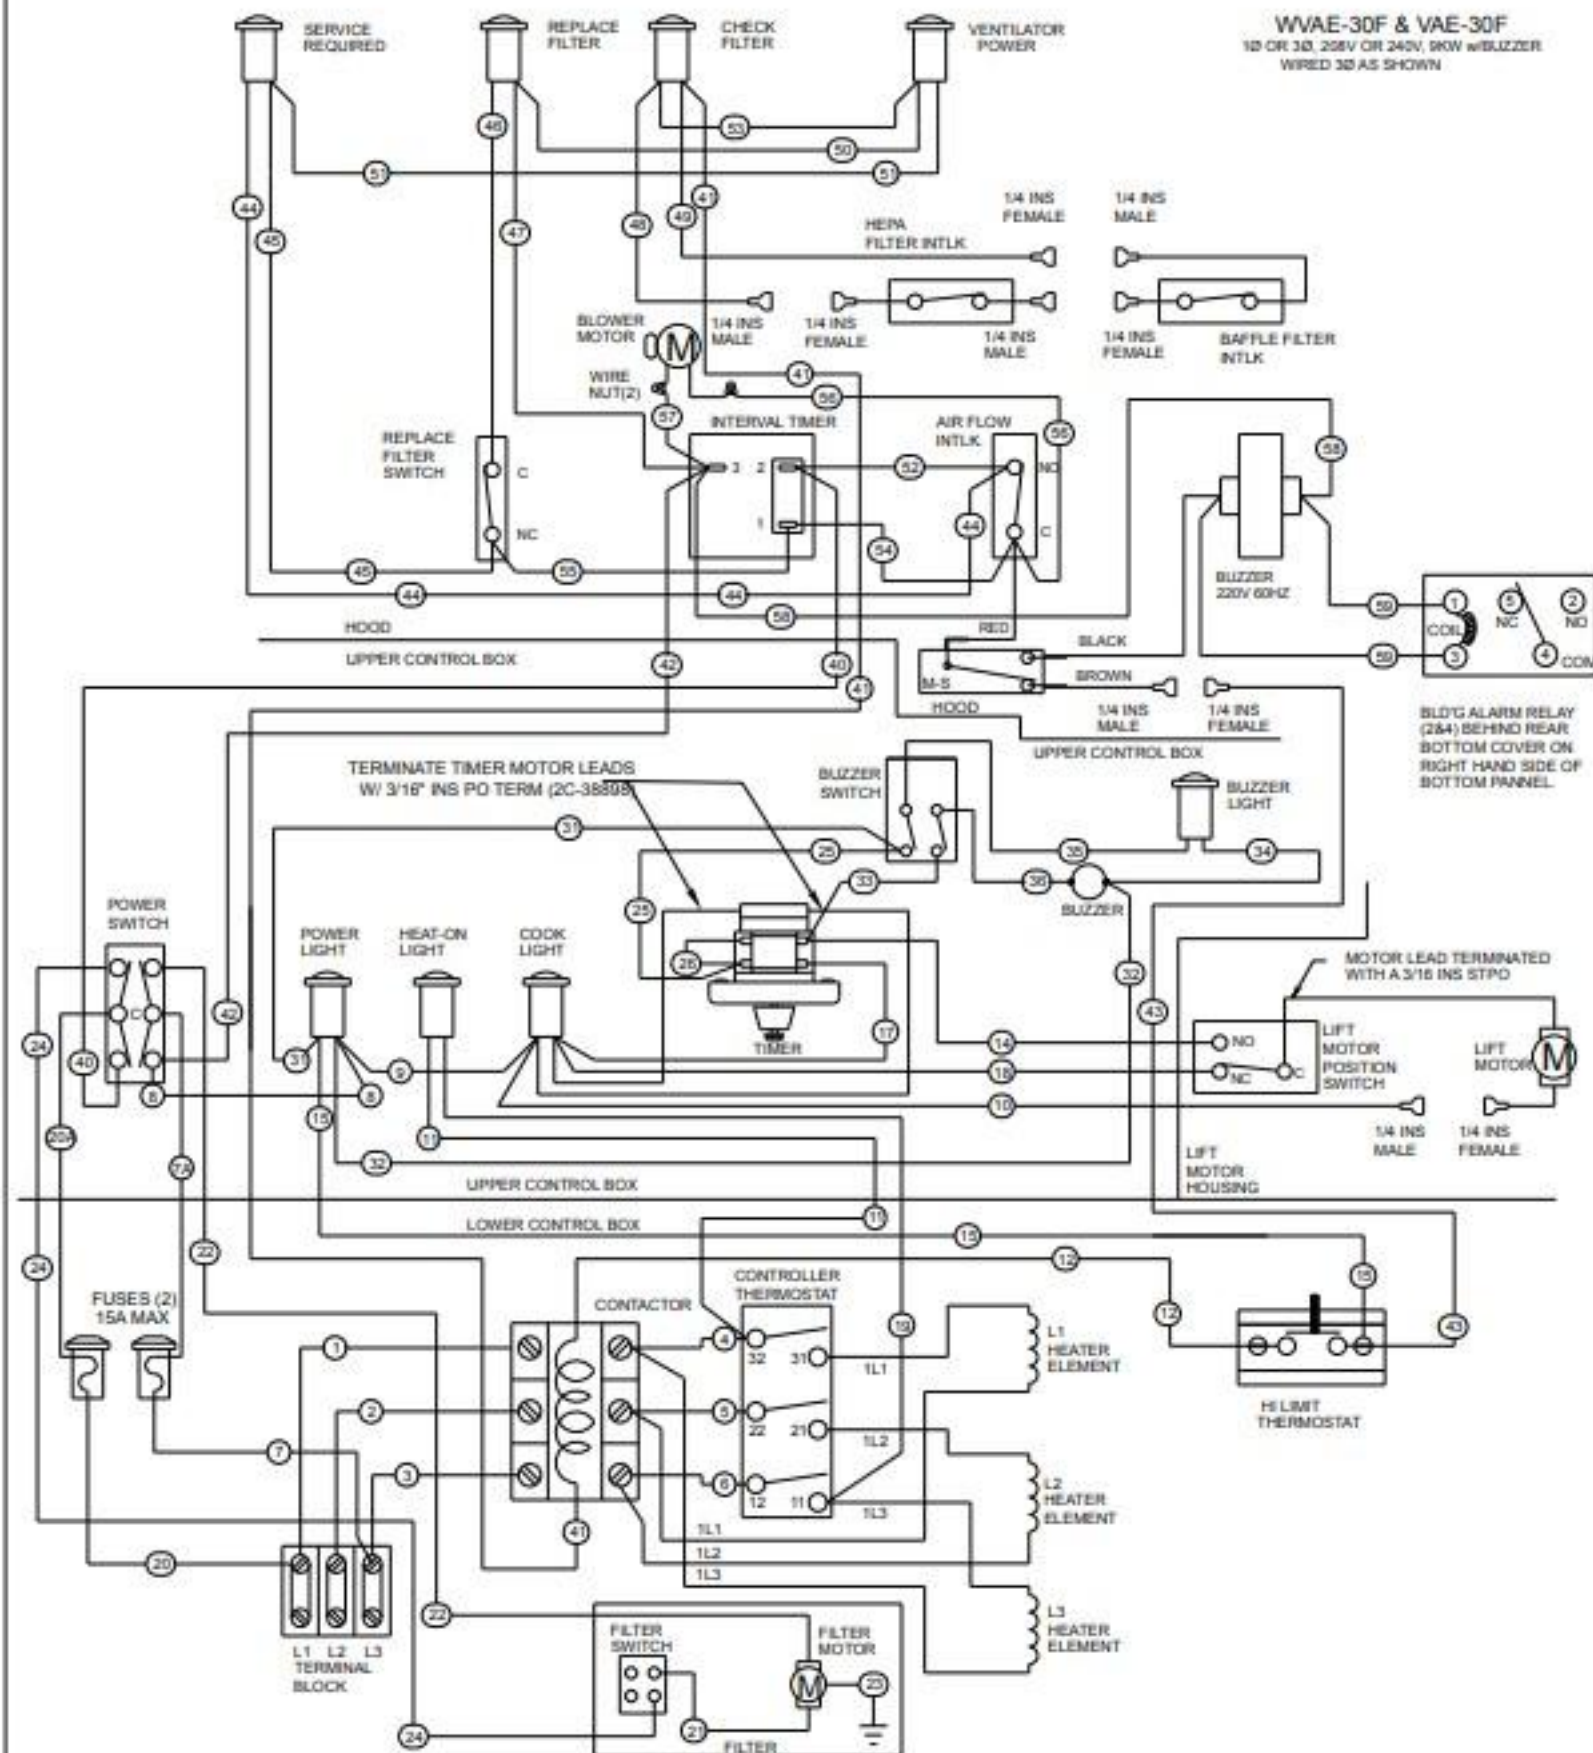


TERMINAL BLOCK
(POLE 1 OF 3)


TERMINAL BLOCK
(POLE 2 OF 3)


TERMINAL BLOCK
(POLE 3 OF 3)

G	SEE ECN-13375	ISSUE	DO NOT SCALE DWG.	TOL.	PART NAME	USED ON	DEC.	0.0	±0.030	W/PPE-30 & V	DWN.	0.00	±0.020	SCALE	NONE	MATERIAL	3x5 L	W/FE
F	SEE FCN-12262				SCHEMATIC, W													
E	SEE FCN-11683																	
D	SEE FCN-11136																	
C	SEE FCN-10010																	

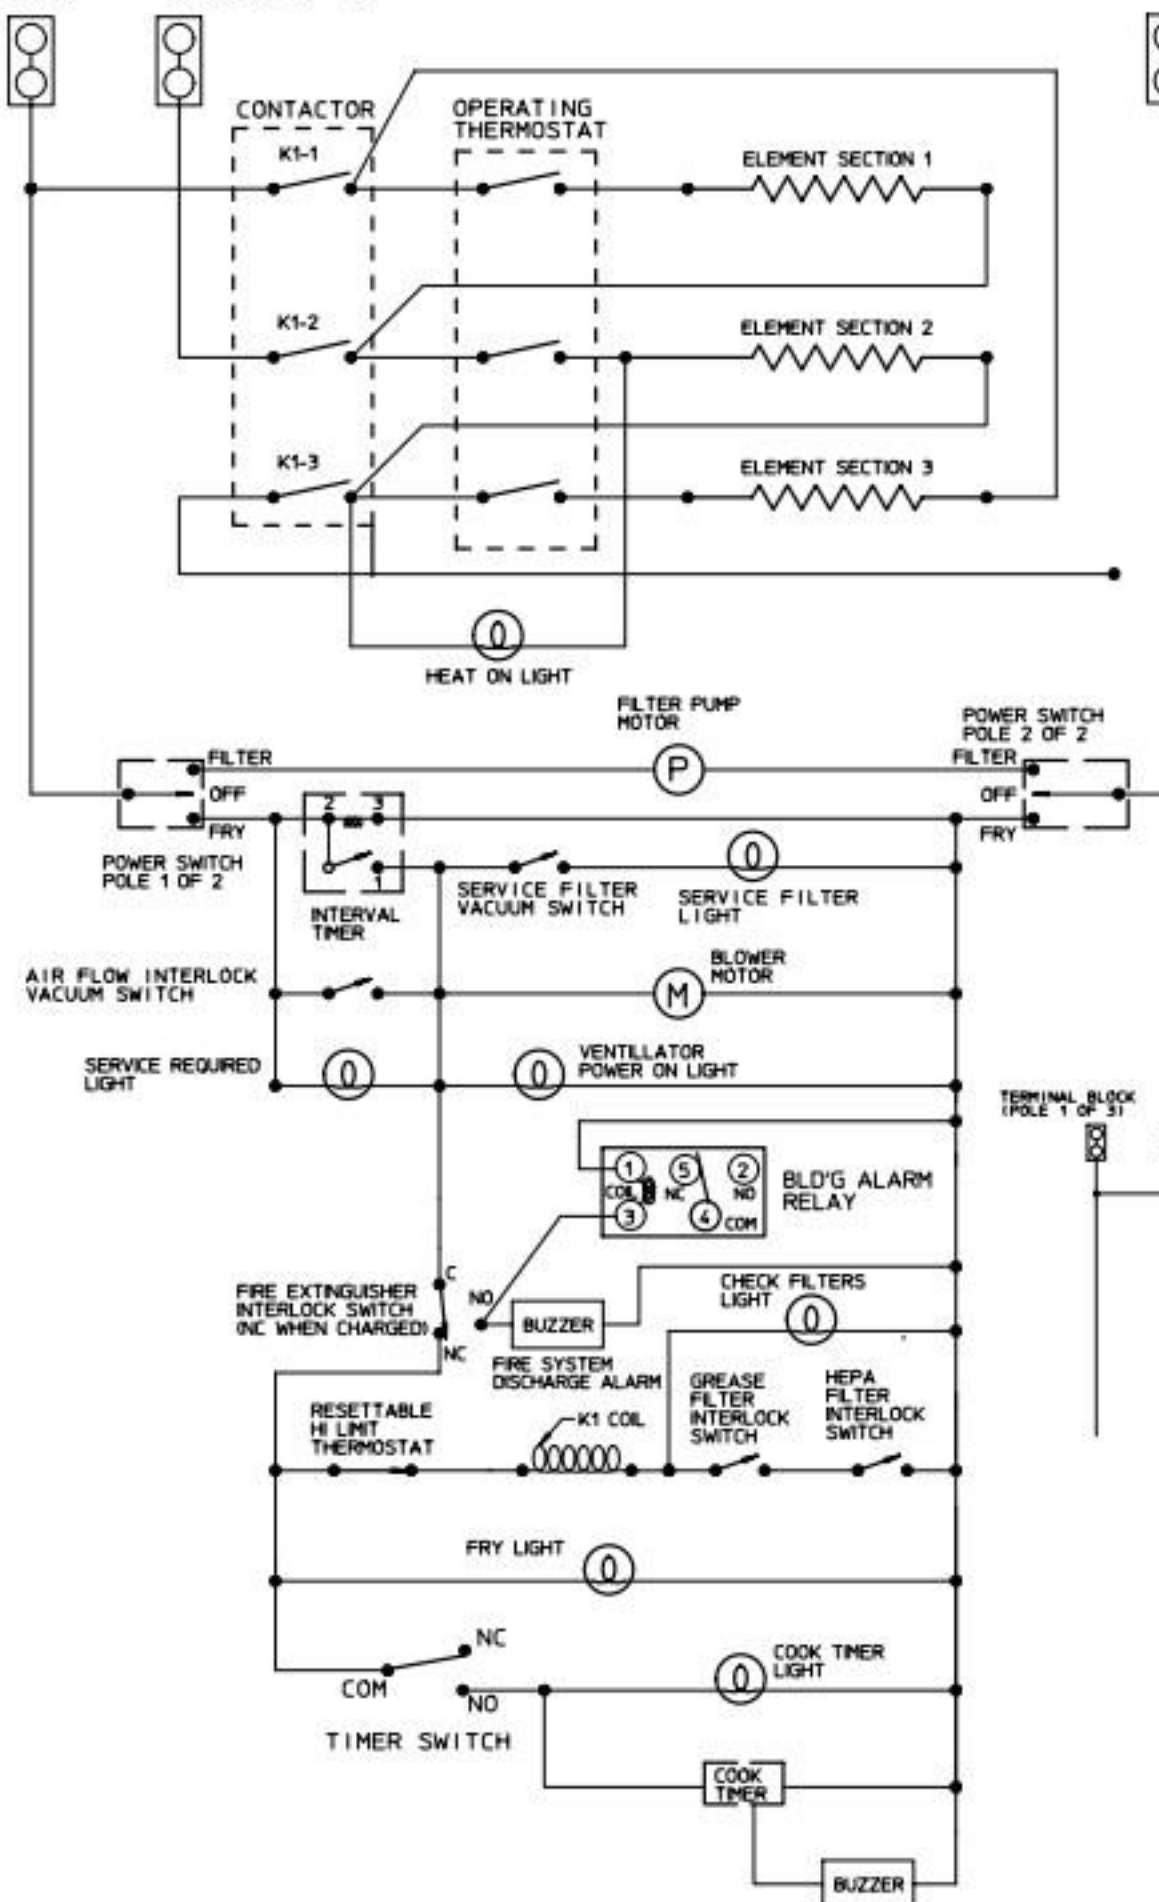

10 CONVERSION
10, 208 OR 240V, 9KW

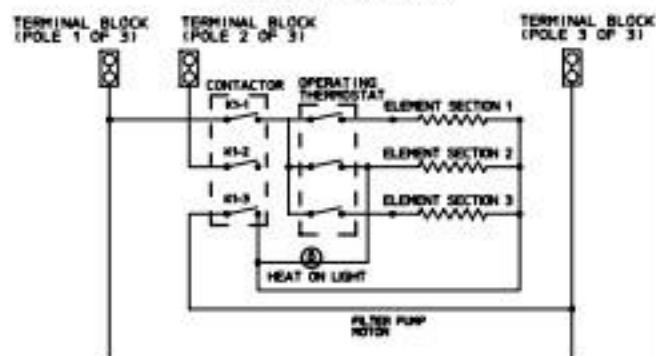

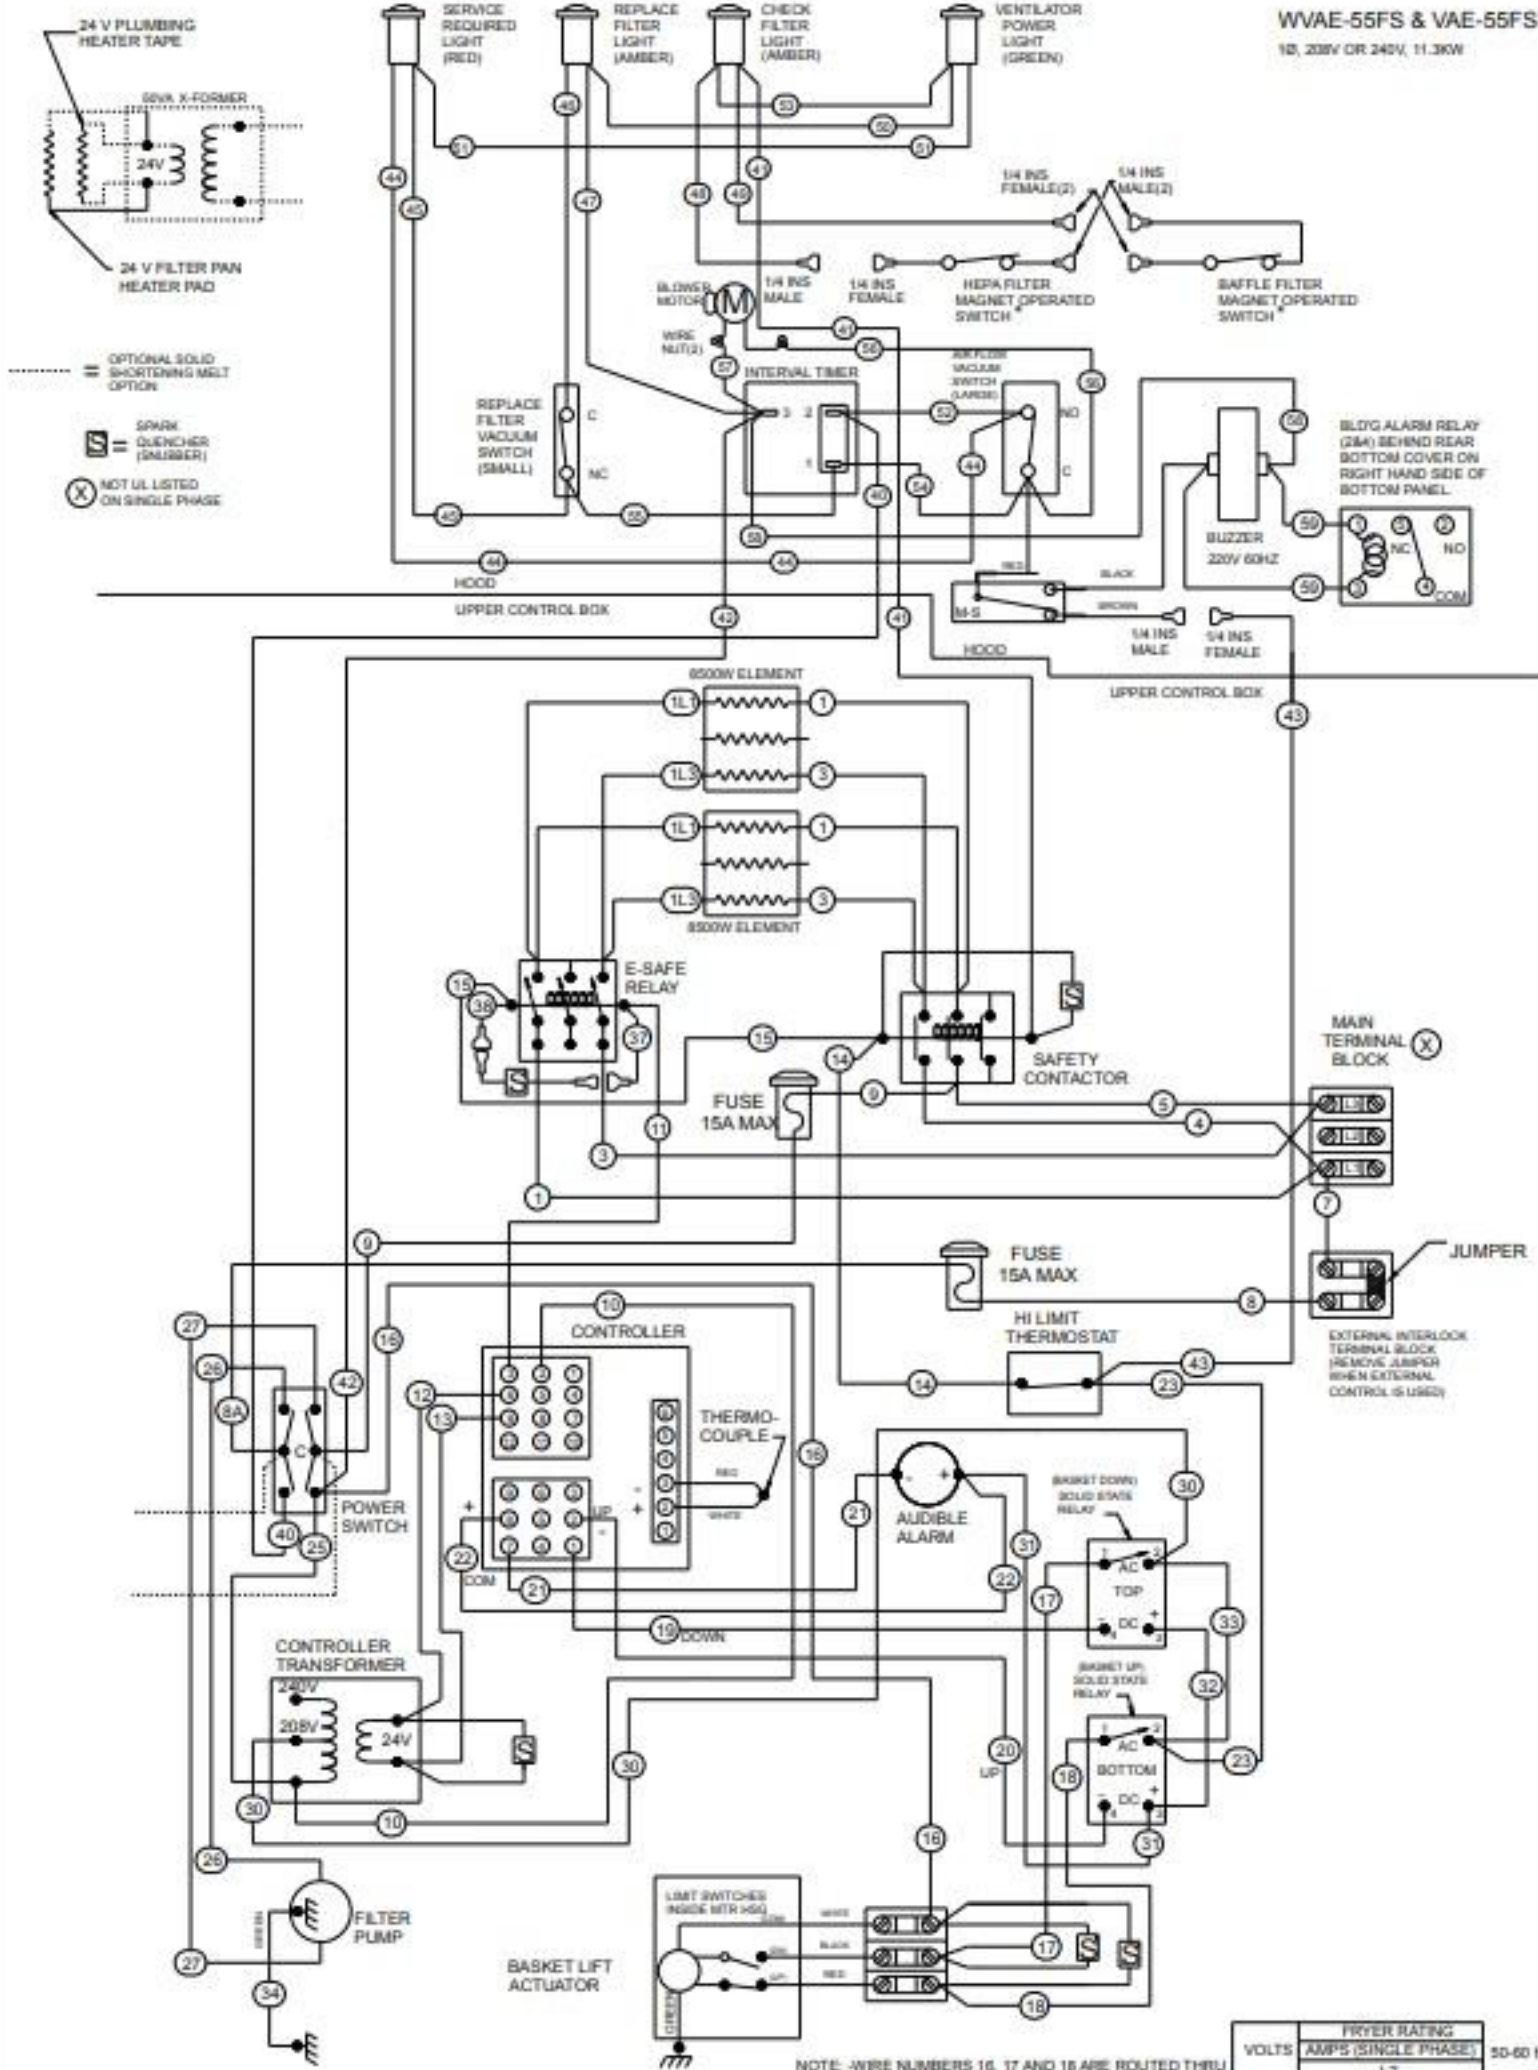

VOLTS	FRYER RATING		50-60 HZ
	AMPS (SINGLE PHASE)	L2	
208	55		

