CATALOG OF REPLACEMENT PARTS



OV500 GAS RACK OVENS

ML-132521	OV500G1
ML-132523	OV500G2


A product of BAXTER MFG. CO., INC. 19220 STATE ROUTE 162 EAST, ORTING, WA 98360

FORM 43278 Rev. H (January 2022)

 © BAXTER MFG. 2022

Table of Contents


5 COMPONENT BOX (SINGLE RACK) (ML-132521)
7 COMPONENT BOX (DOUBLE RACK) (ML-132523)
9 CONTROL CABINET, DOOR, AND CONTROLLER
11 CABINET (SINGLE RACK) (ML-132521)
13 CABINET (DOUBLE RACK) (ML-132523)
15 HOOD (SINGLE RACK) (ML-132521)
17 HOOD (DOUBLE RACK) (ML-132523)
19 LOADING DOOR (SINGLE RACK) (ML-132521)
21 LOADING DOOR (DOUBLE RACK) (ML-132523)
23 BLOWER, PANELS, AND VENTS (SINGLE RACK) (ML-132521)
25 BLOWER, PANELS, AND VENTS (DOUBLE RACK) (ML-132523)
27 DRAFT INDUCER
29 LIFTER
31 ROTATOR
33 CARRIER
35 STEAMER ASSEMBLY (SINGLE RACK) (ML-132521)
37 STEAMER ASSEMBLY (DOUBLE RACK) (ML-132523)
39 EXTERIOR WATER SUPPLY
41 GAS BURNER AND HEAT CIRCULATION (SINGLE RACK) (ML-132521)
43 GAS BURNER AND HEAT CIRCULATION (DOUBLE RACK) (ML-132523)
45 GAS SUPPLY PLUMBING

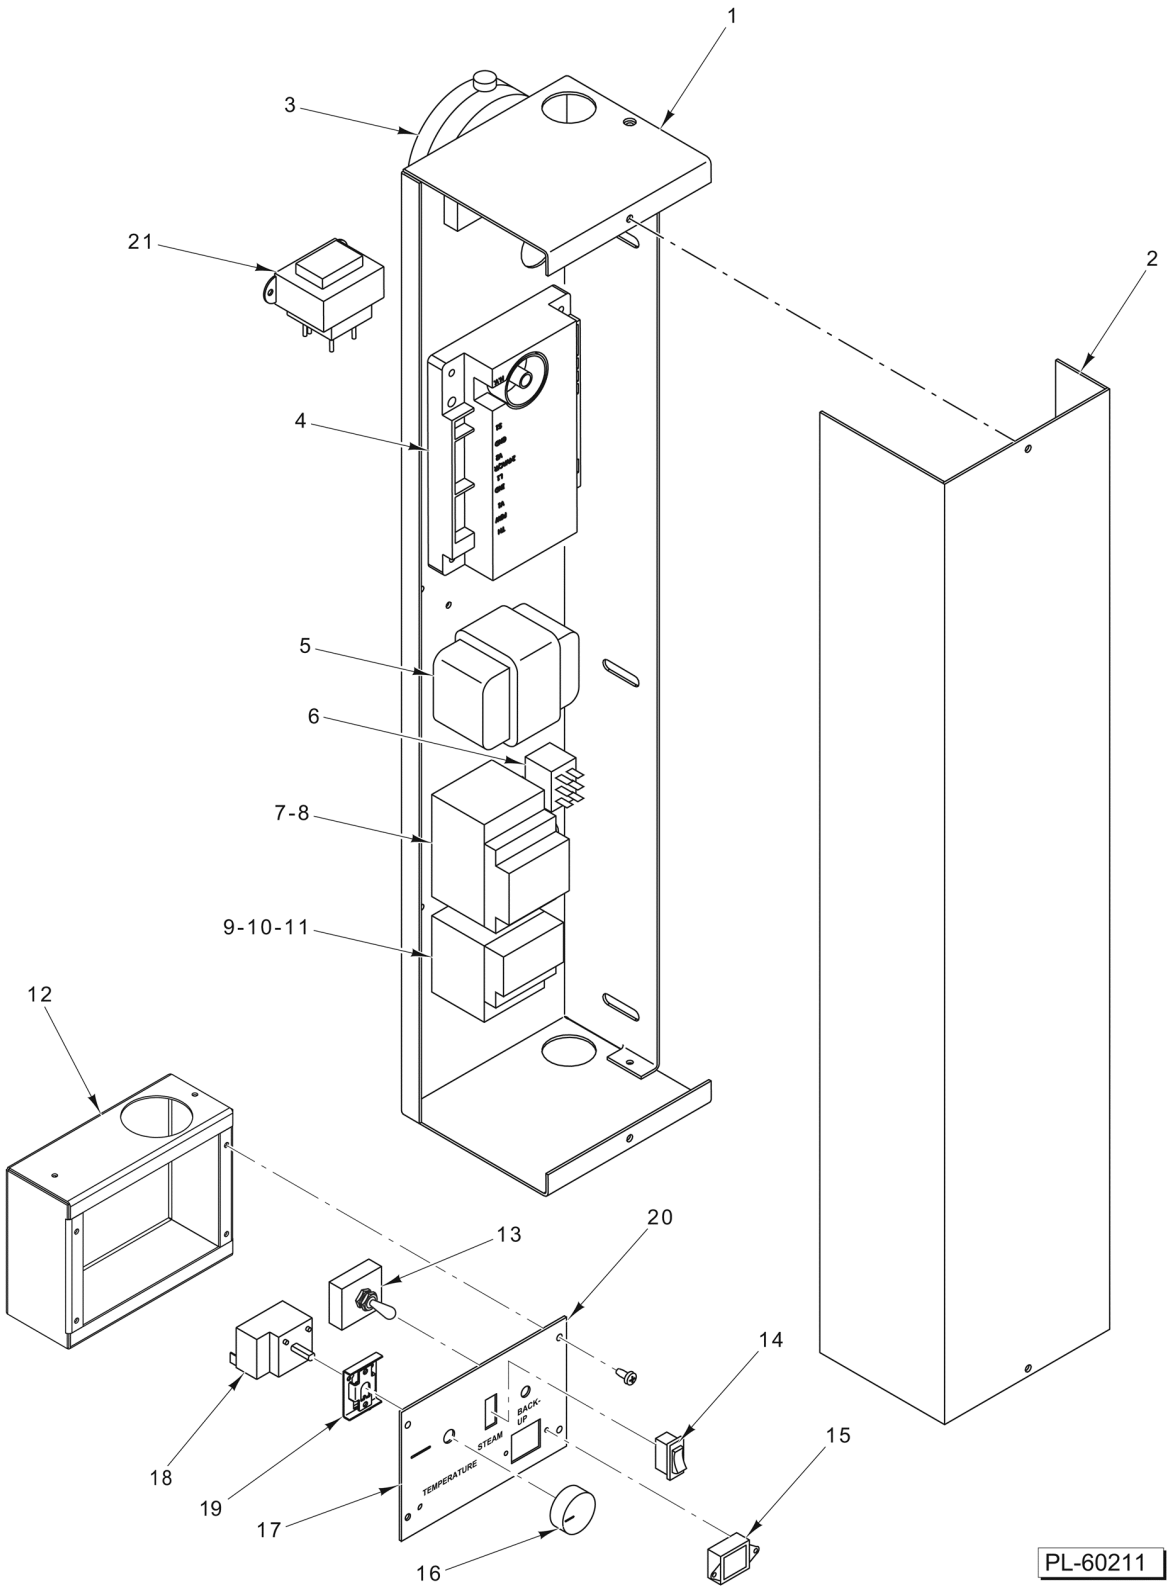

COMPONENT BOX
(SINGLE RACK) (ML-132521)

COMPONENT BOX
(SINGLE RACK) (ML-132521)


ILLUS. PL-60211	PART NO.	NAME OF PART	AMT.
1	01-1M5439-00001	Box - Component Panel	1
2	01-1M5440-00001	Cover - Component Panel	1
3	01-1M2824-00001	Switch - Pressure	1
4	01-1000V9-00170	Control - Ignition (3 TFI, No Reset)	1
5	01-100V10-00251	Transformer (120-24 V.) (With Reset)	1
6	01-1000V6-00271	Relay - D.P.D.T. (1/2 Hp., 120 VAC) (Fan)	1
7	01-1000V6-00345	Contactor (Blower Circulation) (208-240 V., 3 Ph.)	1
8	01-1000V6-00233	Contactor - Blower Circulation (208-240 V., 1 Ph.)	1
9	01-1000V6-00346	Overload (Blower Circulation) (208-240 V., 4-6 Amp., 3 Ph.)	1
10	01-1000V6-00264	Overload (Blower Circulation) (208-240 V., 9-13 Amp., 1 Ph.)	1
11	01-1000V6-00347	Overload (Blower Circulation) (480 V., 1.2-2.5 Amp., 3 Ph.)	1
12	01-1M5493-00001	Box - Back-up Controls	1
13	01-1000V6-00220	Switch - Toggle 4 PDT	1
14	01-1000V6-00221	Switch - MOM Transfer	1
15	01-1000V6-00070	Relay - D.P.D.T. (1/4 Hp., 120 VAC) (Back-Up Controls)	1
16	01-100V18-00173	Knob - Thermostat (Back-Up Controls)	1
17	01-1M5084-00001	Plate - Back-Up Control ID	1
18	01-1000V6-00265	Thermostat - 500 Deg. (Back-Up Controls)	1
19	01-1M5894-00001	Bracket - Back-Up	1
20	01-1M5083-00001	Back-Up Control Unit (Incls. Items 13 thru 18)	1
21	01-100V10-00278	Transformer (5 VA) (120-24 V.)	1

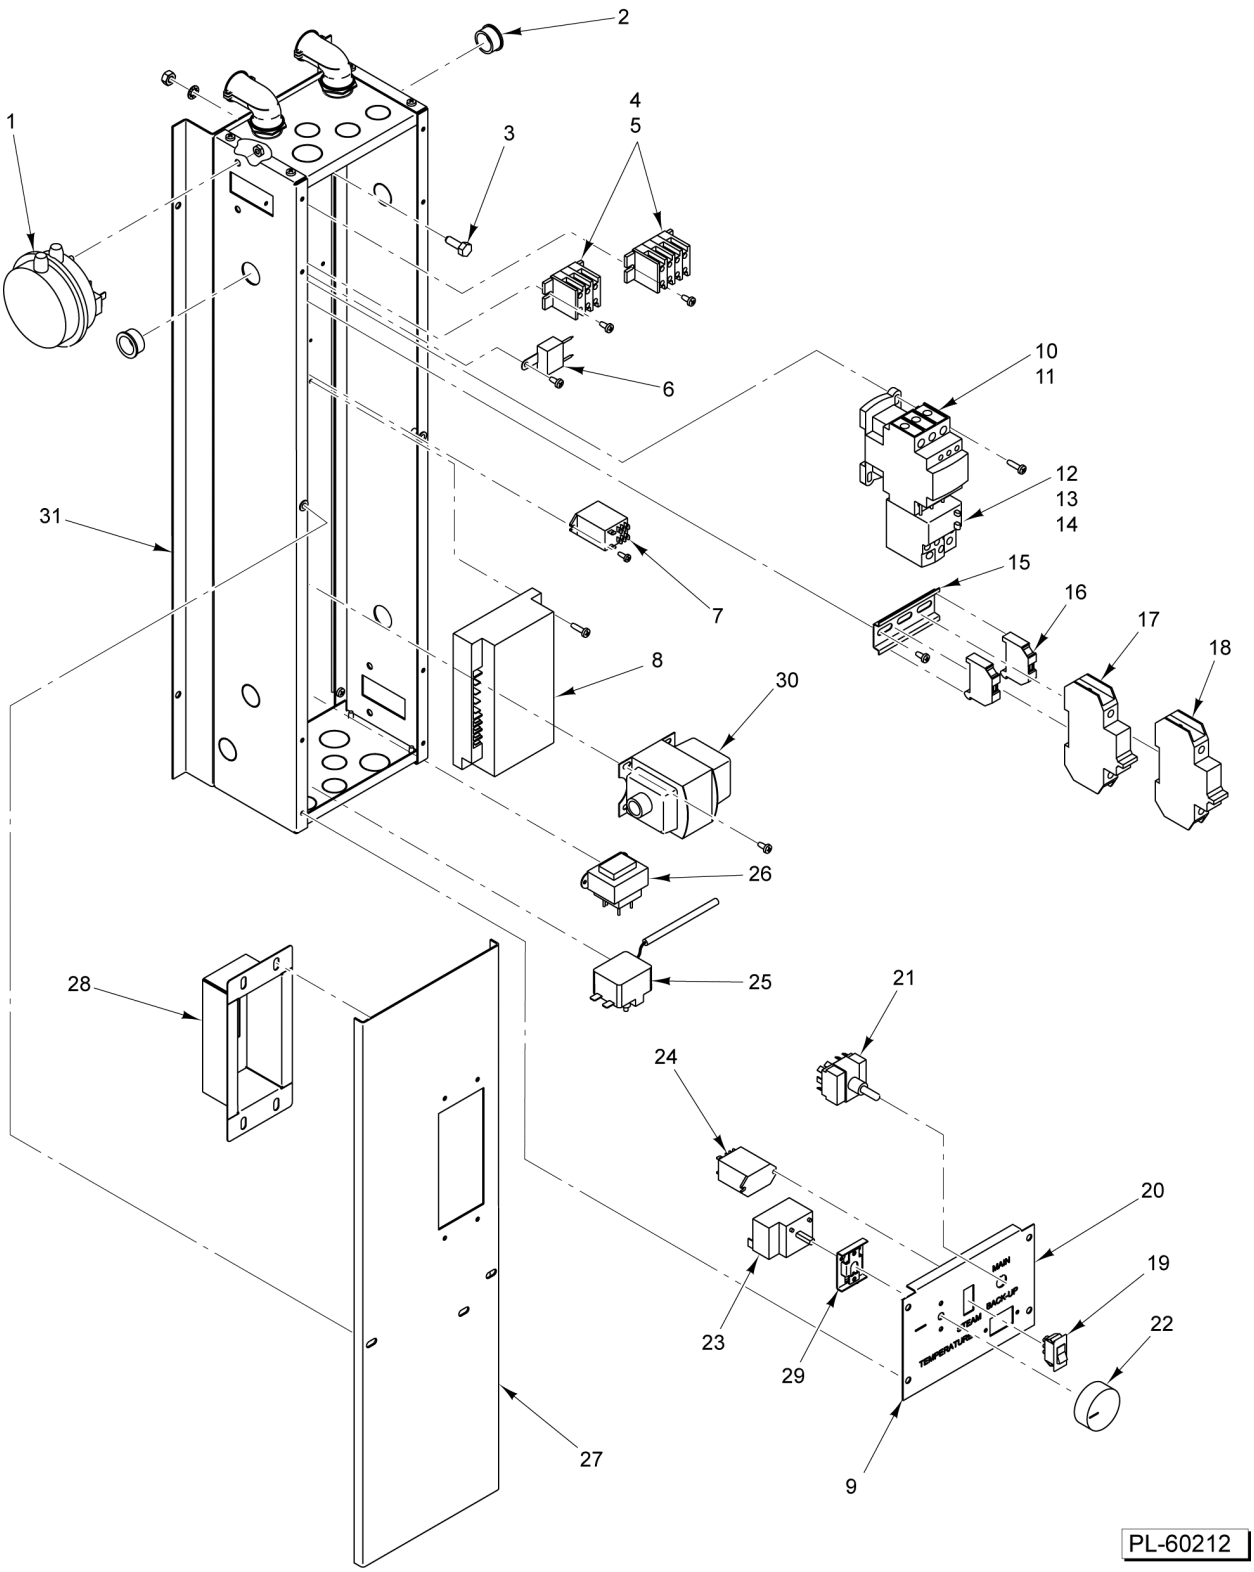

COMPONENT BOX
(DOUBLE RACK) (ML-132523)

COMPONENT BOX
(DOUBLE RACK) (ML-132523)

ILLUS. PL-60212	PART NO.	NAME OF PART	AMT.
1	01-1M2824-00001	Switch - Pressure	1
2	01-1000V5-00059	Bushing - Snap (Plastic)	2
3	01-1000V5-00101	Lug - Grounding	1
4	01-1000V5-00105	Strip - Terminal (600 V.) (Flat Base)	7
5	01-1000V5-00106	Strip End - Terminal (600 V.) (Flat Base)	2
6	01-100V10-00242	Filter - EMI	1
7	01-1000V6-00271	Relay - D.P.D.T. (1/2 Hp., 120 VAC) (CIT)	1
8	01-1000V9-00170	Control - Ignition (3 TFI, No Reset)	1
9	01-1M5083-00001	Back-Up Control Unit (Incls. Items 19 thru 24 & 29)	1
10	01-1000V6-00345	Contactor (Blower Circulation) (208-240/480 V., 3 Ph.)	1
11	01-1000V6-00233	Contactor - Blower Circulation (208-240 V., 1 Ph.)	1
12	01-1000V6-00346	Overload (Blower Circulation) (208-240 V., 4-6 Amp., 3 Ph.)	1
13	01-1000V6-00264	Overload (Blower Circulation) (208-240 V., 9-13 Amp., 1 Ph.)	1
14	01-1000V6-00347	Overload (Blower Circulation) (480 V., 1.2-2.5 Amp., 3 Ph.)	1
15	01-100V18-00115	Din Rail (9080-M H) (10 In.) (Sold Per Inch)	AR
16	01-1000V5-00252	Stop - Terminal Section End	2
17	01-1000V6-00319	Circuit Breaker (10 Amp.)	2
18	01-1000V6-00320	Circuit Breaker (13 Amp.)	1
19	01-1000V6-00221	Switch - MOM Transfer (Back-Up Controls)	1
20	01-1M5084-00001	Plate - Back-Up Control ID (Back-Up Controls)	1
21	01-1000V6-00220	Switch - Toggle 4 PDT (Back-Up Controls)	1
22	01-100V18-00173	Knob - Thermostat (Back-Up Controls)	1
23	01-1000V6-00265	Thermostat - 500 Deg. (Back-Up Controls)	1
24	01-1000V6-00271	Relay - D.P.D.T. (1/2 Hp., 120 VAC) (Back-Up Controls)	1
25	01-1000V6-00290	Thermostat - High Limit (608 Deg.)	1
26	01-100V10-00278	Transformer (5 VA) (120-24 V.) (Door Switch Circuit)	1
27	01-1M5677-00002	Cover - Component Box (Back-Up Controls)	1
28	01-1M5948-00002	Plate - Access Breaker Box	1
29	01-1M5894-00001	Bracket - Back-Up	1
30	01-100V10-00251	Transformer (120-24 V.) (With Reset)	1
31	01-1M6626-00002	Module - Electric (208-240 V., 3 Ph.) (120 V., 1 Ph.)	1

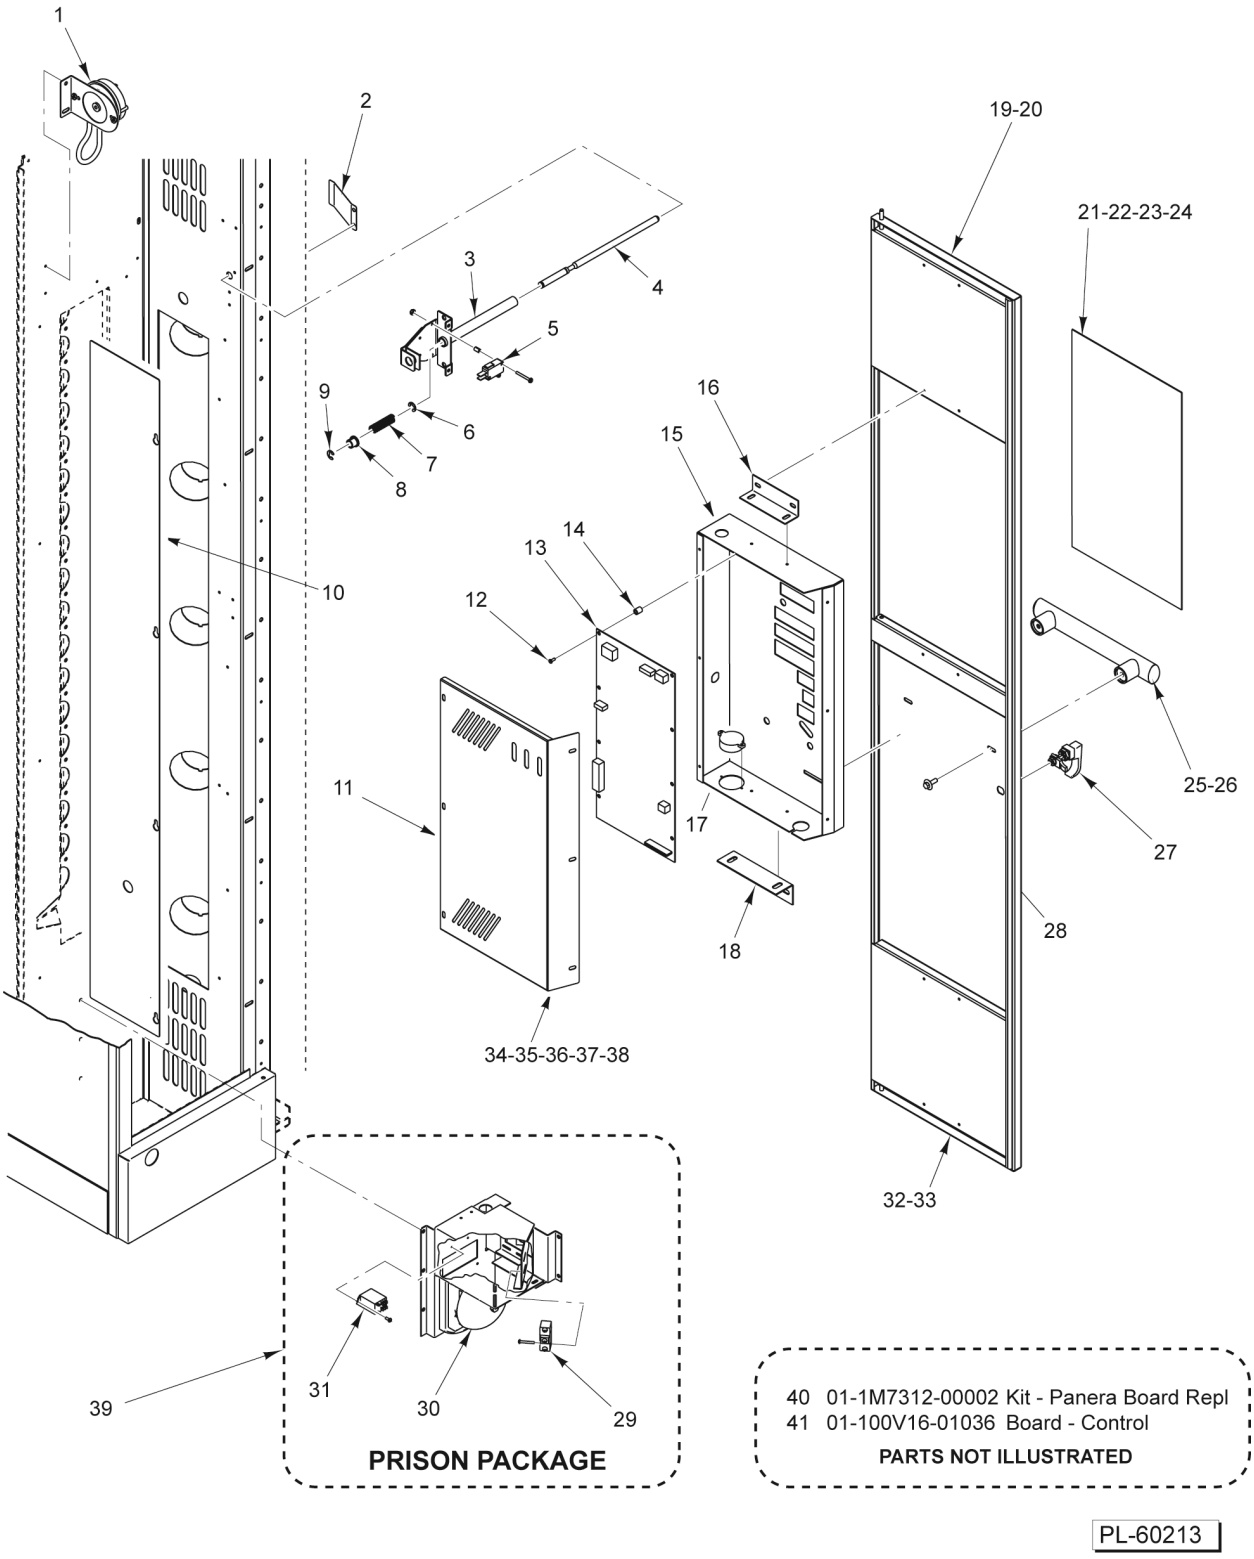


CONTROL CABINET, DOOR, AND CONTROLLER

CONTROL CABINET, DOOR, AND CONTROLLER

ILLUS. PL-60213	PART NO.	NAME OF PART	AMT.
1	01-1M5973-00001	Switch Assy. - Pressure	1
2	01-1M6157-00101	Guide - Actuator Rod	1
3	01-1M6478-00001	Door Switch Assy. (Spring Loaded) (Incls. Items 4 thru 9)	1
4	01-1M6478-00101	Rod - Actuator	1
5	01-1000V6-00343	Switch - Lever SPST	2
6	01-1000V1-00078	Clip - E-Door	1
7	01-100V20-00027	Spring - Compression	1
8	01-1M6478-00103	Bearing (Bronze)	1
9	01-1000V1-00078	Clip - E-Door	1
10	01-1M5150-00001	Cover - Light Access	1
11	01-1M6216-00102	Cover - Control Box	1
12	01-1000V4-00336	Nut #10-32 W/ Lockwasher (SST)	8
13	01-100V16-00565	PC Board - Control	1
14	01-1000V5-00164	Spacer (PC Board)	8
15	01-1M6219-00001	Body - Control Box (With Weld Studs)	1
16	01-1M5482-00001	Bracket	1
17	01-100V10-00223	Alarm - Piezo Pre-wired	1
18	01-1M5482-00001	Bracket	1
19	01-1M6129-00008	Door - Control Assy. (Incls. Items 16, 18, 25, 27, & 28) (ML-132523)	1
20	01-1M6129-00005	Door - Control Assy. (Incls. Items 16, 18, 26, 27, & 28) (ML-132521)	1
21	01-100V16-00788	Label - Advanced Controls	1
22	01-100V16-00648	EPROM (Advanced)	1
23	01-100V16-0546C	Overlay - No Steps With Jog (Panera)	1
24	01-1M6949-00001	Package - Program Chip (Panera Only)	1
25	01-1M6376-00005	Handle - Door (ML-132521)	1
26	01-1M6376-00004	Handle - Control Door (ML-132523)	1
27	01-100V18-00161	Latch	1
28	01-1000V4-00283	Mach. Screw 1/4-20 x 3/4 Hex Washer Hd. (SST)	AR
29	01-1000V6-00255	Switch - Emergency Stop	1
30	01-100V10-0003B	Bell (Includes Gong & Body)	1
31	01-1000V6-00070	Relay - D.P.D.T. (1/4 Hp., 120 VAC)	1
32	01-1M6128-00005	Door Assy. - Control (ML-132521)	1
33	01-1M6128-00002	Door Assy. Control (ML-132523)	1
34	01-1M6079-00002	Kit - Burner Cover (Clean Air)	1
35	01-100V11-0030A	Connector - Seal Flex (3/8 x 90 Deg.)	2
36	01-100V16-00584	Label - Control Status (ML-132523)	1
37	01-1M6078-00001	Kit - Controller Harness	1
38	01-1M6216-00002	Kit - Advanced Control Box (Incls. Items 11 thru 15 & 17)	1
39	01-1M5640-00001	Stop Assy. - Emergency (Incls. Items 29, 30, & 31)	1
*40	01-1M7312-00002	Kit - Panera Board Replacement (Incls. Items 21 and 41)	1
*41	01-100V16-01036	Board - Control (USB Compatible)	1

* ML-132523 Only

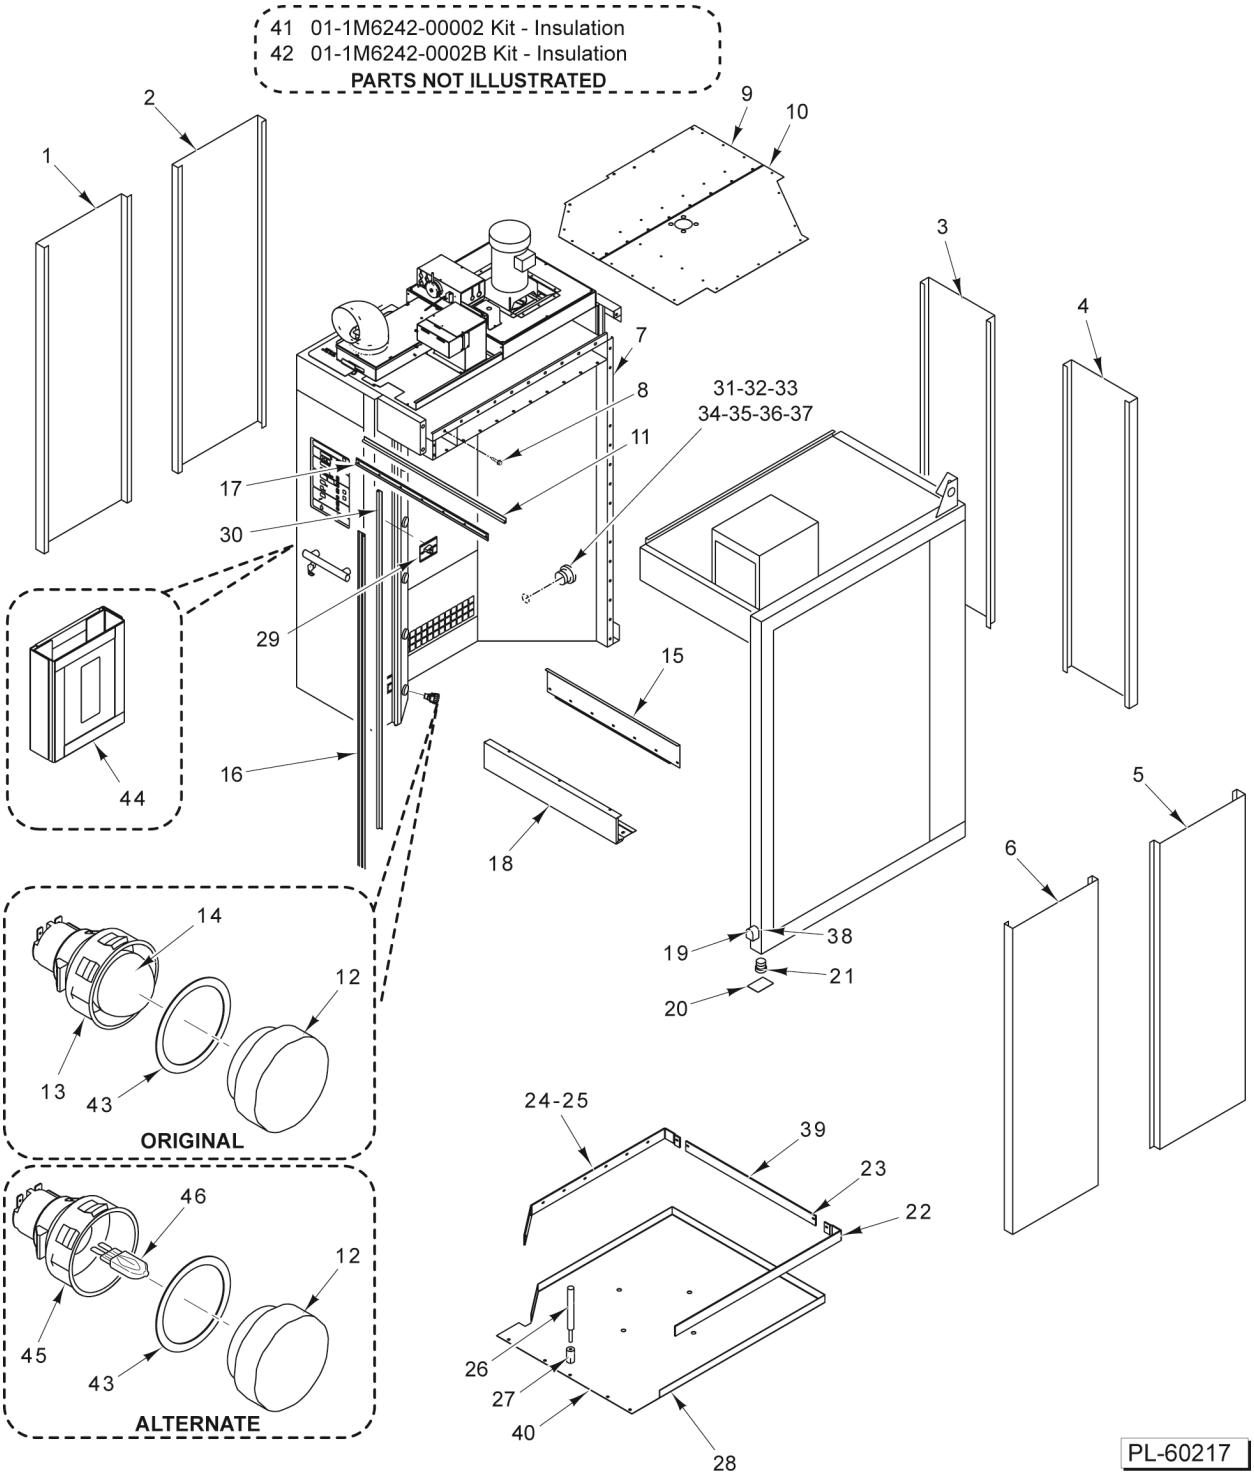


CABINET
(SINGLE RACK) (ML-132521)

CABINET
(SINGLE RACK) (ML-132521)

ILLUS. PL-60217	PART NO.	NAME OF PART	AMT.
1	01-1M5672-00002	Skin - Outer	1
2	01-1M5672-00001	Skin - Outer	1
3	01-1M5672-00002	Skin - Outer	1
4	01-1M5672-00001	Skin - Outer	1
5	01-1M5672-00002	Skin - Outer	1
6	01-1M5672-00001	Skin - Outer	1
*7	01-100V21-0065A	Tape - Fiberglass (1/8 x 1) (With Adhesive)	AR
8	01-1000V4-00283	Mach. Screw 1/4-20 x 3/4 Hex Washer Hd. (SST)	AR
9	01-1M5460-00001	Panel - False Ceiling (LH)	1
10	01-1M5460-00002	Panel - False Ceiling (RH)	1
11	01-100V16-0789C	Gasket - Loading Door (Horizontal)	1
12	01-1000V7-0027L	Lens - Glass	AR
13	01-1000V7-00027	Lamp Assy. (Incandescent) (Incls. Items 12, 14, & 43)	5
14	01-1000V7-00028	Bulb (Incandescent) (Use W/Item 13 Only)	AR
15	01-1M6119-00103	Cover - Bottom Header	1
16	01-1M6159-00101	Retainer - Gasket Loading Door (Vertical)	2
17	01-1M6159-00103	Retainer - Gasket Horizontal	1
18	01-1M6119-00101	Header - Top Door Loading	1
19	01-100V17-00302	Elbow 3/8 x 90 Deg	1
20	01-1M5610-00201	Shim	1
21	01-100V17-00259	Plug - Pipe 3/8 NPT (Brass)	1
**22	01-1M5872-00101	Trim - Floor (Right)	1
**23	01-1M5872-00102	Floor Trim (Rear)	1
**24	01-1M5872-00103	Floor Trim (Left)	1
25	01-1000V4-00283	Mach. Screw 1/4-20 x 3/4 Hex Washer Hd. (SST)	AR
26	01-1000V4-0073A	Tool - Setting (1/4 In.)	1
27	01-1000V4-00073	Anchor - Drop-In 1/4-20	1
28	01-1M5869-00001	Floor - Single	1
29	01-1M6116-00002	Ramp Lock - Weldment	2
30	01-100V16-0789A	Gasket - Loading Door (Vertical)	2
31	01-100V17-00509	Pipe - Close (3/4 In.) (Non-Rear Drain)	1
32	01-100V17-00233	Pipe 6-1/2 x 1/2 (Non-Rear Drain)	1
33	01-100V17-00650	Pipe 3/4 x 2-1/2 NPT (Non-Rear Drain)	1
34	01-100V17-00510	NLA - Obsolete--Tee 3/4 CRES-DRAIN (Non-Rear Drain)	1
35	01-100V17-00516	Elbow - Street 3/4 x 90 Deg. (Rear Drain)	1
36	01-100V17-00517	Fitting 3/4 (Rear Drain)	1
37	01-100V17-00518	Tube 3/4 x 60 In. (Copper) (Rear Drain)	1
38	01-1M2335-00001	Wheel (For Installation)	1
*39	00-913135-00002	Gasket - Red Silicone (Use With Items 22, 23, & 24)	AR
40	01-1M5872-00001	Kit - Floor Trim (Single) (Incls. Items 22, 23, 24, & 39)	1
41	01-1M6242-00001	Kit - Insulation	1
42	01-1M6242-0001B	Insulation Kit - Single Split	1
43	01-1000V7-0027G	Gasket	AR
44	01-1P2429-00003	Kit - Thermometer Holder	AR
45	01-1000V7-00053	Lamp Assy. (Halogen) (Incls. Items 12, 43, & 46)	5
46	01-1000V7-00054	Bulb - Halogen G9 Base (Use W/Item 45 Only)	AR

* (Sold Per Inch)
** (Gaskets are not included with floor trim parts, please order item 39 separately, or order item 40.)

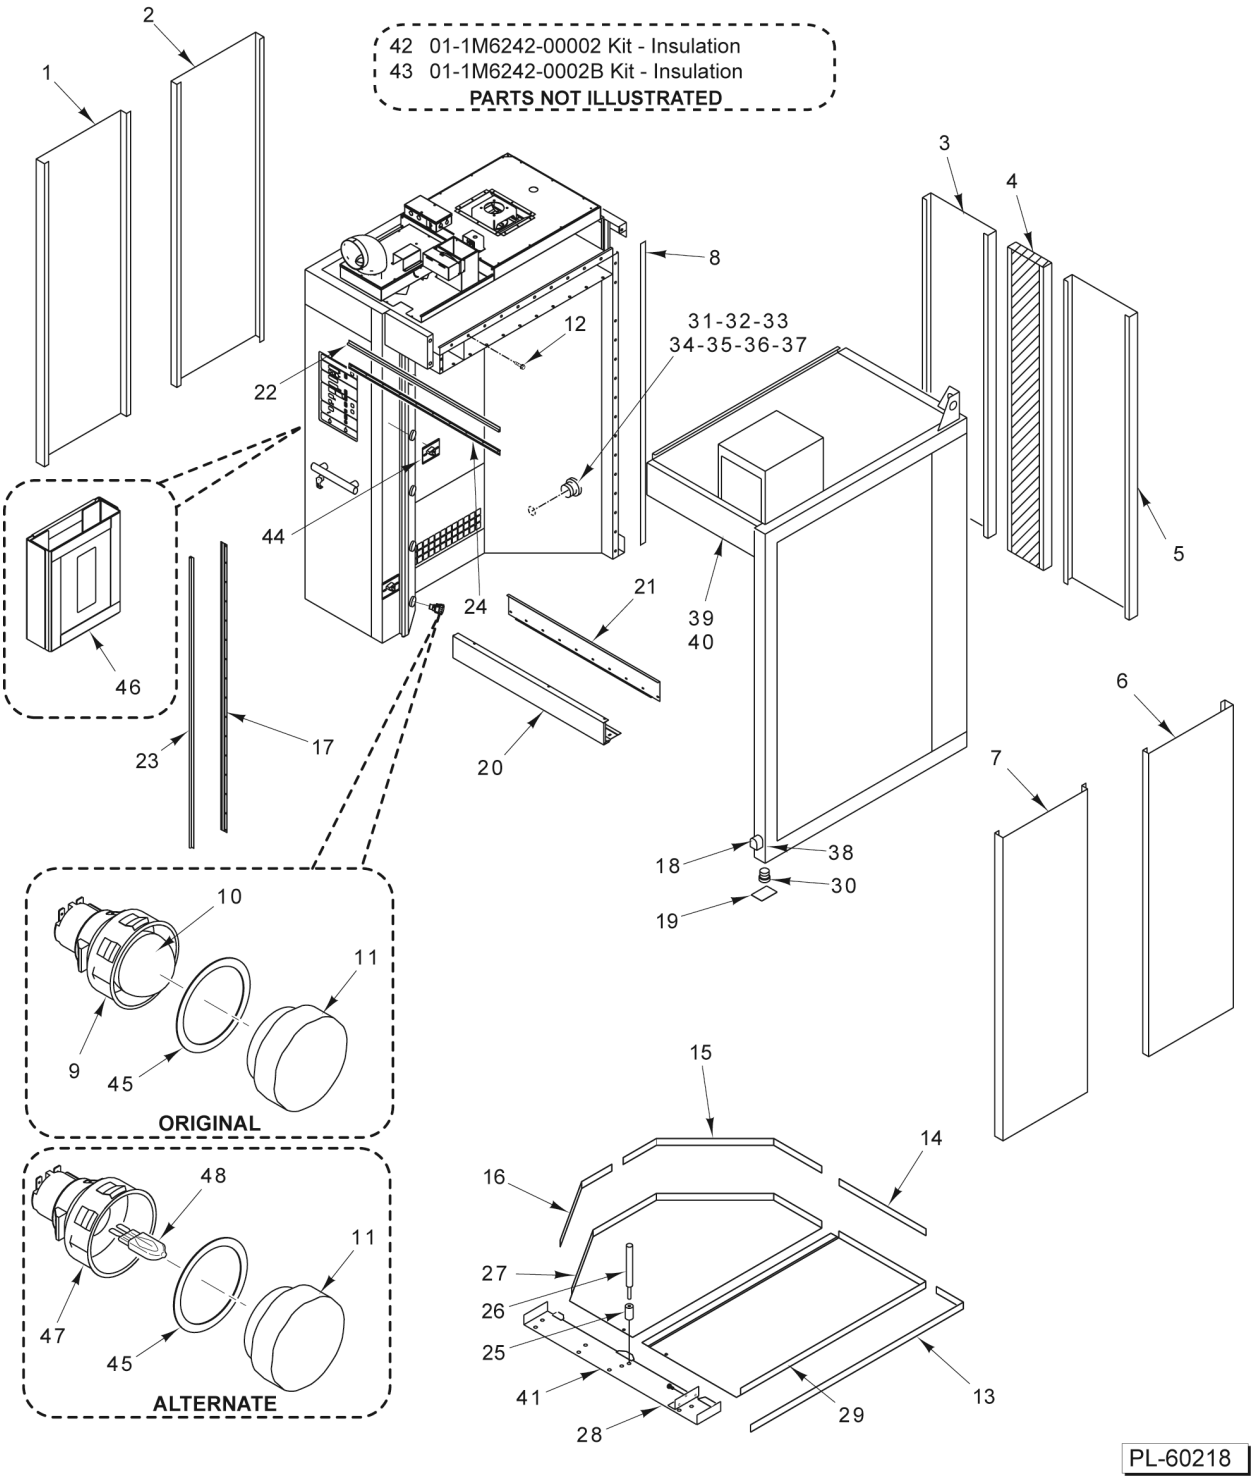


CABINET
(DOUBLE RACK) (ML-132523)

CABINET
(DOUBLE RACK) (ML-132523)

ILLUS. PL-60218	PART NO.	NAME OF PART	AMT.
1	01-1M5672-00003	Skin - Outer (Non-Symmetrical Flanges) (31 In.)	1
2	01-1M5672-00001	Skin - Outer (Symmetrical Flanges) (20 In.)	1
3	01-1M5672-00004	Skin - Outer Drain	1
4	01-1M5672-00005	Panel - Outer Wall Split	1
5	01-1M5672-00001	Skin - Outer Side	1
6	01-1M5672-00001	Skin - Outer (Symmetrical Flanges) (31 In.)	1
7	01-1M5672-00003	Skin - Outer (Non-Symmetrical Flanges) (20 In.)	1
*8	01-100V21-0065A	Tape - Fiberglass (1/8 x 1) (With Adhesive)	AR
9	01-1000V7-00027	Lamp Assy. (Incandescent) (Incls. Items 10, 11, & 45)	5
10	01-1000V7-00028	Bulb (Incandescent) (Use W/Item 9 Only)	AR
11	01-1000V7-0027L	Lens - Glass	AR
12	01-1000V4-00283	Mach. Screw 1/4-20 x 3/4 Hex Washer Hd. (SST)	AR
13	01-1M6006-00001	Trim - Floor Assy. (RH)	1
14	01-1M6006-00002	Trim Assy. - Rear Floor	1
15	01-1M6006-00003	Trim - Rear Floor (Left Rear)	1
16	01-1M6006-00004	Trim - Front Floor (Left Front)	1
17	01-1M6159-00101	Retainer - Gasket Loading Door	2
18	01-100V17-00302	Elbow 3/8 x 90 Deg. (Front Drain)	1
19	01-1M5610-00201	Shim	AR
20	01-1M6119-00201	Header - Loading Door Top	1
21	01-1M6119-00203	Cover - Header Bottom	1
22	01-100V16-0789B	Gasket - Loading Door (Horizontal)	1
23	01-100V16-0789A	Gasket - Loading Door (Vertical)	2
24	01-1M6159-00102	Retainer - Gasket Horizontal	1
25	01-1000V4-00073	Anchor - Drop-In 1/4-20	1
26	01-1000V4-0073A	Tool - Setting (1/4 In.)	1
27	01-1M5928-00201	Skin - Floor (LH)	1
28	01-1M5570-00001	Threshold Weldment	1
29	01-1M5928-00202	Skin - Floor (RH)	1
30	01-100V17-00259	Plug - Pipe 3/8 NPT (Brass)	1
31	01-100V17-00509	Pipe - Close (3/4 In.) (Non-Rear Drain)	1
32	01-100V17-00233	Pipe 6-1/2 x 1/2 (Non-Rear Drain)	1
33	01-100V17-00650	Pipe 3/4 x 2-1/2 NPT (Non-Rear Drain)	1
34	01-100V17-00510	NLA - Obsolete--Tee 3/4 CRES-DRAIN (Non-Rear Drain)	1
35	01-100V17-00516	Elbow - Street 3/4 x 90 Deg. (Rear Drain)	1
36	01-100V17-00517	Fitting 3/4 (Rear Drain)	1
37	01-100V17-00518	Tube 3/4 x 60 In. (Copper) (Rear Drain)	1
38	01-1M2335-00001	Wheel (For Installation)	1
39	01-1M6062-00002	Skin - False Ceiling (LH)	1
40	01-1M2131-00007	Skin - False Ceiling (RH)	1
41	01-1M5610-00002	Kit - Threshold Weldment (With Install Hardware)	1
42	01-1M6242-00002	Kit - Insulation	1
43	01-1M6242-0002B	Insulation Kit - Double Split	1
44	01-1M6116-00002	Ramp Lock - Weldment	2
45	01-1000V7-0027G	Gasket	AR
46	01-1P2429-00003	Kit - Thermometer Holder	AR
47	01-1000V7-00053	Lamp Assy. (Halogen) (Incls. Items 11, 45, & 48)	5
48	01-1000V7-00054	Bulb - Halogen G9 Base (Use W/Item 47 Only)	AR

* (Sold Per Foot)

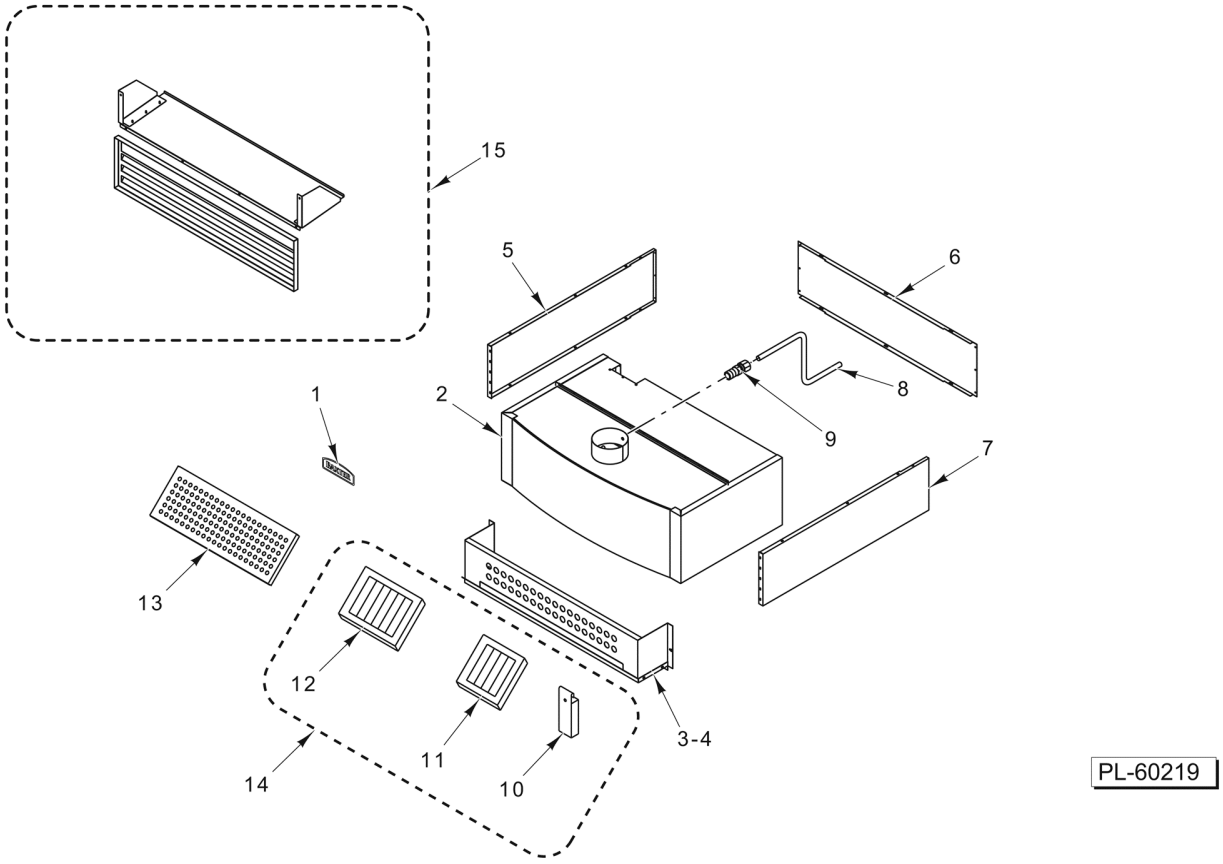


HOOD
(SINGLE RACK) (ML-132521)

HOOD
(SINGLE RACK) (ML-132521)

ILLUS. PL-60219	PART NO.	NAME OF PART	AMT.
1	01-100V16-0772B	Nameplate - Baxter Curved (9 In.)	1
2	01-1M6200-00003	Kit - Hood (Curved Front) (30 In.) (Incls. Items 1, 5, 6, & 7)	1
3	01-1M6113-00106	NLA - Obsolete--Baffle - Hood Panel Body	1
4	01-1M6113-00107	Baffle - Hood Panel Body	1
5	01-1M6115-00101	Trim - Hood Side Single	1
6	01-1M5352-00001	Trim - Rear	1
7	01-1M6115-00101	Trim - Hood Side Single	1
*8	01-100V17-00004	Tube 1/4 O.D. x 72 In. Lg. (Alum.)	1
9	FP-078-49	Fitting - Tube (1/4 In.) (Brass)	1
10	01-1M3032-00001	Cup - Hood Grease	1
11	01-100V18-00089	Filter - Hood 16 x 20 With Drop	1
12	01-100V18-00088	Filter - Hood 16 x 16 With Drop	2
13	01-1M6113-00103	Panel - Plenum Hood Single	1
14	01-1M5931-00001	Kit - Grease Filter (Single) (Incls. Items 10, 11, & 12)	1
15	01-1M6368-00001	Kit - Hood Drip Single Rack	1

* (Sold Per Inch)

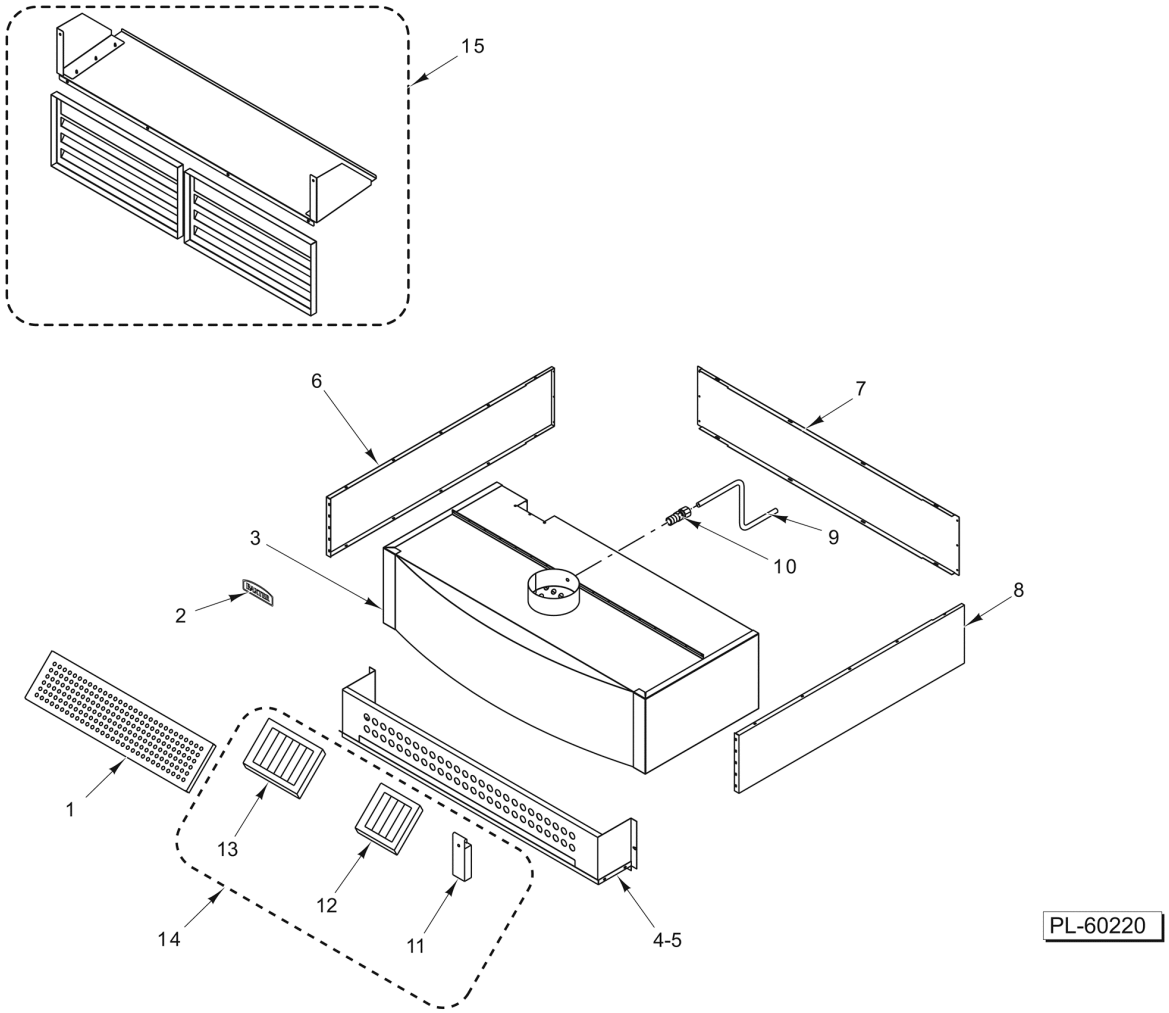


HOOD
(DOUBLE RACK) (ML-132523)

HOOD
(DOUBLE RACK) (ML-132523)

ILLUS. PL-60220	PART NO.	NAME OF PART	AMT.
1	01-1M6113-00213	Plenum - Panel Box	1
2	01-100V16-0772B	Nameplate - Baxter Curved (9 In.)	1
3	01-1M6200-00004	Kit - Hood (Curved Front) (30 In.)	1
4	01-1M6113-00211	Baffle - Hood Panel Body	1
5	01-1M6113-00212	Baffle - Hood Panel Body	1
6	01-1M6115-00201	Trim - Side	1
7	01-1M6115-00202	Trim - Rear	1
8	01-1M6115-00201	Trim - Side	1
*9	01-100V17-00004	Tube 1/4 O.D. x 72 In. Lg. (Alum.)	AR
10	FP-078-49	Fitting - Tube (1/4 In.) (Brass)	1
11	01-1M3032-00001	Cup - Hood Grease	1
12	01-100V18-00089	Filter - Hood 16 x 20 With Drop	1
13	01-100V18-00088	Filter - Hood 16 x 16 With Drop	3
14	01-1M5931-00002	Kit - Grease Filter (Double) (Incls. Items 11, 12, & 13)	1
15	01-1M6368-00002	Kit - Hood Drip Double Rack	1


* (Sold Per Inch)

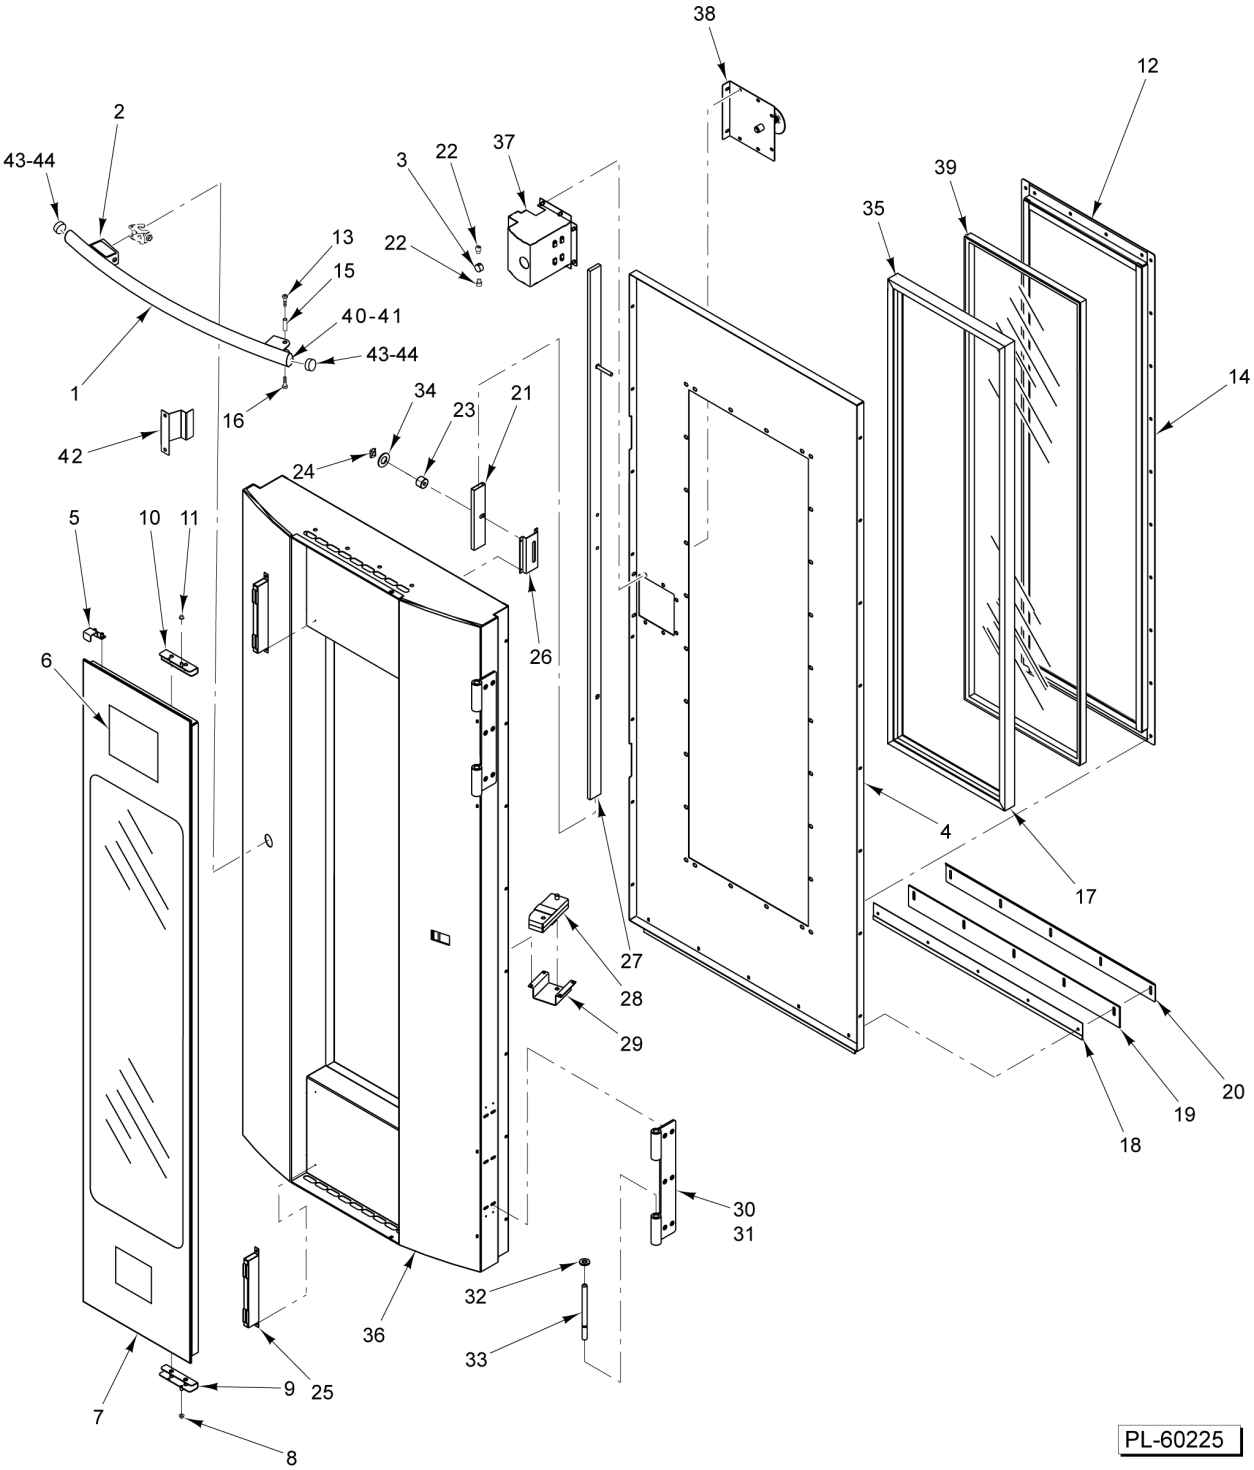

LOADING DOOR
(SINGLE RACK) (ML-132521)

LOADING DOOR
(SINGLE RACK) (ML-132521)

ILLUS. PL-60225	PART NO.	NAME OF PART	AMT.
1	01-1M6376-00001	Handle - Loading Door	1
2	01-100V16-00259	Label - Warning	2
3	01-1M6101-00102	Plug - Handle Mount	1
4	01-1M6101-00101	Skin - Inner Door	1
5	01-1M6110-00005	Bracket	1
6	01-100V16-0168C	Label - Caution (Hot)	4
7	01-1M6110-00001	Door - Access Loading Glass	1
8	01-1000V0-00095	Bearing - Glass Pivot Sleeve	1
9	01-1M6110-00002	Pivot - Bottom	1
10	01-1M6110-00003	Pivot - Top	1
11	01-1000V0-00095	Bearing - Glass Pivot Sleeve	1
12	01-1M6106-00002	Retainer - Window Horizontal	2
13		Mach. Screw 1/4-20 Phillips Flt. Hd	1
14	01-1M6105-00001	Retainer - Window Vertical	2
15	01-1M6101-00115	Pin - Handle Hinge (Curved)	1
16		Mach. Screw 1/4-20 Phillips Flt. Hd	1
17	01-100V16-00766	Gasket - Window (One-Piece Fused Corners)	1
18	01-1M6101-00112	Sweep - Inner Door	1
19	01-100V16-0779A	Gasket - Door Sweep	1
20	01-1M6101-00113	Sweep - Outer Door	1
21	01-1M6101-00210	Bearing - Lock Bar	2
22	01-1000V4-00369	Cap Screw 1/4 x 1/4 Hex Socket Hd. (Zinc-Plated)	AR
23	01-1000V0-00109	Bearing - Door Latch Roller	2
24	01-1000V1-00078	Clip - E-Door	2
25	01-1M6149-00001	Magnet - Outer Door Weldment	2
26	01-1M6101-00109	Lock - Retainer Bar	2
27	01-1M6107-00002	Bar - Lock	2
28	01-1M6166-00001	Bracket - Handle Pivot	1
29	01-1M6166-00002	Support - Handle Pivot	1
30	01-1M5918-00003	Hinge Assy. - Jamb Hinge (Incls. Item 31, 32, & 33)	2
31	01-1M5918-00301	Hinge - Door (Female)	2
32	01-1000V0-00080	Bearing - Door Hinge (Brass)	4
33	01-1M5918-00201	Pin - Hinge Loading Door	4
34	01-1000V4-00376	Washer	AR
35	01-100V21-0065A	Tape - Fiberglass (1/8 x 1)	AR
36	01-1M6199-00001	Door Assy. (Incls. Items 1 thru 35)	1
37	01-1M6108-00001	Latch Assy. (Mechanism)	1
38	01-1M7343-00001	Handle - Interior Door	1
39	01-100V16-00765	Glass - Double Pane Curved	1
40	00-913135-00228	Plug - Snap In (Round)	2
41	01-1M6103-0203B	Cap - End (Door Handle) (Oval)	AR
42	01-1M6526-00001	Bracket - Actuator, Door Switch	1
43	00-913135-00228	Plug - Snap In (Round)	2
44	01-1M6103-0203B	Cap - End (Door Handle) (Oval)	2

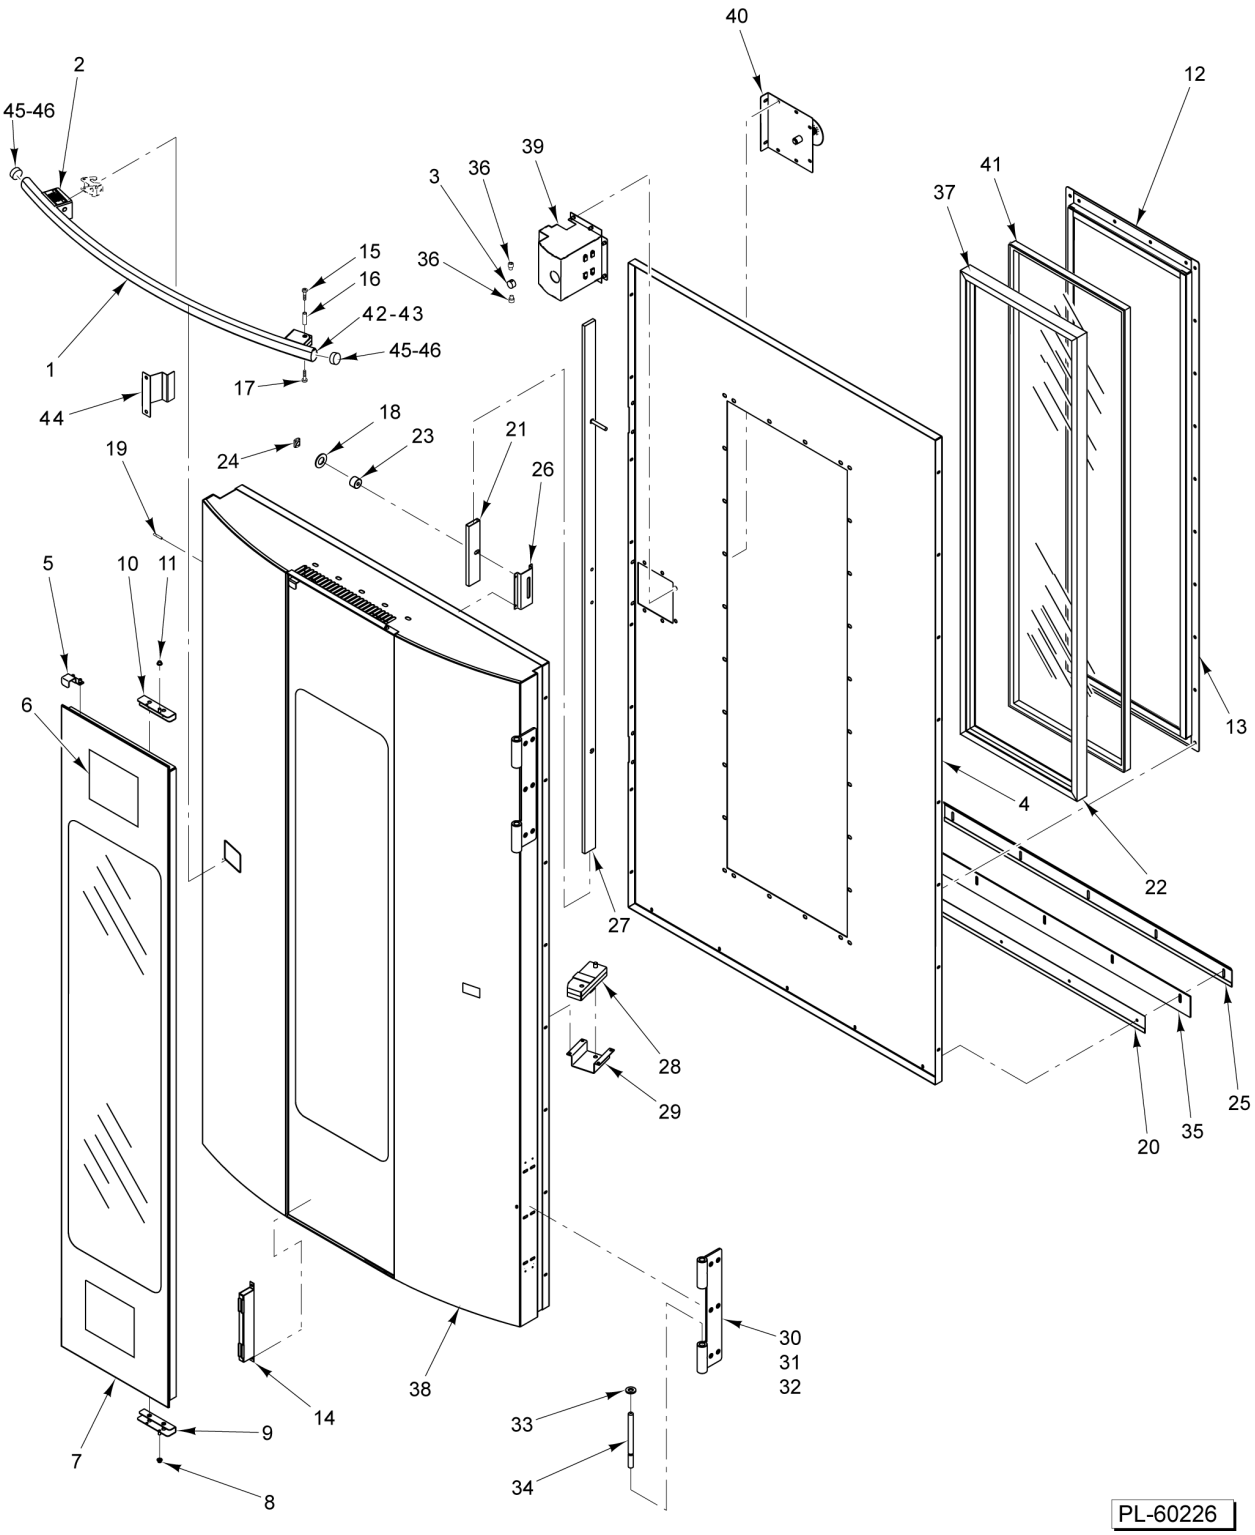


LOADING DOOR
(DOUBLE RACK) (ML-132523)

LOADING DOOR
(DOUBLE RACK) (ML-132523)

ILLUS. PL-60226	PART NO.	NAME OF PART	AMT.
1	01-1M6376-00002	Handle - Loading Door	1
2	01-100V16-00259	Label - Warning	2
3	01-1M6101-00102	Plug - Handle Mount	1
4	01-1M6101-00201	Skin - Inner Door	1
5	01-1M6110-00005	Bracket (Glass Handle)	1
6	01-100V16-0168C	Label - Caution	4
7	01-1M6110-00001	Door - Access Loading Glass (Incls. Items 5, 6, 9, & 10)	1
8	01-1000V0-00095	Bearing - Glass Pivot Sleeve	1
9	01-1M6110-00002	Pivot - Bottom	1
10	01-1M6110-00003	Pivot - Top	1
11	01-1000V0-00095	Bearing - Glass Pivot Sleeve	1
12	01-1M6106-00002	Retainer - Window Horizontal	2
13	01-1M6105-00001	Retainer - Window Vertical	2
14	01-1M6149-00002	Magnet - Outer Door Weldment (Double)	2
15		Mach. Screw 1/4-20 Phillips Flt. Hd	1
16	01-1M6101-00115	Pin - Handle Hinge (Curved)	1
17		Mach. Screw 1/4-20 Phillips Flt. Hd	1
18	01-1000V4-00376	Washer	2
19	01-100V12-00008	Rivet	8
20	01-1M6101-00202	Sweep - Inner Door	1
21	01-1M6101-00210	Bearing - Lock Bar	2
22	01-100V16-00766	Gasket - Window (One-Piece Fused Corners)	1
23	01-1000V0-00109	Bearing - Door Latch Roller	2
24	01-1000V1-00083	Retaining Ring 1/4 (SST)	2
25	01-1M6101-00203	Sweep - Outer Door	1
26	01-1M6101-00109	Lock - Retainer Bar	1
27	01-1M6107-00002	Bar - Lock	1
28	01-1M6166-00001	Bracket - Handle Pivot	1
29	01-1M6166-00002	Support - Handle Pivot	1
*30	01-1M5918-00004	Hinge Kit (Incls. Item 31, 32, 33, & 34)	2
31	01-1M5918-00301	Hinge - Door (Female)	2
32		Set Screw 10-32 x 1/4 Hex Hdls., Cup Pt	4
33	01-1000V0-00080	Bearing - Door Hinge (Brass)	4
34	01-1M5918-00201	Pin - Hinge Loading Door	4
35	01-100V16-0779B	Gasket - Door Sweep	1
36	01-1000V4-00369	Cap Screw 1/4 x 1/4 Hex Socket Hd. (Zinc-Plated)	AR
37	01-100V21-0065A	Tape - Fiberglass (1/8 x 1) (18 Ft.) (Sold Per Foot)	AR
38	01-1M6199-00002	Door Assy. (Incls. Items 1 thru 29, 31, 35, 36, & 37)	1
39	01-1M6108-00001	Latch Assy. (Mechanism)	1
40	01-1M7343-00001	Handle - Interior Door	1
41	01-100V16-00765	Glass - Double Pane Curved	1
42	00-913135-00228	Plug - Snap In (Round)	2
43	01-1M6103-0203B	Cap - End (Door Handle) (Oval)	AR
44	01-1M6526-00001	Bracket - Actuator, Door Switch	1
45	00-913135-00228	Plug - Snap In (Round)	2
46	01-1M6103-0203B	Cap - End (Door Handle) (Oval)	2

* (Kit includes quantity for one entire oven.)

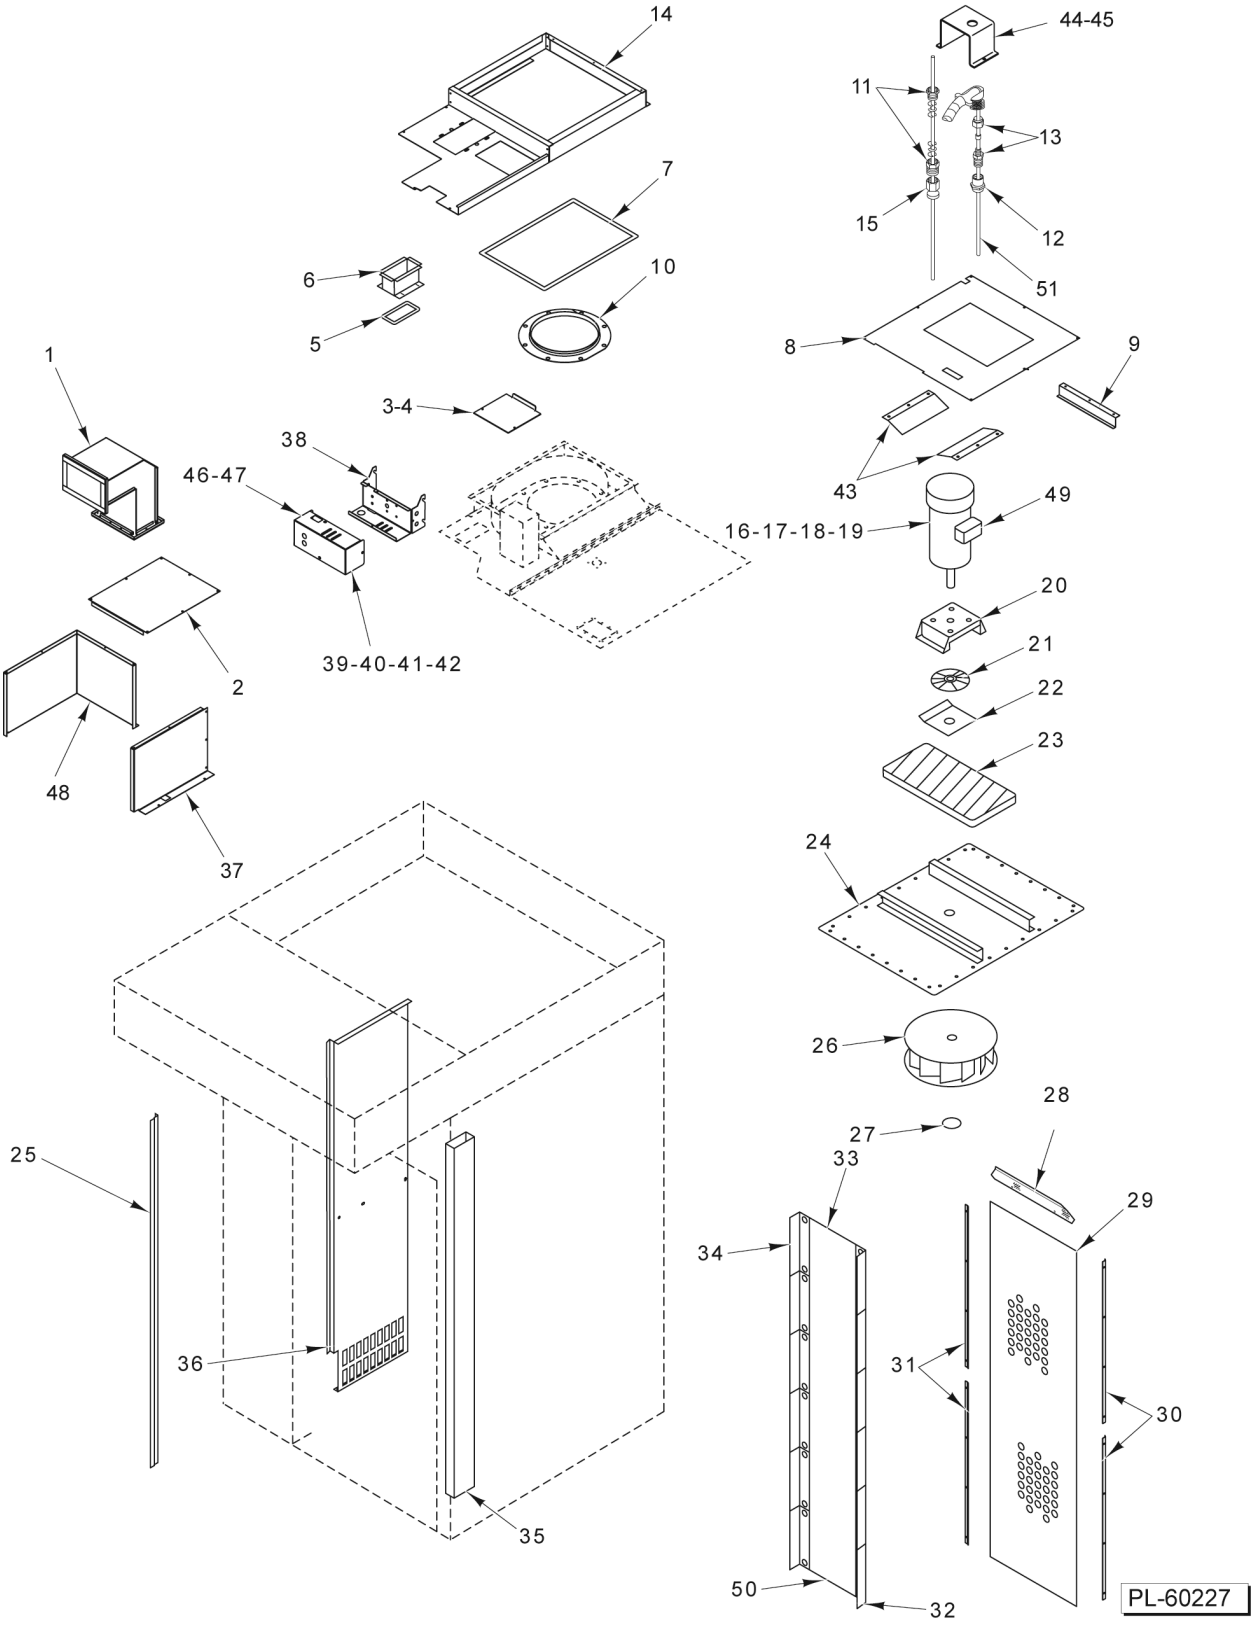


BLOWER, PANELS, AND VENTS
(SINGLE RACK) (ML-132521)

BLOWER, PANELS, AND VENTS (SINGLE RACK) (ML-132521)

ILLUS. PL-60227	PART NO.	NAME OF PART	AMT.
1	01-1M6170-00001	Duct - Vent	1
2	01-1M2224-00001	Duct - Top	1
3	01-100V16-00682	Gasket - Vent Duct	1
4	01-1M6549-00001	Vent - Intake Lid	1
*5	01-100V21-00072	Rope - Glass (3/4 Dia.)	AR
6	01-1M5462-00001	Weldment - Rope Gasket	1
*7	01-100V21-0065A	Tape - Fiberglass (1/8 x 1)	AR
8	01-1M5542-00001	Cover - Blower Insulation	1
9	01-1M2227-00001	Liner - Blower Insulation Cover	2
10	01-1M2451-00001	Bell - Inlet	1
11	01-100V17-00304	Kit - Stuffing Box	1
12	01-100V17-00257	Coupling 1/4 NPT (Brass)	1
13	01-100V17-00279	Fitting 1/4 x 3/16	1
14	01-1M6141-00001	Body - Insulation Blower Cover (LH)	1
15	01-100V17-00281	Coupler - Reducer 3/8 to 1/4	1
16	01-1M2060-00002	Blower Assy. (3 Ph.) (Incls. Items 18, 20 thru 24, 26, & 27)	1
17	01-1M2060-00004	Blower Assy. (1 Ph.) (Incls. Items 19 thru 24, 26, & 27)	1
18	01-1000V8-00052	Motor - Blower (3 Ph., 1-1/2 Hp.)	1
19	01-1000V8-00067	Motor - Blower (1 Ph., 2 Hp.)	1
20	01-1M1360-00001	Mount - Blower Motor	1
21	01-1M2458-00001	Heat Slinger Assy	1
22	01-1M1794-00001	Cover - Blower Insulation	1
23	01-1M1795-00001	Insulation - Blower	1
24	01-1M2059-00001	Weldment - Blower Mount	1
25	01-1M5476-00001	Bracket - Mounting (Suction Panel)	1
26	01-1000V8-00041	Wheel - Blower (15 In. Dia.)	1
27	01-1000V1-00028	Ring - Snap	1
28	01-1M2101-00004	Z-Bar (Pressure Panel)	1
29	01-1M2572-00001	Screen - Pressure Panel	1
30	01-1M2479-00002	Retainer - Pressure Screen (RH)	2
31	01-1M2479-00003	Retainer - Pressure Screen (LH)	2
32	01-1M5459-00002	Shutter - Pressure Panel 97 Deg	6
33	01-1M5523-00001	Body - Pressure Panel Shutter Support	1
34	01-1M5459-00001	Shutter - Pressure Panel 90 Deg. (#2 Bend At 7 Deg.)	6
35	01-1M2089-00001	Duct - Bottom Vent	1
36	01-1M5473-00001	Panel - Suction	1
37	01-1M2222-00001	Duct - Side	1
38	01-1M6551-00101	Bracket - Mounting (Vent)	1
39	01-1M6551-00001	Vent - Motor Actuator - Assy. (Incls. Items 40, 41, & 42)	1
40	01-1M6551-00102	Bracket - Vent Cover	1
41	01-1M6552-00001	Vent Switch Assy	1
42	01-1000V8-00109	Motor - Vent Gear	1
43	01-1M1895-00001	Cover - Blower Insulation	2
44	01-1M1433-00001	Protector - Thermocouple	1
45	01-1M5515-00001	Thermocouple Assy. - Conduit & Thermocouple	1
46	01-1M5827-0001A	Kit - Vent Switch Replacement	1
47	01-1M5827-00101	Bracket - Vent Switch	1
48	01-1M2223-00001	Duct - Body	1
49	01-1000V6-00233	Contactor - Blower	1
50	01-1M5458-00001	Panel - Pressure Shutter Assy. (Incls. Items 32, 33, & 34)	1
51	01-1A1828-00001	Kit - Thermocouple	1


* (Sold Per Inch)

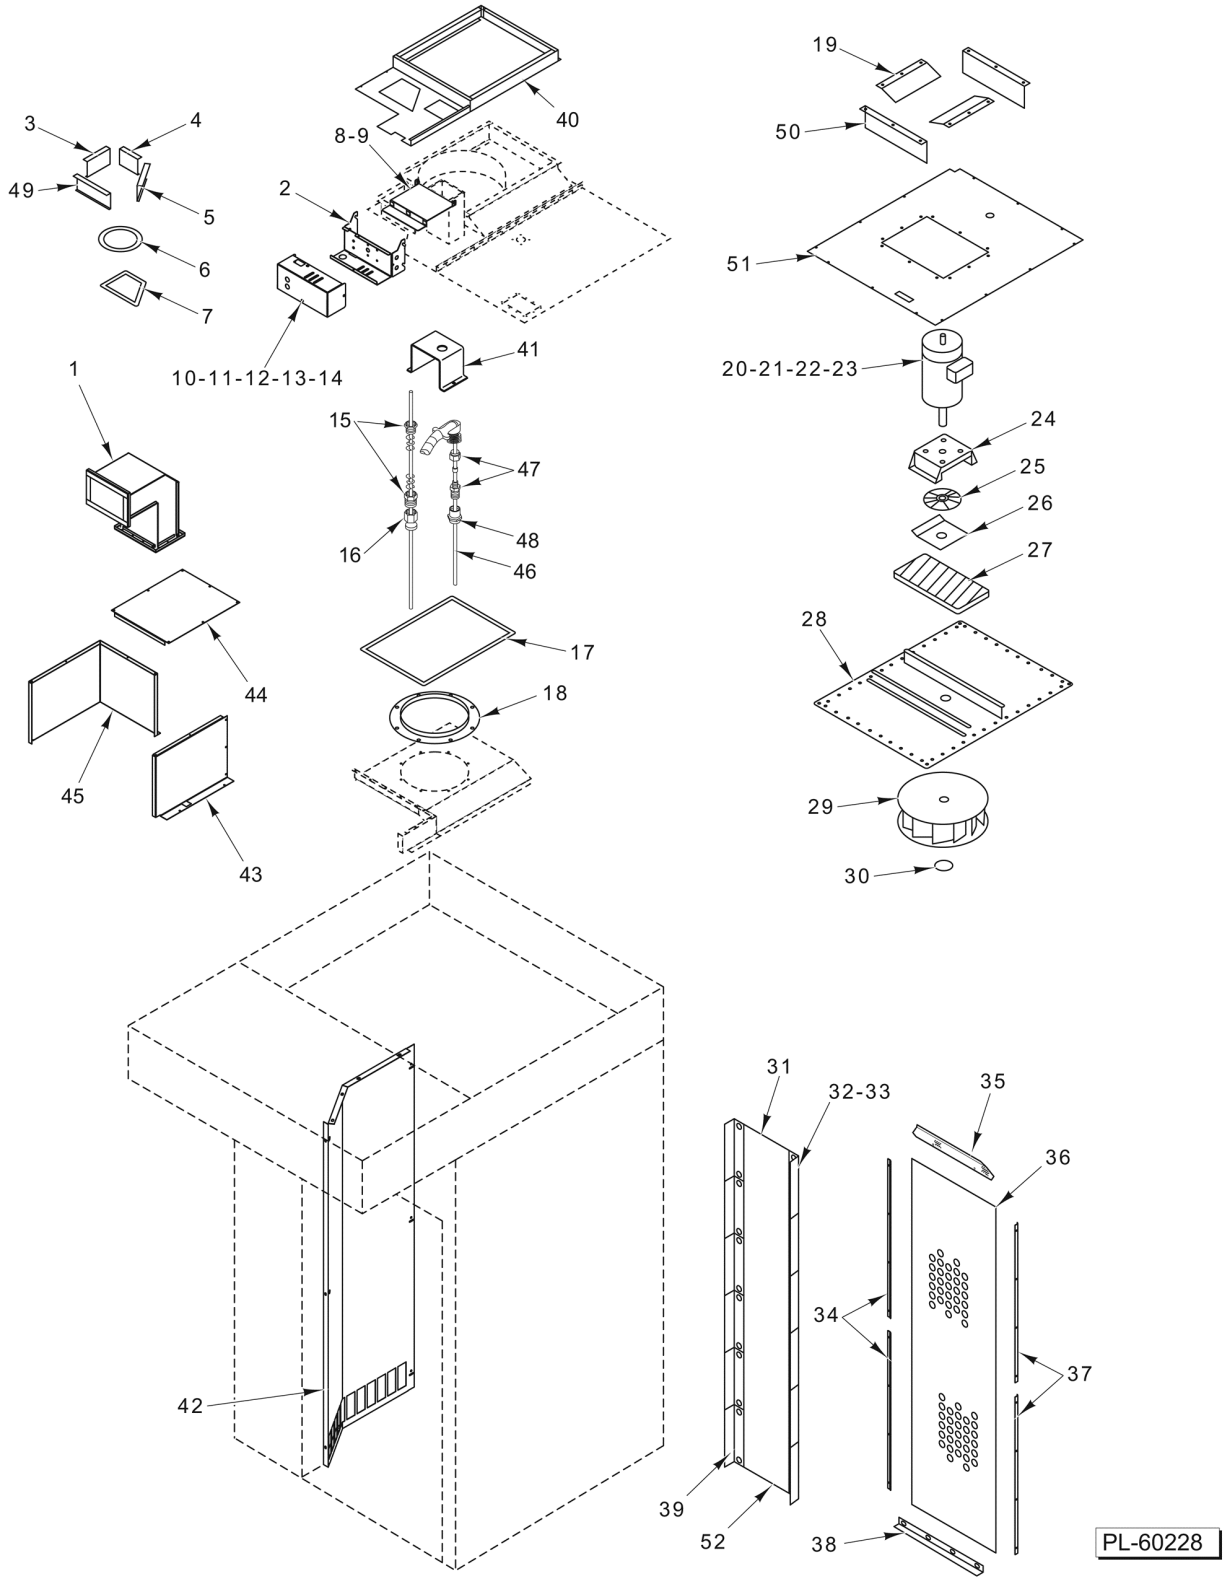

BLOWER, PANELS, AND VENTS
(DOUBLE RACK) (ML-132523)

BLOWER, PANELS, AND VENTS (DOUBLE RACK) (ML-132523)

ILLUS. PL-60228	PART NO.	NAME OF PART	AMT.
1	01-1M6170-00001	Duct - Vent	1
2	01-1M6551-00101	Bracket - Mounting (Vent)	1
3	01-1M5015-00004	Retainer - Exhaust Stack Packing	1
4	01-1M5015-00003	Retainer - Exhaust Stack Packing	1
5	01-1M5015-00002	Retainer - Exhaust Stack Packing	1
6	01-100V21-00072	Rope - Glass (3/4 Dia.) (Sold Per Inch)	AR
7	01-1M5982-00204	Collector (Top Gap Filler)	1
8	01-1M6549-00001	Vent - Intake Lid	1
9	01-100V16-00682	Gasket - Vent Duct	1
10	01-1M6551-00001	Vent - Motor Actuator - Assy. (Incls. Items 11 thru 14)	1
11	01-1M6551-00102	Bracket - Vent Cover	1
12	01-1M6552-00001	Vent Switch Assy	1
13	01-1000V8-00109	Motor - Vent Gear	1
14	01-1M6553-00001	Cam - Vent Switch	1
15	01-100V17-00304	Kit - Stuffing Box	1
16	01-100V17-00281	Coupler - Reducer 3/8 to 1/4	1
17	01-100V16-00682	Gasket - Vent Duct (Sold Per Inch)	AR
18	01-1M2451-00002	Bell - Inlet	1
19	01-1M1895-00001	Cover - Blower Insulation	2
20	01-1M5025-00001	Blower Assy. (3 Ph.) (Incls. Items 22 & 24 thru 30)	1
21	01-1M5025-00002	Blower Assy. (1 Ph.) (Incls. Items 23 & 24 thru 30)	1
22	01-1000V8-00052	Motor - Blower (3 Ph., 1-1/2 Hp.)	1
23	01-1000V8-00067	Motor - Blower (1 Ph., 2 Hp.)	1
24	01-1M1360-00001	Mount - Blower Motor	1
25	01-1M2458-00001	Heat Slinger Assy	1
26	01-1M1794-00001	Cover - Blower Insulation	1
27	01-1M1795-00001	Insulation - Blower	1
28	01-1M5026-00001	Weldment - Blower Mount	1
29	01-1000V8-00058	Wheel - Blower (18 In. Dia.)	1
30	01-1000V1-00028	Ring - Snap	1
31	01-1M2096-00002	Body - Pressure Panel Shutter Support	1
32	01-1M5459-00002	Shutter - Pressure Panel 97 Deg	6
33	01-1000V4-00020	Insert - Threaded 1/4-20	24
34	01-1M5686-00206	Retainer - Pressure Panel	2
35	01-1M5686-00207	Retainer - Pressure Panel Top	1
36	01-1M2572-00001	Screen - Pressure Panel	1
37	01-1M5686-00206	Retainer - Pressure Panel	2
38	01-1M5686-00205	Retainer - Pressure Panel	1
39	01-1M5459-00001	Shutter - Pressure Panel 90 Deg	6
40	01-1M6141-00002	Body - Insulation Blower Cover Double (LH)	1
41	01-1M1433-00001	Protector - Thermocouple	1
42	01-1M6063-00002	Panel - Suction	1
43	01-1M2222-00001	Side - Duct Insulation Cover	1
44	01-1M2224-00001	Top - Duct Insulation Cover	1
45	01-1M2223-00001	Body - Duct Insulation Cover	1
46	01-1A1828-00001	Kit - Thermocouple	1
47	01-100V17-00279	Fitting 1/4 x 3/16	1
48	01-100V17-00257	Coupling 1/4 NPT (Brass)	1
49	01-1M5015-00001	Retainer - Exhaust Stack Packing, Front	1
50	01-1M2227-00001	Liner - Blower Insulation Cover	2
51	01-1M6154-00201	Cover - Blower Insulation	1
52	01-1M5177-00001	Pressure Panel Assy. (Incls. Items 31, 32, 33, & 39)	1

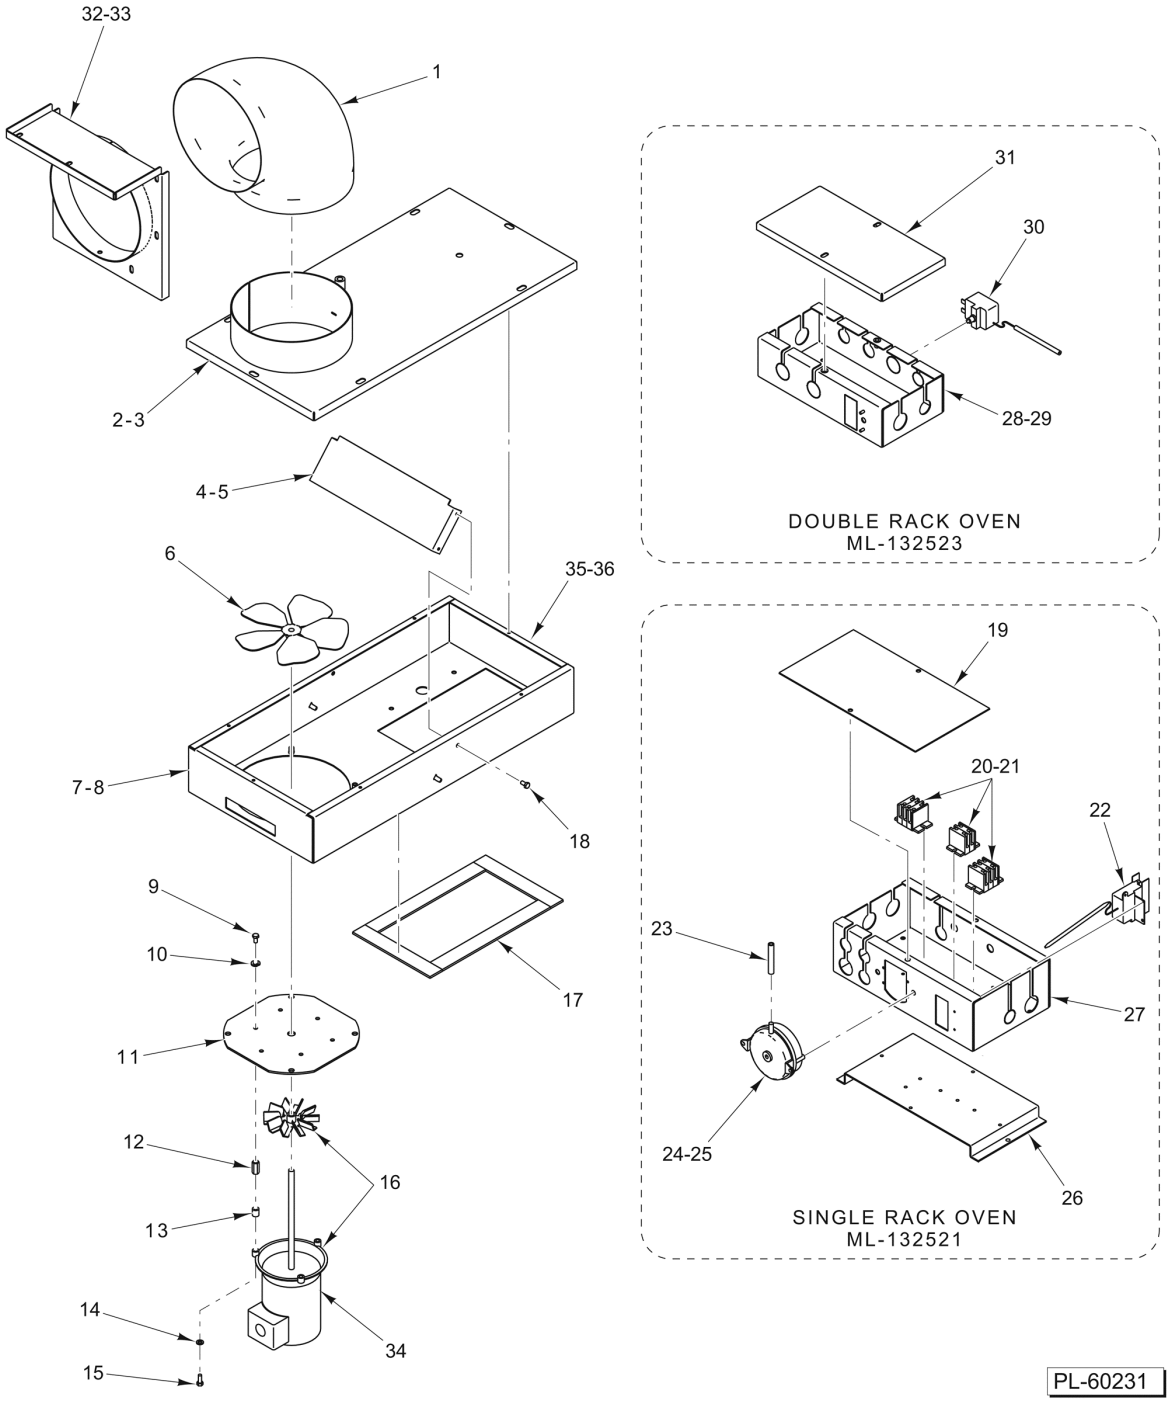


DRAFT INDUCER

DRAFT INDUCER

ILLUS. PL-60231	PART NO.	NAME OF PART	AMT.
1	01-1000V9-00172	Elbow (7 In., 26 Ga.) (90 Deg.)	1
2	01-1M5656-00001	Cover Assy. - Draft Inducer (ML-132521)	1
3	01-1M5656-00002	Cover Assy. - Draft Inducer (ML-132523)	1
4	01-1M5657-00001	Damper - Draft Inducer (ML-132521)	1
5	01-1M5657-00002	Damper - Draft Inducer (ML-132523)	1
6	01-1000V8-00121	Blade - Fan	1
7	01-1M5655-00001	Box - Draft Inducer (ML-132521)	1
8	01-1M5655-00002	Box - Draft Inducer (ML-132523)	1
9		Mach. Screw 10-32 x 3/8 Hex Hd. (SST)	AR
10		Lockwasher #10	AR
11	01-1M5653-00001	Plate - Draft Inducer Fan Mounting	1
12	01-1M3001-00003	Spacer - PC Board	AR
13	01-1000V5-00220	Bushing - Spacer	3
14		Lockwasher #10	AR
15		Mach. Screw 10-32 x 1 Hex Hd. (SST)	AR
16	01-1000V8-00133	Motor - Fan (3000 RPM)	1
*17	01-100V21-0065	Tape - Woven Fiber (ML-132521)	AR
18		Mach. Screw 10-32 x 5/8 Hex Hd. (SST)	AR
19	01-1M5443-00001	Cover - Junction Box (ML-132521)	1
20	01-1000V5-00105	(ML-132521)	AR
21	01-1000V6-00106	End -Section (ML-132521)	AR
22	01-1000V6-00290	Thermostat - High Limit (608 Deg.) (ML-132521)	1
23	01-100V17-00606	Tube (Norprene) (ML-132521)	1
24	01-1M5973-00001	Switch - Pressure (180 kBTU, 60 Hz.) (300 kBTU, 60 Hz.) (ML-132521)	1
25	01-1M5651-00022	Switch - Pressure (300 kBTU, 50 Hz.) (350 kBTU, 60 Hz.) (ML-132521)	1
26	01-1M5441-00001	Panel - Junction Box (ML-132521)	1
27	01-1M5442-00002	Junction Box - Frame (ML-132521)	1
28	01-1M5684-00001	Junction Box (Frame) (ML-132523)	1
29	01-1M5525-00001	Box - Junction (ML-132523)	1
30	01-1000V6-00290	Thermostat - High Limit (608 Deg.) (ML-132523)	1
31	01-1M5525-00106	Cover - Junction Box (ML-132523)	1
32	01-1M5925-00001	Hood Connection - Draft Inducer (ML-132521)	1
33	01-1M5925-00002	Hood Connection - Draft Inducer (ML-132523)	1
34	01-1M5652-00002	Motor Assy. - Draft Inducer (Incls. Items 6, 11, 12, 13, & 16)	1
35	01-1M5654-00001	Draft Inducer Assy. (Incls. Items 2, 4, 6, 7, & 9 thru 18) (ML-132521)	1
36	01-1M5654-00002	Draft Inducer Assy. (Incls. Items 3, 5, 6, 8, & 8 thru 19) (ML-132523)	1


* (Sold Per Foot)

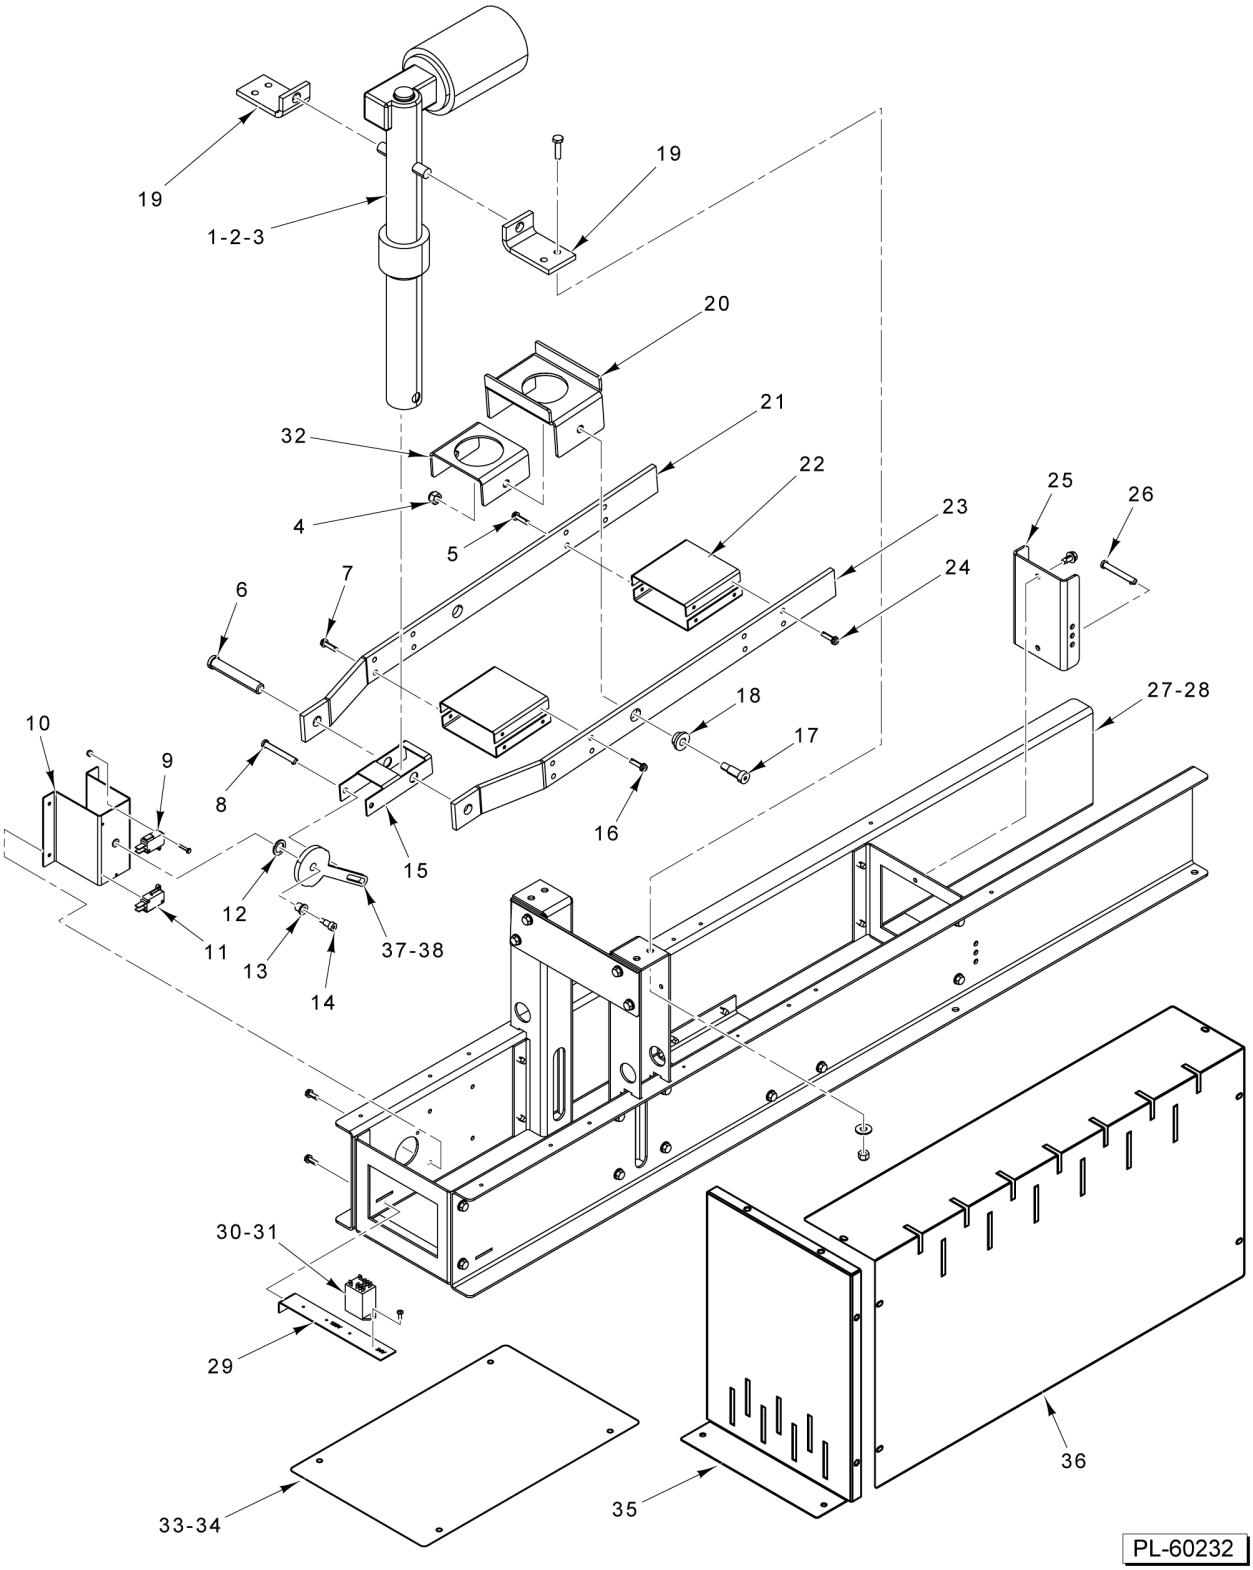
19
19
1-2-3
20
21
32
22
4
5
23
25
26
24
6
7
18
27-28
10
9
17
8
16
15
12
11
37-38
13
14
30-31
29
36
35
33-34
PL-60232

LIFTER

LIFTER

ILLUS. PL-60232	PART NO.	NAME OF PART	AMT.
1	01-1M6630-00002	Harness - Rack Lift	1
2	01-1M6762-00001	Actuator - Linear (With Plug) 3200 RPM	1
3	01-1000V8-0158C	Capacitor - 30uF / 300Vac (Type 1 Heavy Duty)	1
4	01-1000V4-00380	Nut 5/16-18 NYLOCK	2
5		Screw 10-32	4
6	01-1000V1-00086	Pin - Clevis (1/2 x 3 In.)	1
7		Screw 10-32	4
8	01-1000V1-00087	Pin - Clevis (1/4 x 2 In.)	1
9	01-1000V6-00343	Switch - Lever SPST	1
10	01-1M6603-00001	Bracket Assy. - Switch	1
11	01-1000V6-00343	Switch - Lever SPST	1
12	01-1000V0-00120	Bearing - Thrust	1
13	01-1000V0-00119	Bearing - Flange (Bronze)	1
14	01-1000V4-00321	Shoulder Screw 10-32 x 1/4 (1/2 Shoulder)	1
15	01-1M6600-00204	Arm - Lift Switch Actuating	1
16		Screw 10-32	4
17	01-1000V4-00379	Bolt - Shoulder	2
18	01-1000V0-00121	Bearing	2
19	01-1M6600-00202	Bracket - Mounting (Linear Actuator)	2
20	01-1M6601-00103	Support - Rotator	1
21	01-1M6601-00101	Arm - Lifting	1
22	01-1M6601-00102	Brace - Lifting Arm	4
23	01-1M6601-00101	Arm - Lifting	1
24		Screw 10-32	4
25	01-1M6600-00203	Bracket - Support	1
26	01-1000V1-00087	Pin - Clevis (1/4 x 2 In.)	2
27	01-1M6599-00001	Lifter Body Assy. (ML-132521)	1
28	01-1M6599-00002	Lifter Body Assy. (ML-132523)	1
29	01-1M6600-00104	Bracket - Relay	1
30	01-1000V6-00271	Relay - D.P.D.T. (1/2 Hp., 120 VAC)	1
31	01-1000V6-00297	Relay - DPDT 1/2 HP. (24V Coil)	1
32	01-1M6601-00104	Support - Rotator	1
33	01-1M6608-00004	Cover - Front (ML-132523)	1
34	01-1M6608-00003	Cover - Front (ML-132521)	1
35	01-1M6608-00001	Cover - Front/Back	2
36	01-1M6608-00002	Cover - Side	2
37	01-1M6600-00205	Cam - Lift Switch	1
38	01-1M6600-00605	Cam - Lift Switch (A Style Carrier) (V-Notch Up)	1

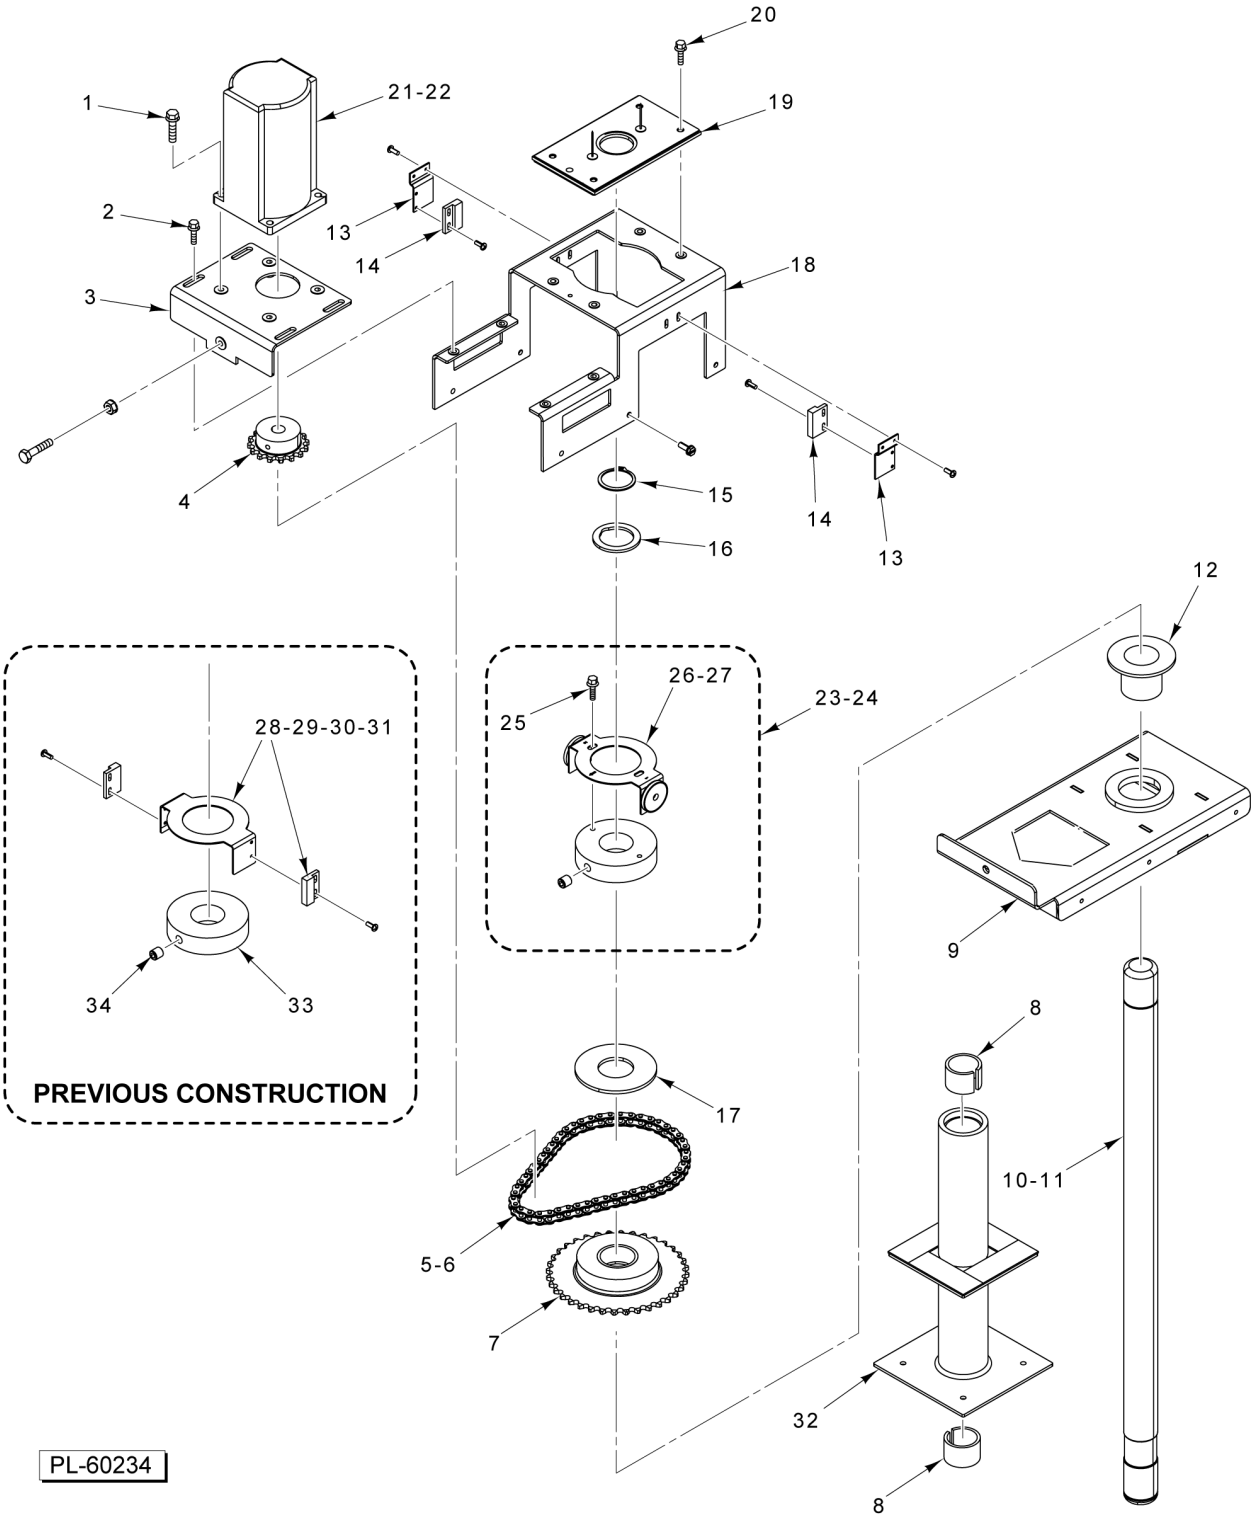

20
1
21-22
19
2
13
14
18
3
4
15
16
14
13
12
26-27
25
23-24
28-29-30-31
9
34
33
8
17
10-11
5-6
7
32
8
PREVIOUS CONSTRUCTION
PL-60234

ROTATOR

ROTATOR

ILLUS. PL-60234	PART NO.	NAME OF PART	AMT.
1	01-1000V4-00382	Screw 1/4-20 x 1/2 Hex Washer Hd. (SST)	4
2	01-1000V4-00284	Screw 10-32 x 3/4 Hex Washer Hd., Serrated Flange (SST)	4
3	01-1M6607-00001	Bracket - Motor Mounting	1
4	01-1000V3-00105	Sprocket (17T)	1
5	01-1000V3-0087A	Chain - Roller 20-1/8 In	1
6	01-1000V3-00088	Link - Connecting	AR
7	01-1M6610-00001	Sprocket - Rotator	1
8	01-1M7464-00001	Kit - Bearing (Shaft Housing)	2
9	01-1M6605-00001	Rotator - Lifter	1
10	01-1M6604-00105	Shaft - Rotator (B Style)	1
11	01-1M6604-00305	Shaft - Rotator (C Style)	1
12	01-1000V0-00114	Bearing - Flange	1
13	01-1M6604-00106	Bracket - Rotate Switch	2
14	01-1M5777-00101	Switch (Magnetic)	2
15	01-1000V1-00085	Snap Ring	1
16	01-1M6704-00001	Shim - Carrier	1
17	01-1M6604-00104	Clutch - Slide	1
18	01-1M6604-00201	Bracket - Mounting	1
19	01-1M6606-00002	Shaft Alignment Assy	1
20	01-1000V4-00284	Screw 10-32 x 3/4 Hex Washer Hd., Serrated Flange (SST)	4
21	01-1M6866-00001	Motor (120 V., 60 Hz.)	1
22	01-1000V8-0157C	Capacitor	1
*23	01-1M6629-00003	Magnet Switch Assy. (One Magnet) (A Style) (Incls. Items 25 & 26)	1
*24	01-1M6629-00004	Magnet Switch Assy. (Two Magnets) (B & C Style) (Incls. Items 25 & 27)	1
25	01-1000V4-00284	Screw 10-32 x 3/4 Hex Washer Hd., Serrated Flange (SST)	2
26	01-1M6880-00003	Pointer Assy. (One Magnet) (A Style)	1
27	01-1M6880-00004	Pointer Assy. (Two Magnets) (B & C Style)	1
**28	01-1M6916-00001	Kit - Magnet Replacement (One Magnet) (A Style Double Rack) (C Style Single Rack)	1
**29	01-1M6916-00002	Kit - Magnet Replacement (Two Magnets) (B Style) (C Style Double Rack)	1
***30	01-1M6880-00001	Pointer Assy. (Incls. Tape) (One Magnet) (A Style Double Rack) (C Style Single Rack)	1
***31	01-1M6880-00002	Pointer Assy. (Incls. Tape) (Two Magnets) (B Style) (C Style Double Rack)	1
32	01-1M6662-00001	Housing - Shaft (Incls. Bearing)	1
33	01-1M6604-00103	Collar, Set - Rotator	1
34	01-1000V4-00161	Screw, Set - Allen (3/8-16)	1


* (Used on Machines Built After 11/6/13)
** (Used on Machines Built Before 9/15/13)
*** (Used on Machines Built After 9/15/13 and Before 11/6/13)

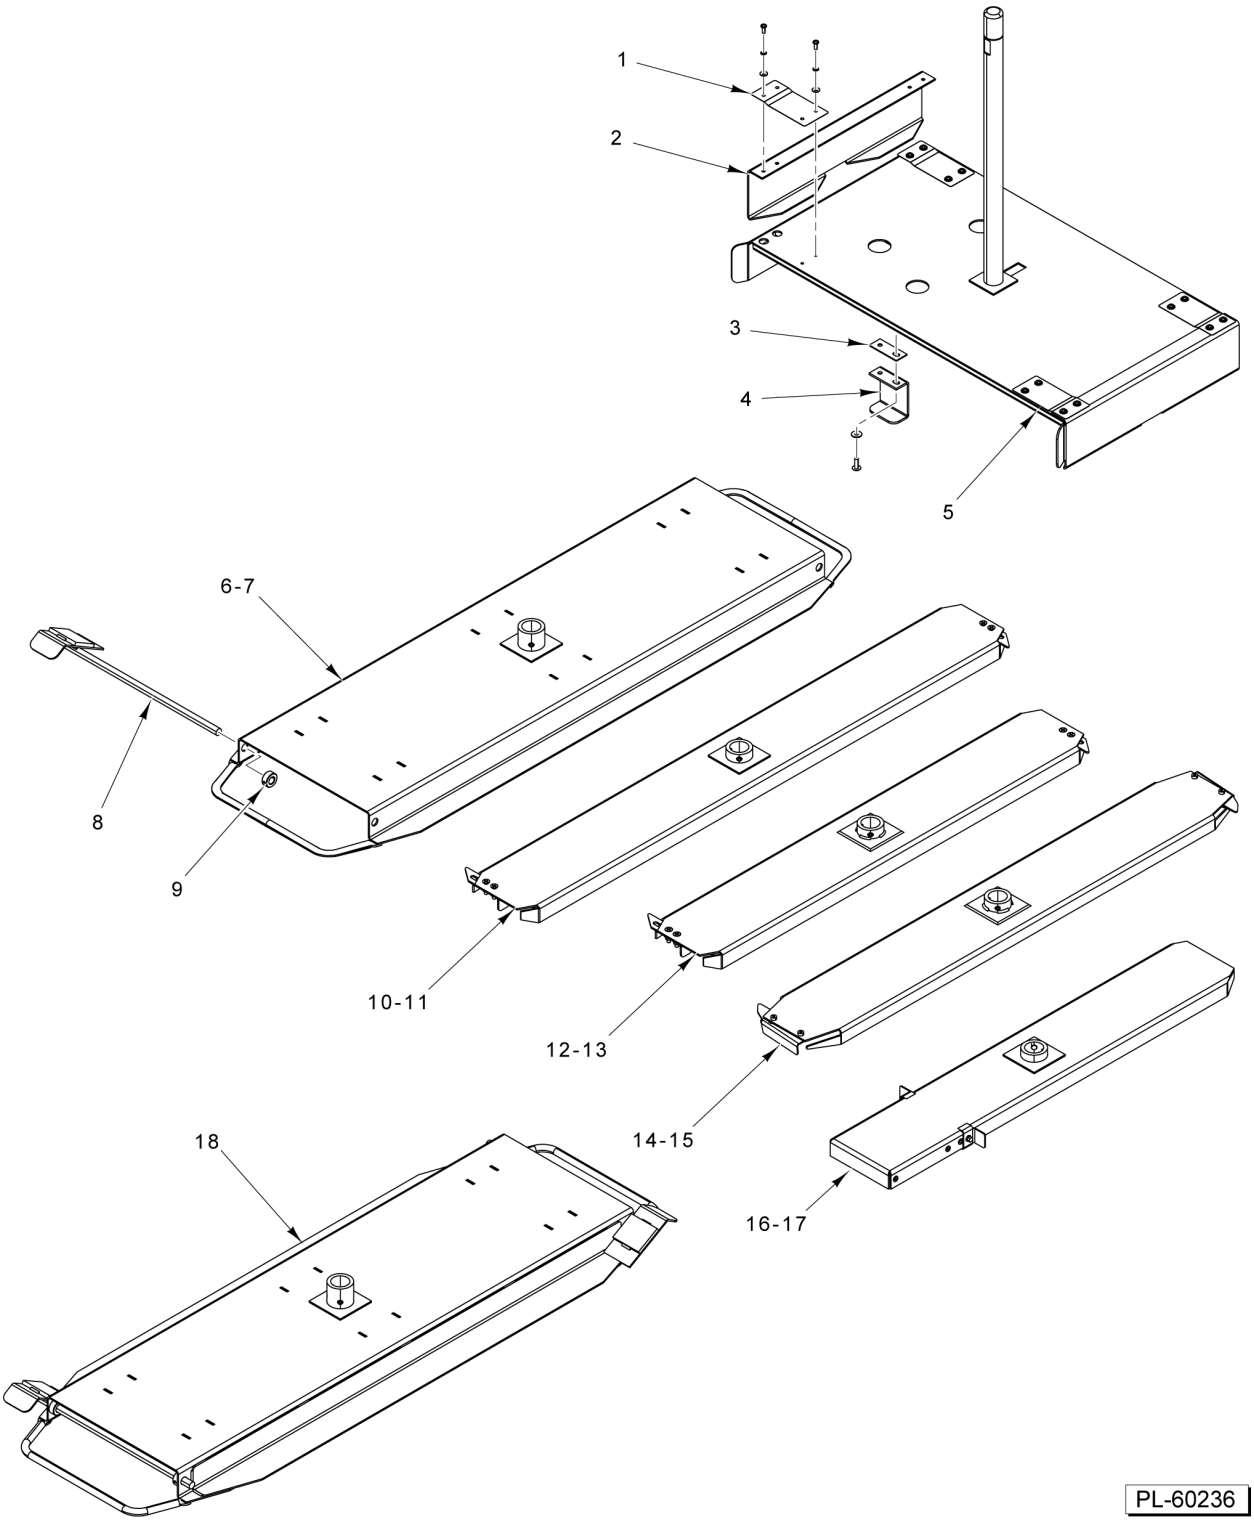

CARRIER

CARRIER


ILLUS. PL-60236	PART NO.	NAME OF PART	AMT.
1	01-1M5367-00001	Strap - Side Support	4
2	01-1M5368-00001	Channel - Side Hanger	2
3	01-1M5369-00002	Shim - Support	2
4	01-1M5366-00001	Channel - Support Hanger	2
5	01-1M6772-00001	Carrier (A Style) (Double Rack) (Incls. Items 1 thru 54	1
6	01-1M6622-00002	Carrier (B Style) (Double Rack) (Incls. Items 8 & 9) (ML-132523)	1
7	01-1M6622-00001	Carrier (B Style) (Single Rack) (Incls. Items 8 & 9) (ML-132521)	1
8	01-1M2580-00002	Stop - Rack Carrier (B Style Carrier)	2
9	01-1000V1-00013	Collar - Set 1/2 In. Dia	4
10	01-1M6770-00003	Carrier (C Style) (42-1/2 In. Stops) (Incls. Item 11) (ML-132523)	1
11	01-1M4862-00101	Latch - Carrier (ML-132523)	2
12	01-1M6770-00004	Carrier (C Style) (33 In. Stops) (Incls. Item 13) (ML-132523)	1
13	01-1M4862-00101	Latch - Carrier (ML-132523)	2
14	01-1M6770-00007	Carrier (C Style) (Panera) (Incls. Item 15) (ML-132523)	1
15	01-1M4862-00701	Lock - Carrier (Double Models Only) (Panera Bread Only) (ML-132523)	2
16	01-1M6770-00005	Carrier (C Style) (Single Rack) (Incls. Items 17) (ML-132521)	1
17	01-1M4862-00201	Stop - Rack Carrier (C Style Carrier) (ML-132521)	2
18	01-1M6622-00004	Carrier (B Style W/Welded Extensions) (16.875 In. Wide) (Incls. Items 8 & 9)	1

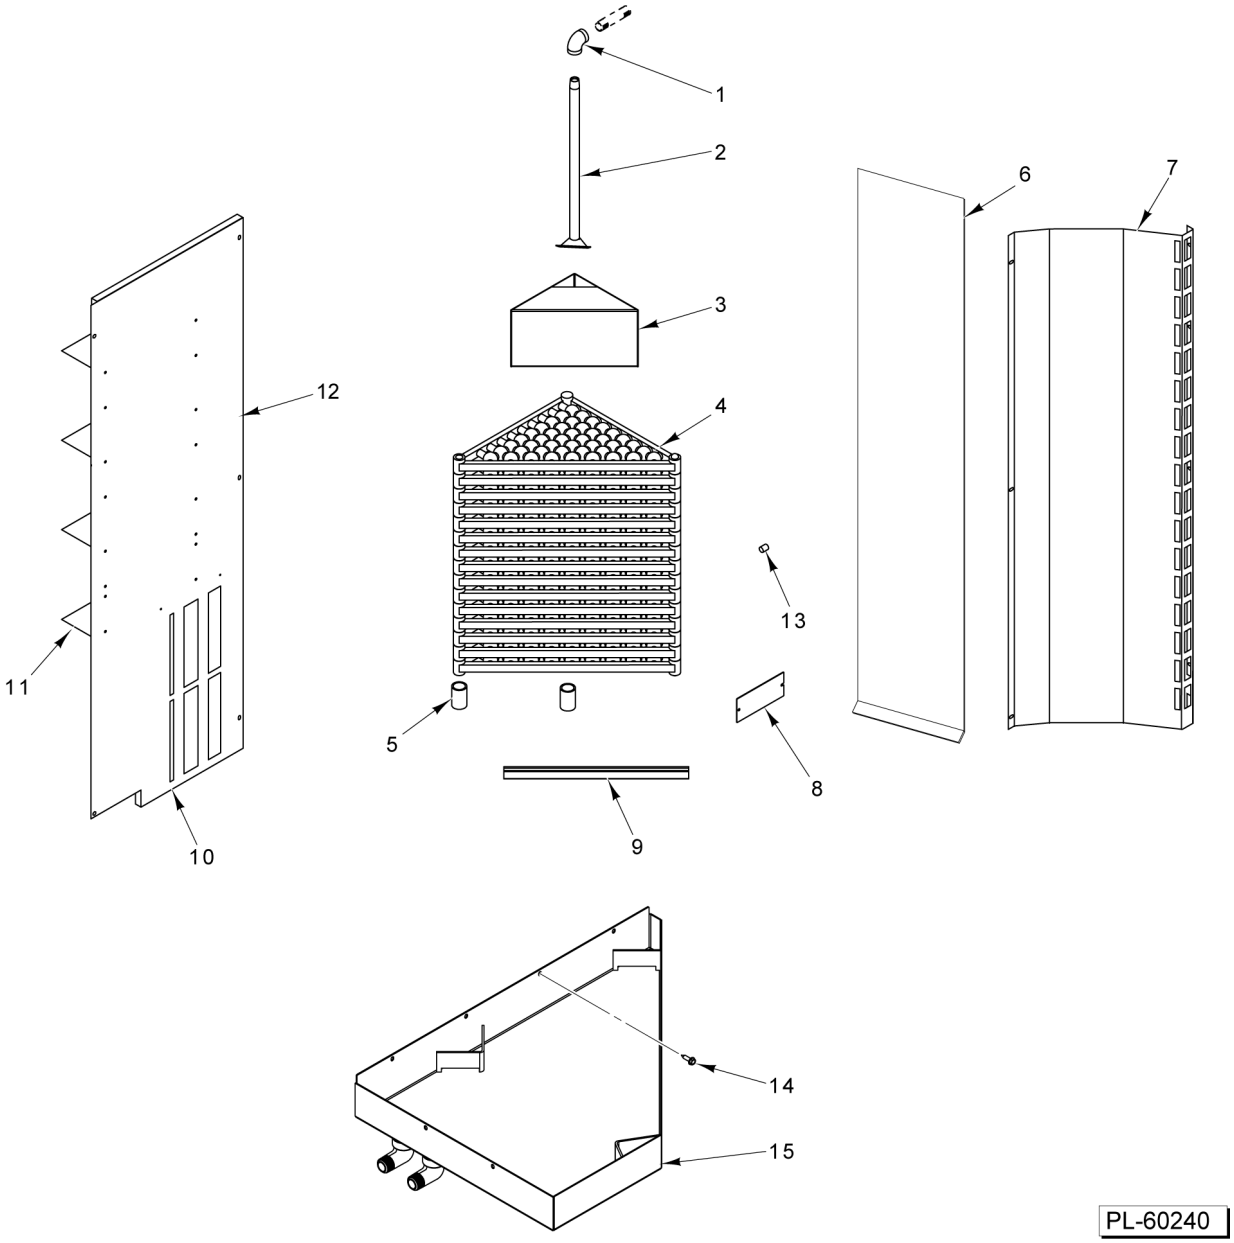

STEAMER ASSEMBLY
(SINGLE RACK) (ML-132521)

STEAMER ASSEMBLY
(SINGLE RACK) (ML-132521)


ILLUS. PL-60240	PART NO.	NAME OF PART	AMT.
1	01-100V17-00347	Elbow 1/2 In. x 90 Deg.	1
2	01-1M5146-00101	Manifold - Steamer Weldment	1
3	01-1M5198-00001	Box Weldment - Steamer	1
4	01-100V16-00529	Casting - Steamer	15
5	01-1M5536-00001	Support - Steamer Castings	2
6	01-1M6325-00001	Sheet - Splash	1
7	01-1M5474-00001	Panel - Steamer	1
8	01-1M5446-00002	Plate - Steam Loader Bolt Cover	1
9	01-1M5065-00001	Bracket - Water Guide	7
10	01-1M5471-00001	Panel - Rear Steamer	1
11	01-1M5470-00001	Baffle	4
12	01-1M5469-00001	Panel Assy. - Heat Exchanger Wall (Incls Items 10 & 11)	1
13	01-1M2161-00001	Screw - Leveler	1
14	01-1000V4-00009	Screw - Sheet Metal Hex Hd	AR
15	01-1M5429-00001	Pan - Drain	1

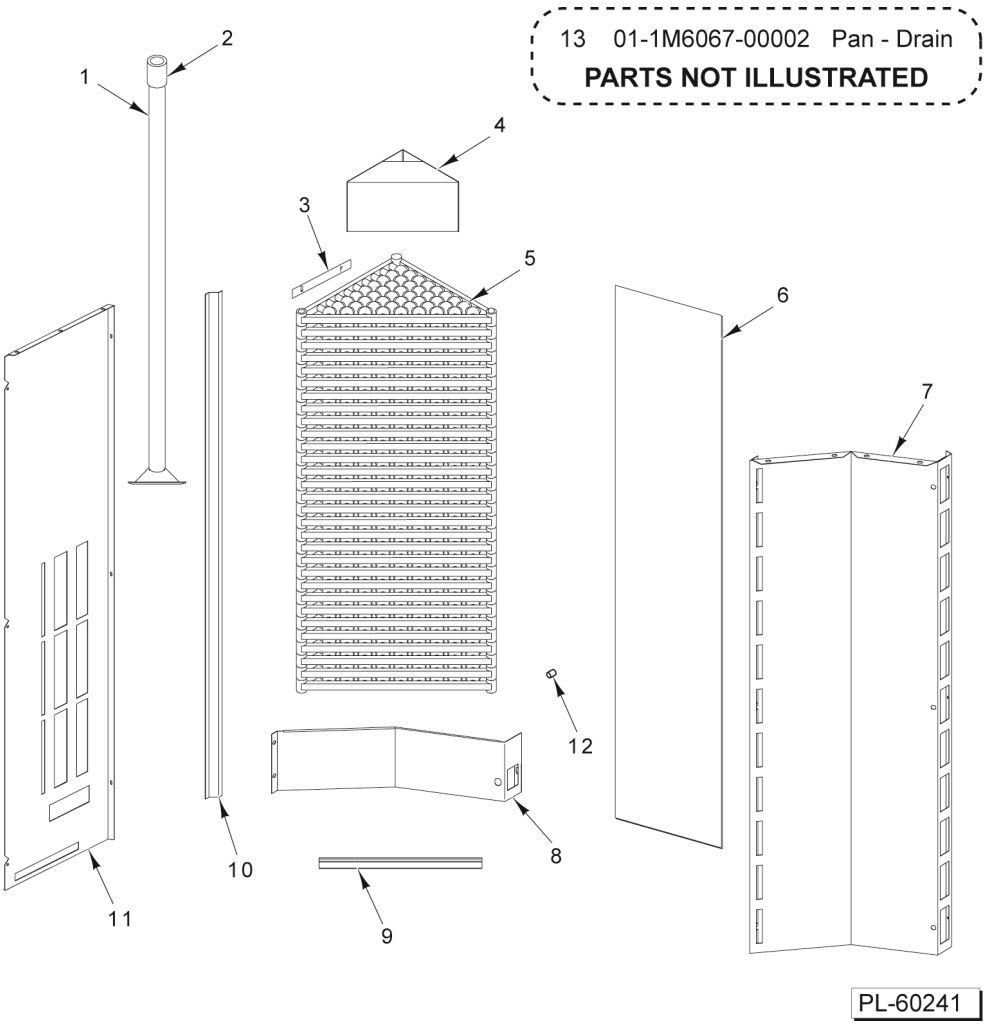

STEAMER ASSEMBLY
(DOUBLE RACK) (ML-132523)

STEAMER ASSEMBLY
(DOUBLE RACK) (ML-132523)

ILLUS. PL-60241	PART NO.	NAME OF PART	AMT.
1	01-1M5146-00001	Manifold Assy. - Steamer	1
2	01-100V17-00183	Coupler 1/2 In. (SST)	1
3	01-1M5171-00001	Angle - Shutter Casting (Top Section)	1
4	01-1M5198-00001	Box Weldment - Steamer	1
5	01-100V16-00529	Casting - Steamer	30
6	01-1M6325-00002	Sheet - Splash	1
7	01-1M6065-00002	Panel - Steamer Outer	1
8	01-1M6066-00002	Panel - Steamer Pan	1
9	01-1M5065-00001	Bracket - Water Guide	7
10	01-1M5939-00002	Angle - Shutter Casting	1
11	01-1M6064-00002	Panel - Streamer (Rear)	1
12	01-1M2161-00001	Screw - Leveler	1
13	01-1M6067-00002	Pan - Drain	1

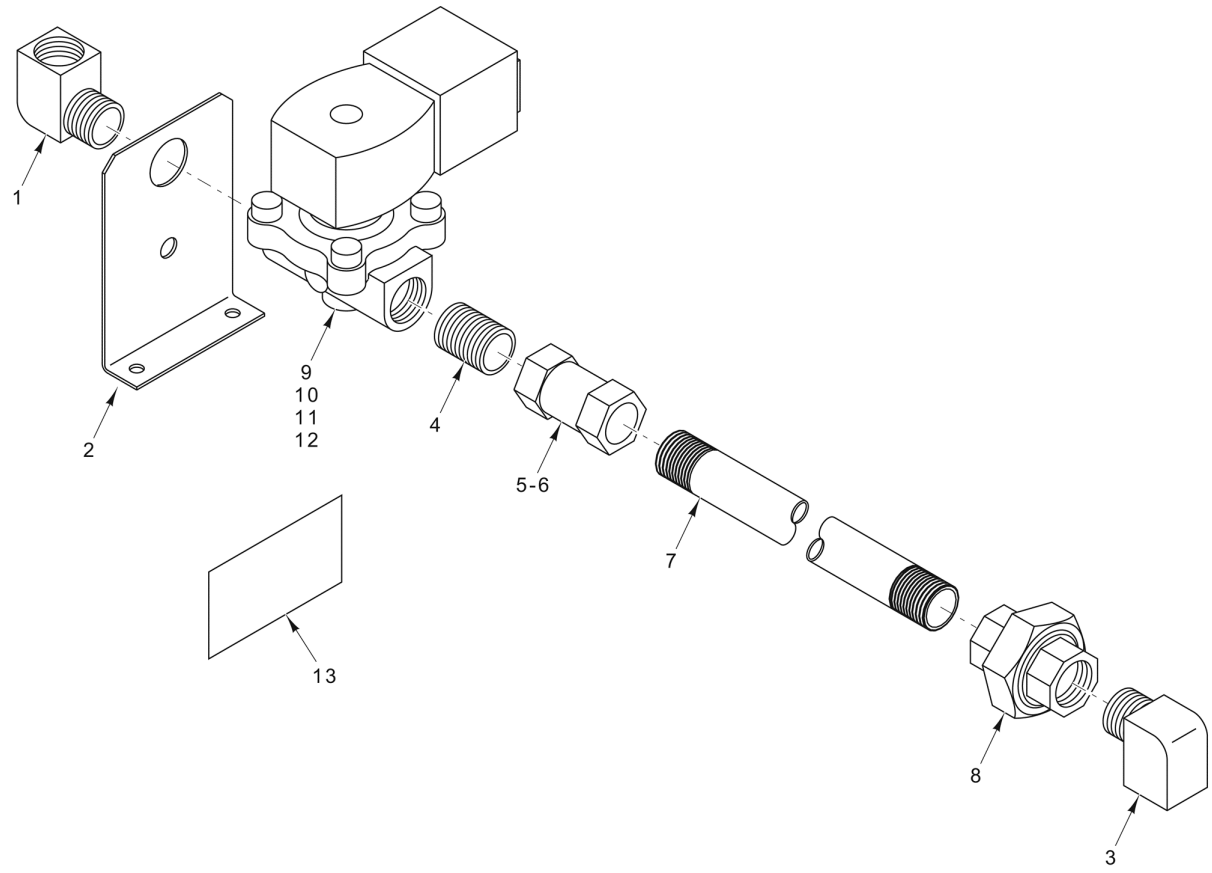


PL-60245

EXTERIOR WATER SUPPLY

EXTERIOR WATER SUPPLY


ILLUS. PL-60245	PART NO.	NAME OF PART	AMT.
1	01-100V17-00322	Ell 1/2 Street (Brass)	1
2	01-1M5818-00101	Bracket - Water Supply Support (ML-132523)	1
3	01-100V17-00322	Ell 1/2 Street (Brass)	1
4	01-100V17-00288	Pipe 1/2 Dia. Close (Brass)	1
5	01-100V17-00567	Regulator - Flow 1/2 NPTF (2 G.P.M.) (ML-132521)	1
6	01-100V17-00568	Regulator - Flow 1/2 NPTF (3 G.P.M.) (ML-132523)	1
7	01-100V17-00570	Nipple 1/2 In. Dia. x 6 In. (Brass)	1
8	01-100V17-00286	Union 1/2 NPTF (Brass)	1
9	01-100V17-00274	Valve - Solenoid Water (2-Way) (120 V.)	1
10	01-1M5818-00001	Water Supply (2 G.P.M.) (Single Rack Ovens) (ML-132521) (Incls. Items 1 thru 5, 7, & 8)	1
11	01-1M5818-00002	Water Supply (3 G.P.M.) (Double Rack Ovens) (ML-132523) (Incls. Items 1 thru 4, 6, 7, & 8)	1
12	01-1M5609-00001	Harness - Conduit Water Supply	1
13	01-100V16-00706	Label - Backflow Protection	1

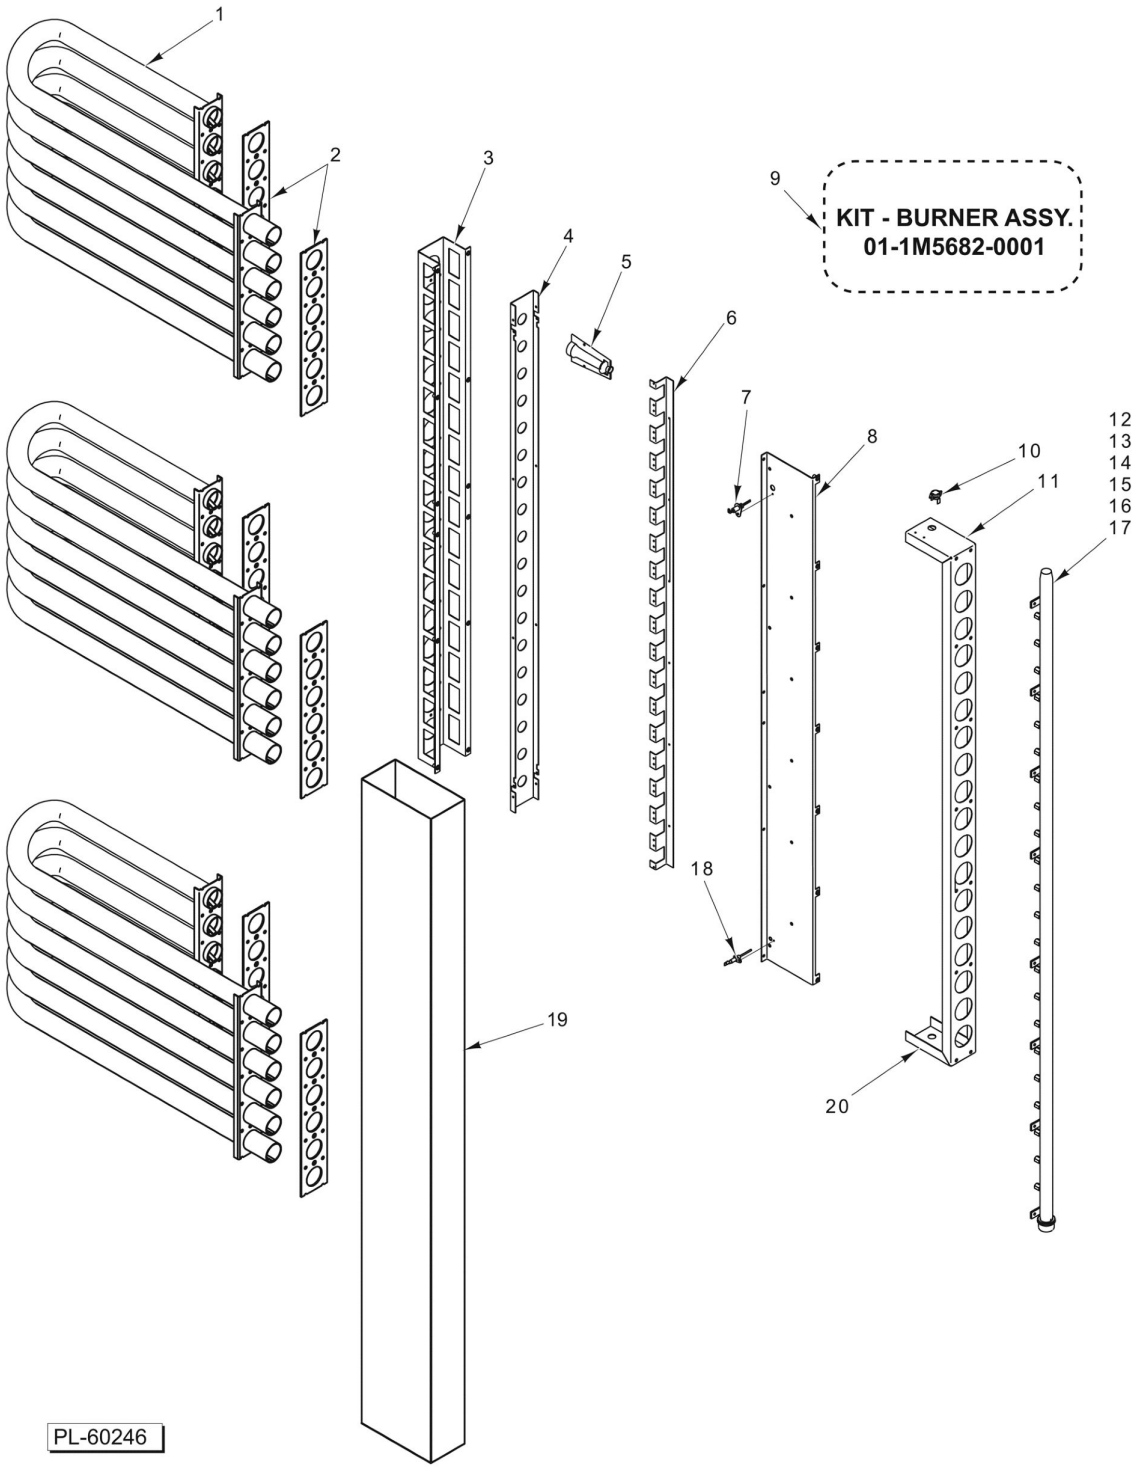

GAS BURNER AND HEAT CIRCULATION
(SINGLE RACK) (ML-132521)

GAS BURNER AND HEAT CIRCULATION (SINGLE RACK) (ML-132521)


ILLUS. PL-60246	PART NO.	NAME OF PART	AMT.
1	01-1M5477-00001	Heat Exchanger Tube Assy. (Incls. Item 2)	3
2	01-100V16-00530	Gasket - Heat Exchanger	6
3	01-1M6080-00001	Channel - Hat Burner Rack Assy	1
4	01-1M5467-00001	Plate - Firing (Burner Rack)	1
5	01-1000V9-00146	Burner - In-Shot (Crossover)	18
6	01-1M5465-00001	Mount - Burner	1
7	01-1000V9-00149	Ignitor - Hot Surface	1
8	01-1M5464-00001	Plate - Side (Burner Rack)	1
9	01-1M5682-00001	Kit - Burner Assy. (Incls. Items 3 thru 6, 8, 10, 11, & 20)	1
10	01-1M6717-00001	Switch - Flame Rollout	1
11	01-1M5468-00001	Enclosure - Burner Rack	1
12	01-1000V9-00174	Orifice #53 (0.059 In.) (NAT)	1
13	01-1000V9-00175	Orifice #63 (0.037 In.) (LP)	1
14	01-1000V9-00183	Orifice (0.052 Dia.) (Above 6,500 Ft.) (NAT)	1
15	01-1000V9-00184	Orifice (0.033 Dia.) (Above 6,500 Ft.) (PRO)	1
16	01-100V16-00610	Manifold Assy. (NAT)	1
17	01-100V16-00618	Manifold Assy. (LP)	1
18	01-1000V9-00169	Rod - Flame Sensor	1
19	01-1M5472-00001	Collector - Weldment	1
20	01-1M5463-00001	Box - Burner Assy. (Incls. Items 10 & 11)	1

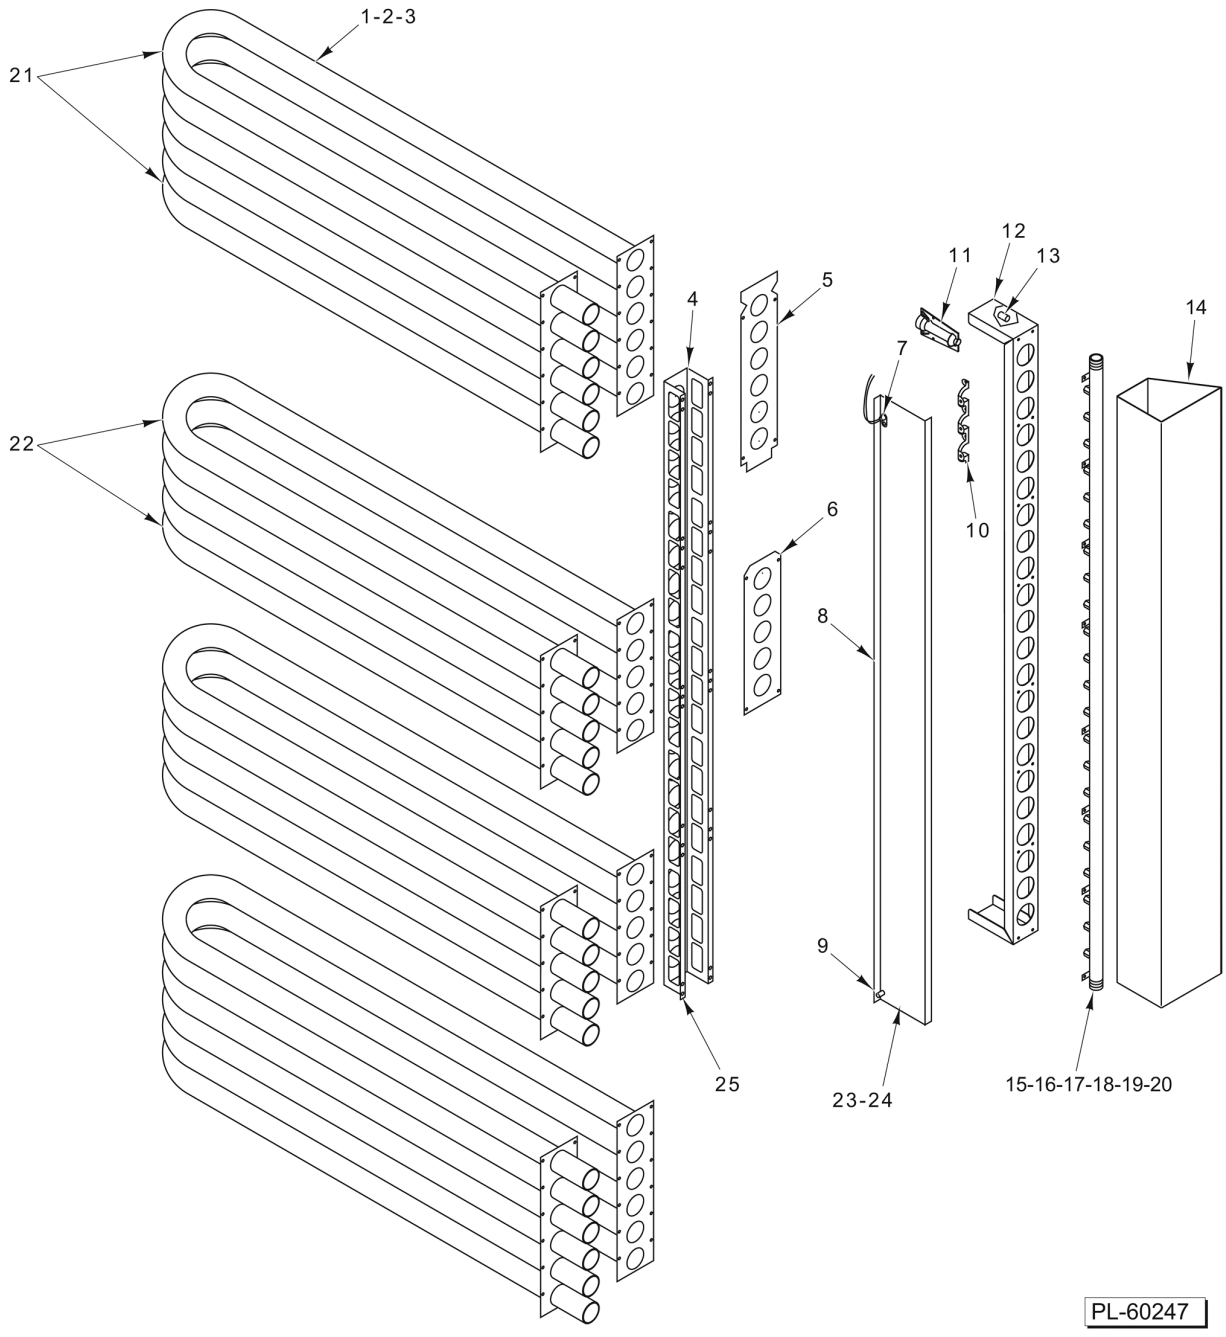

GAS BURNER AND HEAT CIRCULATION
(DOUBLE RACK) (ML-132523)

GAS BURNER AND HEAT CIRCULATION (DOUBLE RACK) (ML-132523)

ILLUS. PL-60247	PART NO.	NAME OF PART	AMT.
1	01-1M5001-00001	Kit - Double Tubs (No Collector) (Incls. Items 2, 3, 21, & 22)	1
2	01-100V16-00559	Gasket - Heat Exchanger (5-Hole)	4
3	01-100V16-00530	Gasket - Heat Exchanger (6-Hole)	4
4	01-1M5046-00001	Angle Rack - Burner	1
5	01-1M5045-00002	Plate - Firing (Burner Rack)	2
6	01-1M5045-00001	Plate - Firing (Burner Rack)	2
7	01-1000V9-00149	Ignitor - Hot Surface	1
8	01-1M5043-00001	Plate - Side (Burner Rack)	1
9	01-1000V9-00169	Rod - Flame Sensor	1
10	01-1M5594-00001	Mount - Burner (3)	2
11	01-1000V9-00146	Burner - In-Shot (Crossover)	22
12	01-1M5061-00001	Enclosure - Burner Rack	1
13	01-1000V9-00150	Switch - Flame Rollout (350 F.)	1
14	01-1M6035-00002	Collector - Weldment	1
15	01-100V16-0556A	Manifold Assy. (NAT)	1
16	01-100V16-0556B	Manifold Assy. (LP)	1
17	01-1000V9-00171	Orifice #49 (0.073 In.) (NAT)	1
18	01-1000V9-00173	Orifice #56 (0.046 In.) (PRO)	1
19	01-1000V9-00185	Orifice (0.0635 In.) (NAT) (Above 6500 Ft.)	1
20	01-1000V9-00186	Orifice (0.040 In.) (PRO) (Above 6500 Ft.)	1
21	01-1M5028-00002	Tube Assy. - Weldment (6-Tube)	2
22	01-1M5028-00001	Tube Assy. - Weldment (5-Tube)	2
23	01-1M5047-00001	Plate Assy. - Burner (Incls. Items 7 thru 11)	1
24	01-1M5463-00001	Box - Burner Assy. (Incls. Items 9 & 11)	1
25	01-1M5682-00002	Kit - Burner Assy. (Incls. Items 5, 6, 8, 10 thru 13, 23, & 24)	1

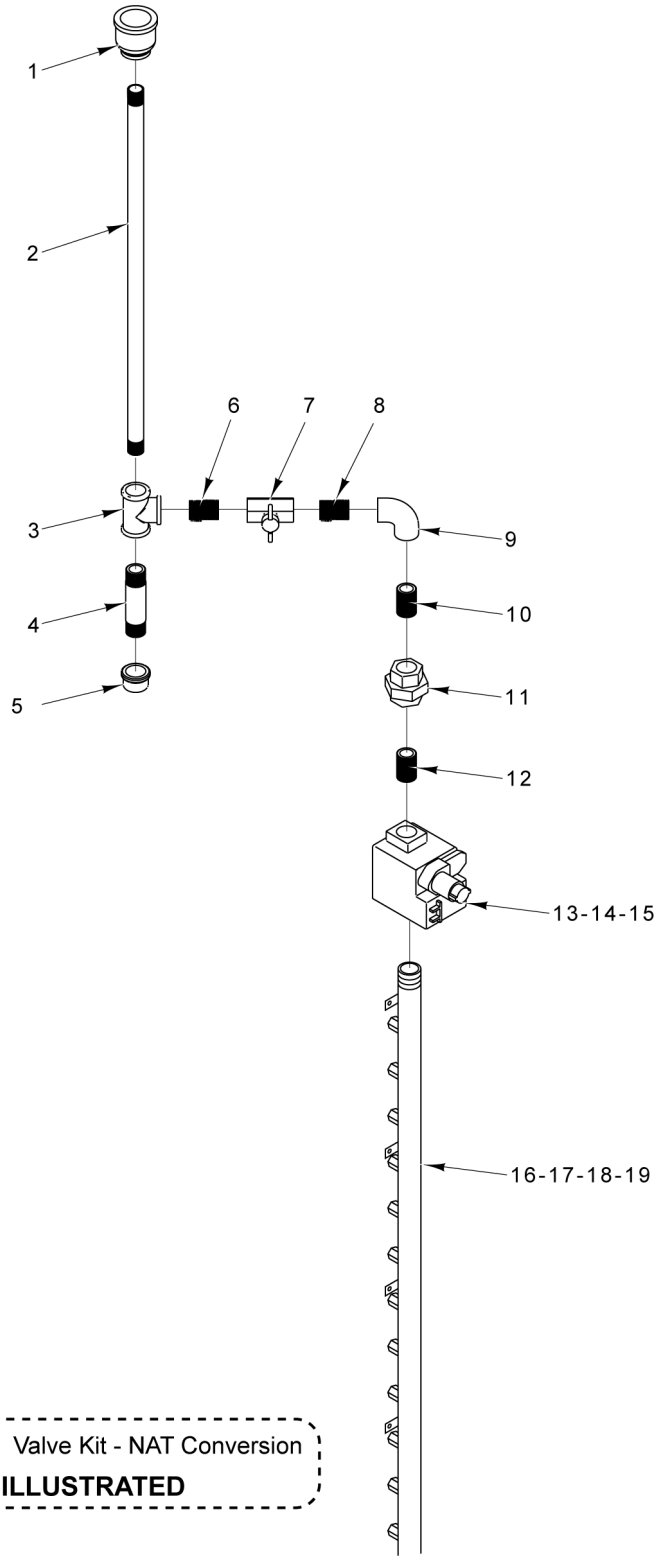

20 01-1M7467-00001 Valve Kit - NAT Conversion

PART NOT ILLUSTRATED

PL-60248

GAS SUPPLY PLUMBING

GAS SUPPLY PLUMBING

ILLUS. PL-60248	PART NO.	NAME OF PART	AMT.
1	01-100V17-00577	Bell - Reducer	1
2	01-10A982-02300	Pipe 3/4 In. Dia	1
3	01-100V17-00451	Tee 3/4 NPT x 3/4 NPT	1
4	01-10A982-00400	Pipe 3/4 Dia. X 4 In. Lg	1
5	01-100V17-00472	Cap - Pipe 3/4	1
6	FP-036-92	Pipe 3/4 x 1-3/8 TBE (Black)	1
7	01-100V17-00169	Valve - Gas 3/4 NPT	1
8	FP-036-92	Pipe 3/4 x 1-3/8 TBE (Black)	1
9	01-100V17-00513	Elbow - Pipe 90 Deg. x 3/4 NPT (Black)	1
10	FP-036-92	Pipe 3/4 x 1-3/8 TBE (Black)	1
11	01-100V17-00470	Union 3/4 NPT BLK #150	1
12	FP-036-92	Pipe 3/4 x 1-3/8 TBE (Black)	1
13	01-1000V9-00181	Valve - Combination Gas (3/4 In.)	1
14	01-1000V9-00127	Valve Kit - LP Conversion	1
15	01-1M5898-00002	Manifold - Gas Line (Incls. Items 1 thru 13)	1
16	01-100V16-00917	Manifold Assy. - Gas Supply (NAT)	1
17	01-100V16-00918	Manifold Assy. - Gas Supply (LP)	1
18	01-1M5900-00002	Gas Line Manifold Assy. (NAT) (Incls. Items 1 thru 13 & 16)	1
19	01-1M5900-00004	Gas Line Manifold Assy. (LP) (Incls. Items 1 thru 14 & 17)	1
20	01-1M7467-00001	Valve Kit - NAT Conversion	AR