

NOTES:

- A. ALL WIRING SHALL BE 14 AWG TYPE THHN-THWN-AWM, RATED 600V, 105 C
- B. ALL WIRING SHALL CONFORM TO THE NATIONAL AND CANADIAN ELECTRIC CODE.
- C. FREEZER TEMPERATURE SHALL MAINTAIN -10° TO 0° F.
- D. MILLION HEATER UL/CSA LISTED 'HEAT TECH', INC., 108" LG. DOUBLE SERIES HEATER CABLE RATED AT 115 VOLT, 30 WATT PER FOOT, W/2-48" LEADS HETEAR TAPE LEADS:  
 PRIMARY CIRCUIT - BLACK AND WHITE  
 SECONDARY CIRCUIT - BLUE AND YELLOW (CAPDFF SECONDARY LEADS)
- E. EVAPORATOR - 3/8" O.D. COPPER TUBING, COLD WALL CONSTRUCTION, APPROXIMATELY 576" LONG.
- F. CONDENSING UNIT IS UL LISTED - RATED AT 1/3 HP, 115 VOLT, 60HZ, 1PH, 404A REFRIGERANT

ITEM	PART NO.	QTY	DESCRIPTION
10	E-2-12	1	J- BOX, 2 X 4 X 2
9	E-2-3-1	1	PLATE, 2 X 4 GALV. COVER
8	P-1-207	1	COMPRESSOR, COPELAND #N4YL-0035-1A-204, 1/3 HP.
7	E-5-12-2	1	HEAT CABLE, DOUBLE, 115V, 108" LG.
6	P-1-53-1200	1	CAP TUBE #114, O50 I D X .114 O D, 120" LONG
5	P-1-23	1	DRYER, SPORLAN, #C-052-S HH
4	P-1-18-8	1	THERMOSTAT, CUTLER-HAMMER, #9530N1230
3	P-1-80	1	ACCUMULATOR, SPINCO #118033-1
2	E-4-15	1	THERMOMETER, F-DEC. #RR400 OR #RR100FA-24
1	E-10-12-10	1	CORD, 14/3 SJO 8' LG W/STRAIGHT PLUG

STORE NO. \_\_\_\_\_

ITEM NO. ASSEMBLY TEMPLATE B SHEET 1 OF 1

CUSTOMER: H & K Dallas Inc. DALLAS TEXAS

TITLE: ASSEMBLY,

DATE: 01MAR02

SYN: \_\_\_\_\_

REVISION: \_\_\_\_\_

DATE: \_\_\_\_\_

SCALE: NONE


NOTES:

THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF H&K. NO PART SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF H&K.

COMMENTS:

EMPLOYEE NAME: \_\_\_\_\_

CHECKED: \_\_\_\_\_

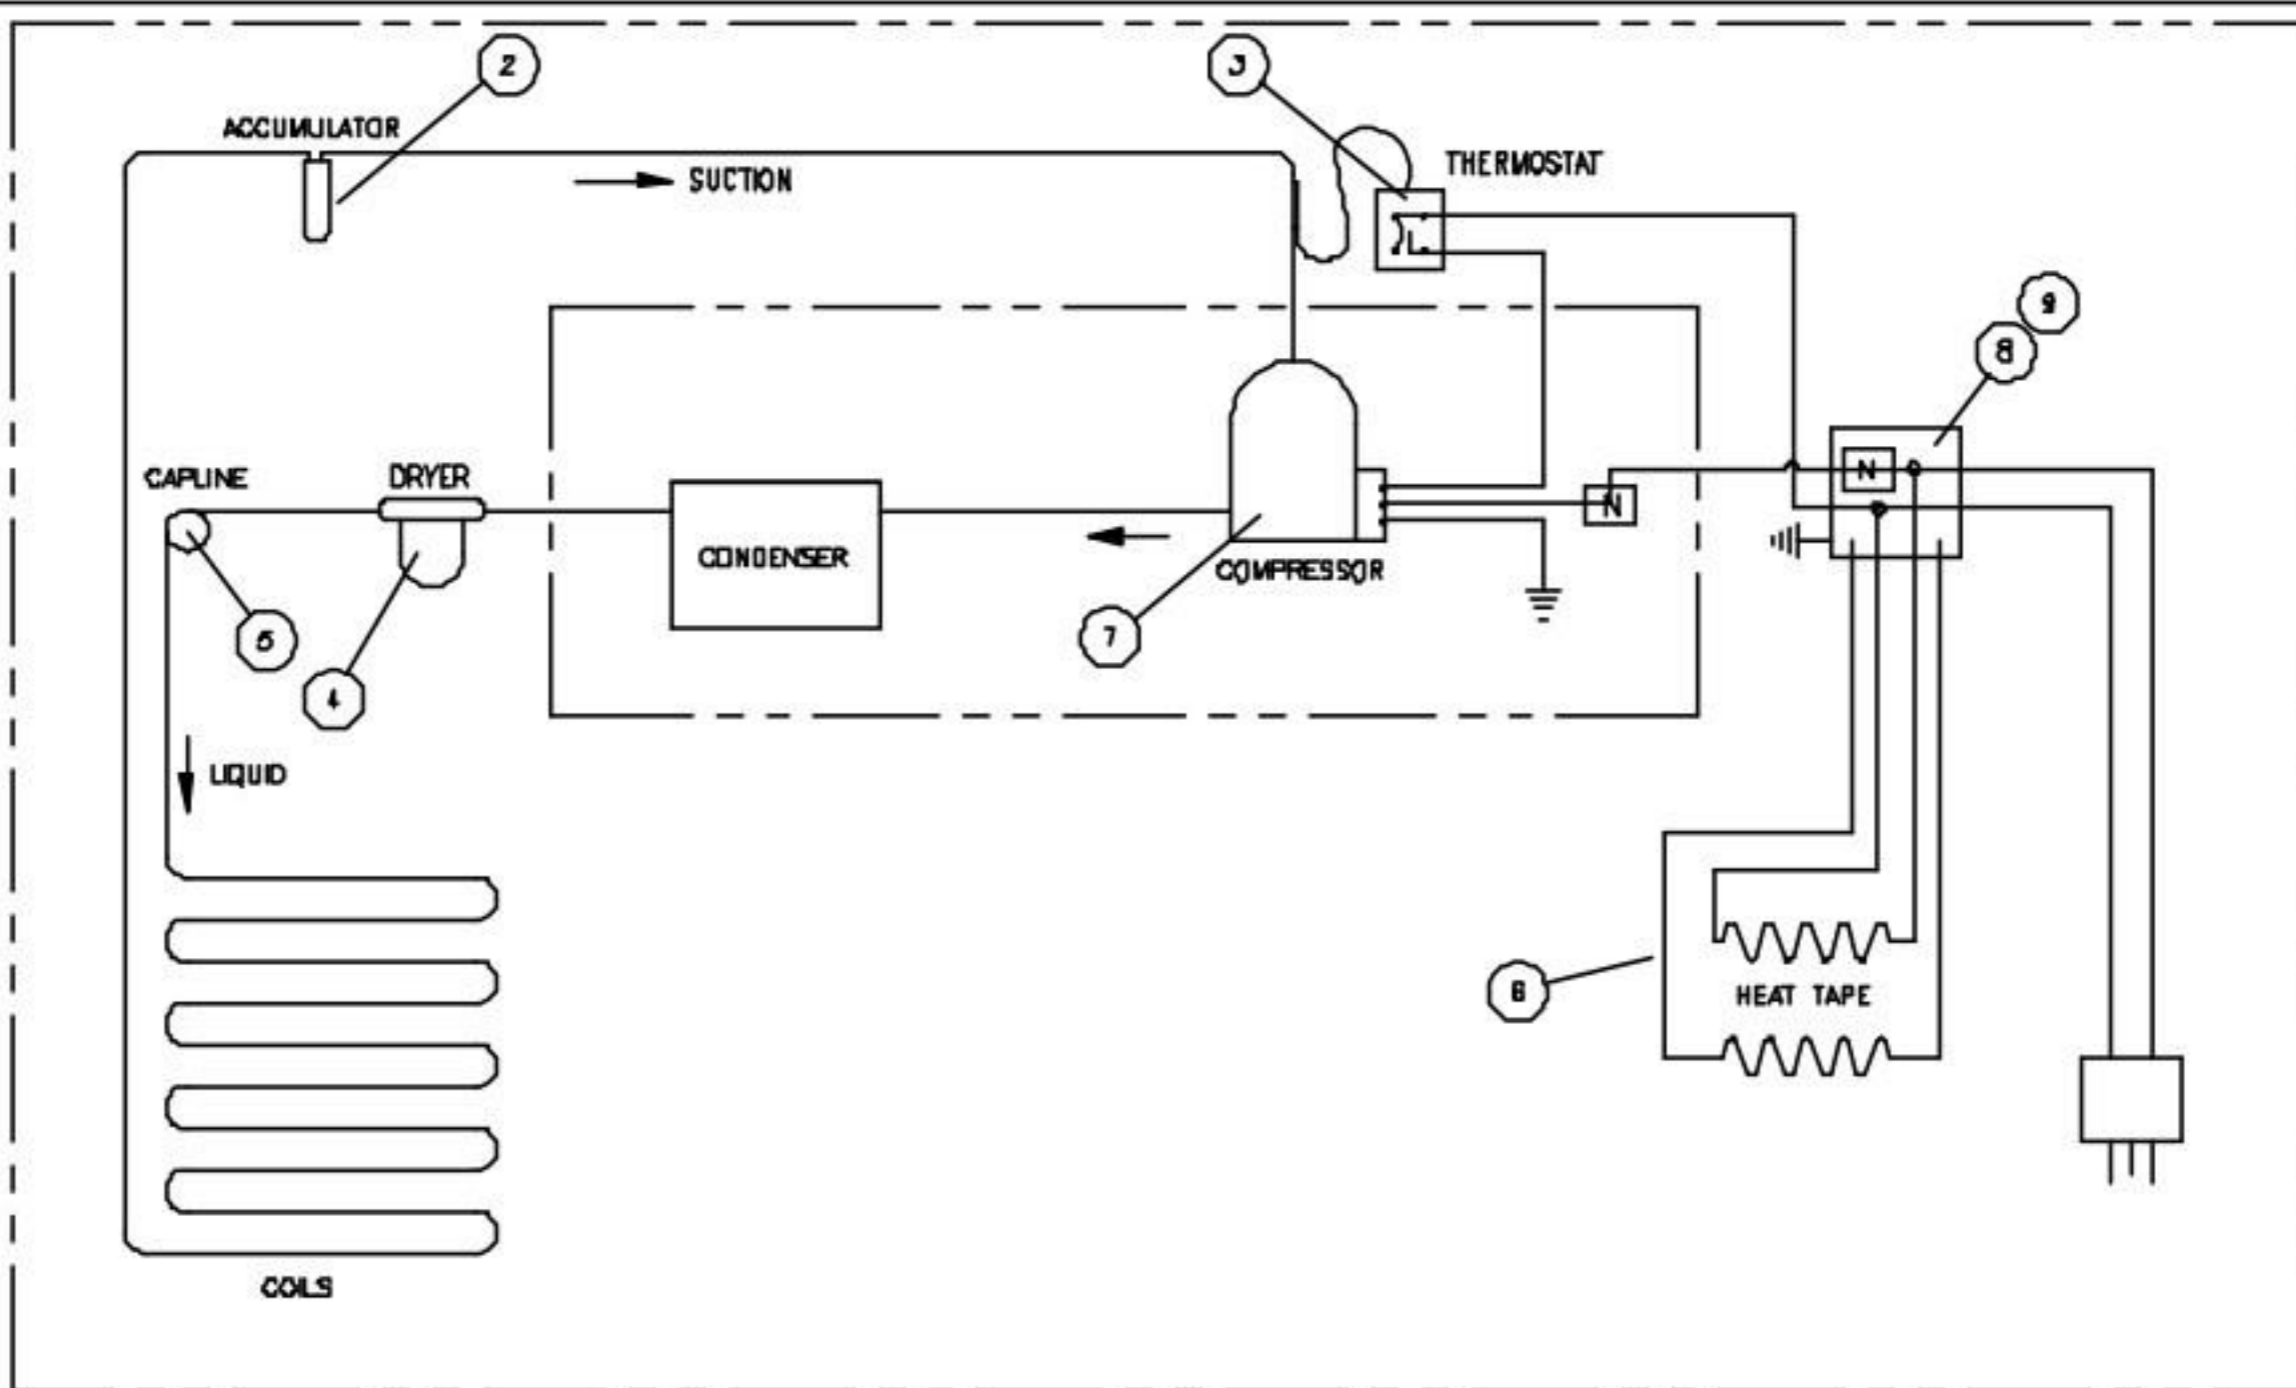

NOTES.

- A. ALL WIRING SHALL BE 14 AWG TYPE THHN-THWN-AWM, RATED 900V, 105 C
- B. ALL WIRING SHALL CONFORM TO THE NATIONAL AND CANADIAN ELECTRIC CODE.
- C. FREEZER TEMPERATURE SHALL MAINTAIN -10° TO 0° F.
- D. MILLION HEATER UL/CSA LISTED "HEAT TECH", INC., 84" LG. DOUBLE SERIES HEATER CABLE RATED AT 220 VOLT, 3.0 WATT PER FOOT, W/2-48" LEADS  
HEATER TAPE LEADS  
PRIMARY CIRCUIT - BLACK AND WHITE  
SECONDARY CIRCUIT - BLUE AND YELLOW  
(CAPOFF SECONDARY LEADS)
- E. EVAPORATOR - 3/8" O.D. COPPER TUBING, COLD WALL CONSTRUCTION, APPROXIMATELY 576" LONG.
- F. CONDENSING UNIT IS UL LISTED - RATED AT 1/3 HP, 220 VOLT, 50HZ, 1PH, 404A REFRIGERANT.

ITEM	PART NO	QTY	DESCRIPTION
9	E-2-12	1	J- BOX, 2 X 4 X 2
8	E-2-3-1	1	PLATE, 2 X 4 GALV COVER
7	P-1-2075	1	COMPRESSOR, COPELAND #M4YL003B-1AZ-3-4 1/3 HP 220/230 60HZ
6	E-9-12-25	1	HEAT CABLE, DOUBLE, 220V, 108" LG.
5	P-1-53-1200	1	CAP TUBE #114, O60 LD X 114 D O, 108" LONG
4	P-1-23	1	DRYER, SPORLAN, #C-052-S HH
3	P-1-18-6	1	THERMSTAT, CUTLER-HAMMER, #B530N1230
2	P-1-50	1	ACCUMULATOR, SPINCO # 118033-1
1	E-4-15	1	THERMOMETER, F-DEG. #RR400 OR #RR100FA-24

STORE NO		SHEET: 1 OF 1	DATE: 15FEB98	SYN	REVISION	DATE	SCALE: NONE
ITEM NO	WFO8SCH		DRAWN BY: M RONLAND				
CUSTOMER	MCDONALD'S CORPORATION		TITLE		SCHEMATIC, DOUBLE MOBILE MEAT FREEZER 220V/50HZ INTERNATIONAL		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HMC CONSULTANTS AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF HMC.							