


HUSSMANN®/CHINO Q2-SS SELF SERVICE CASE	Installation & Operation Manual REV. 0825
--	---

HUSSMANN®

Q2-SS
SELF SERVICE
CASE

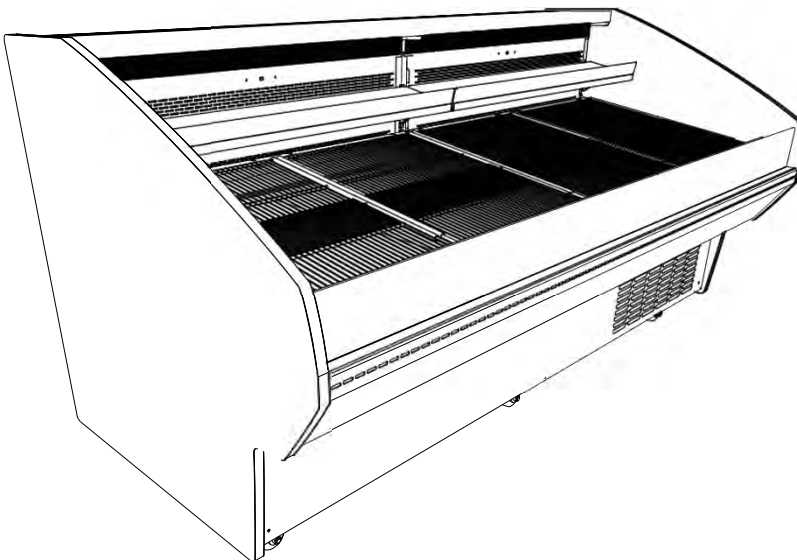

INSTALLATION & OPERATION GUIDE

1. General Instructions

HUSSMANN®/CHINO

A publication of HUSSMANN® Chino
13770 Ramona Avenue • Chino, California 91710
(909) 628-8942 FAX
(909) 590-4910
(800) 395-9229

www.husmann.com

This Booklet Contains Information on:

Q2-SS refrigerated, service deli merchandiser.

Shipping Damage

All equipment should be thoroughly examined for shipping damage before and during unloading.

This equipment has been carefully inspected at our factory and the carrier has assumed responsibility for safe arrival. If damaged, either apparent or concealed, claim must be made to the carrier.

Apparent Loss or Damage

If there is an *obvious loss or damage*, it must be noted on the freight bill or express receipt and signed by the carrier's agent; otherwise, carrier may refuse claim. The carrier will supply necessary claim forms.

Concealed Loss or Damage

When loss or damage *is not apparent until after all equipment is uncrated*, a claim for concealed damage is made. Make request in writing to carrier for inspection within 15 days, and retain all packaging. The carrier will supply inspection report and required claim forms.

Shortages

Check your shipment for any possible shortages of material. If a shortage should exist and is found to be the responsibility of Hussmann Chino, *notify Hussmann Chino*. If such a shortage involves the carrier, *notify the carrier immediately*, and request an inspection. Hussmann Chino will acknowledge shortages within ten days from receipt of equipment.

Hussmann Chino Product Control

The serial number and shipping date of all equipment has been recorded in Hussmann's files for warranty and replacement part purposes. All correspondence pertaining to warranty or parts ordering must include the serial number of each piece of equipment involved, in order to provide the customer with the correct parts.


Keep this booklet with the case at all times for future reference.

2. Table of Contents


1. General Instructions.....	2
2. Table of Contents	3
3. Cut and Plan Views	4
4. Installation.....	5
5. Plumbing	9
6. Refrigeration	9
7. Spec Sheet	10
8. Electrical.....	12
9. Wiring Diagrams index.....	13
10. Wiring Diagrams	14
11. User Information	31
12. Maintenance.....	32
13. Troubleshooting Guide	35
14. Appendices	37
15. Controller Parameters.....	40
16. Danfoss Controller Operations	44
17. Dixell Controller Operations.....	45

3. Cut and Plan Views

Q2-SS-SC
Self-Service Self-Contained

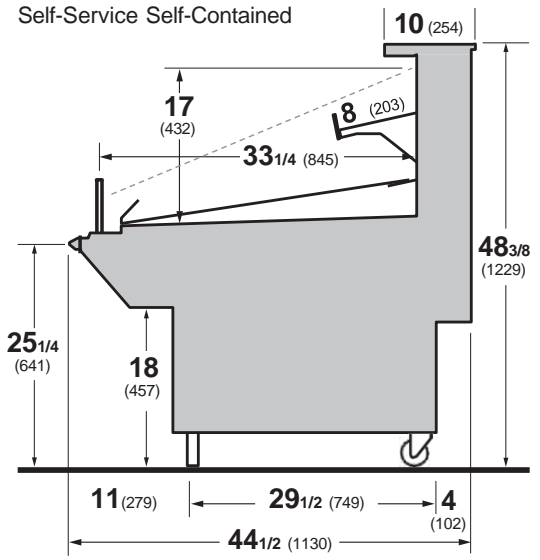

Q2-SS-SC Self Service Self-Contained

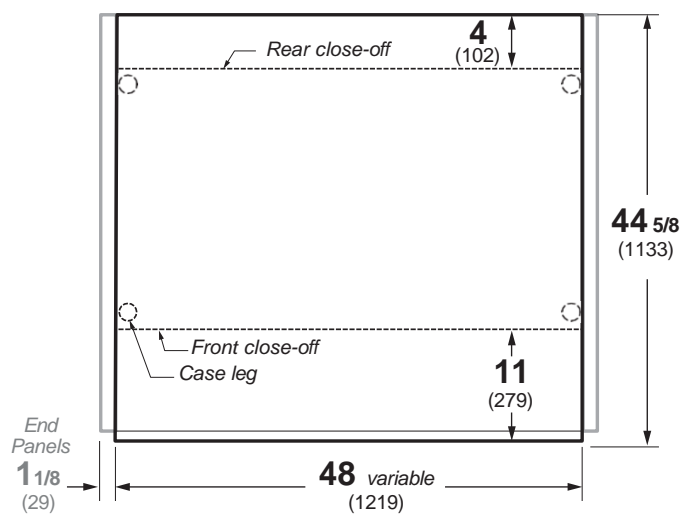

4. Installation

Location

The refrigerated merchandisers have been designed for use only in air conditioned stores where temperature and humidity are maintained at or below 75°F and 55% relative humidity. DO NOT allow air conditioning, electric fans, ovens, open doors or windows (etc.) to create air currents around the merchandiser, as this will impair its correct operation.

NOTE: MAINTAIN MIN. CLEARANCE OF 15' FROM DOORS, VENTS OR HIGH HEAT SOURCES.

Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product.

Uncrating the Stand

Place the fixture as close to its permanent position as possible. Keep in place, attached case until ready to set/bolt to adjoining case.

Tighten Glass Screws

Tighten screws along clamshell located on the underside of glass before placing unit into operation.

Exterior Loading

These models have not been structurally designed to support excessive external loading. Do not walk on their tops; This could cause serious personal injury and damage to the fixture.

Setting and Joining

The sectional construction of these models enable them to be joined in line to give the effect of one continuous display.

An Alignment pin kit is supplied with every case and must be used in alignment.

Leveling

IMPORTANT! IT IS IMPERATIVE THAT CASES BE LEVELED FROM FRONT TO BACK AND SIDE TO SIDE PRIOR TO JOINING. A LEVEL CASE IS NECESSARY TO INSURE PROPER OPERATION, WATER DRAINAGE, GLASS ALIGNMENT AND OPERATION OF THE HINGES SUPPORTING THE GLASS. LEVELING THE CASE CORRECTLY WILL SOLVE MOST HINGE OPERATION PROBLEMS.

- Using case blueprints, measure off and mark on the floor the exact dimensions of where the cases will sit. Snap chalk line for front and back positions of base rail or pedestal. Mark the location of each joint front and back. Find the highest point throughout the lineup. **FLOORS ARE NORMALLY NOT LEVEL!** Determine the highest point of the floor; cases will be set off this point. All cases in the entire lineup must be brought up to the highest level of the case sitting at the highest point in the lineup. This may be done a few different ways.
 - Walk the floor looking for any mounds or dips.
 - Use a string level.
 - Use a transit.
 If a wedge is used in the middle of a lineup, the wedge must be set on the highest point on the floor **FIRST**, with the rest if the lineup being leveled from it. The Q2-SS case has adjustable legs to allow for leveling.
- Set first case over the highest part of the floor and adjust legs so that case is level. Remove side and back leg braces after case is set and joined.
- Set second case within one foot (1') of the first case, and remove leg skids. Keep the supports along the length of the case and far end of case. Level case to the first using the instructions in step one.
- Apply masking tape 1/8" in from end of case on inside and outside rear mullion and body work on both cases to be joined.
- Apply liberal bead of case joint sealant (butyl) to first case. Sealant area is shown using a dotted line in illustration in Step 8. Apply heavy amount to cover entire shaded area.

DO NOT USE PERMAGUM!



**ATTENTION
INSTALLER**

It is the contractor's responsibility to install case(s) according to local construction and health codes.

- Slide second case up to first case snugly. Then level second case to the first case so glass front, bumper and top are flush.




CAUTION

Do not use bolts to pull cases together.

Installation (Cont'd)

7. To compress butyl at joint, use two Jurgenson wood clamps. Make sure case is level from front to back and side to side on inside bulkheads at joint.
8. Attach sections together via the bolts pictured in the illustration below.
9. Apply bead of butyl to top of bulk heads and slip on stainless steel bulkhead cap. Also apply silicone to seam between joints.
10. Use finger to smooth silicone as thin as possible at masking tape on inside and outside of rear mullion (apply additional silicone if necessary). Remove tape applied on line #4.
11. Remove front, back and end shipping braces.

- Drawing is typical to Q-Series cases, self-service Q-series cases are excluded from galss and derive form the drawing as shown below.

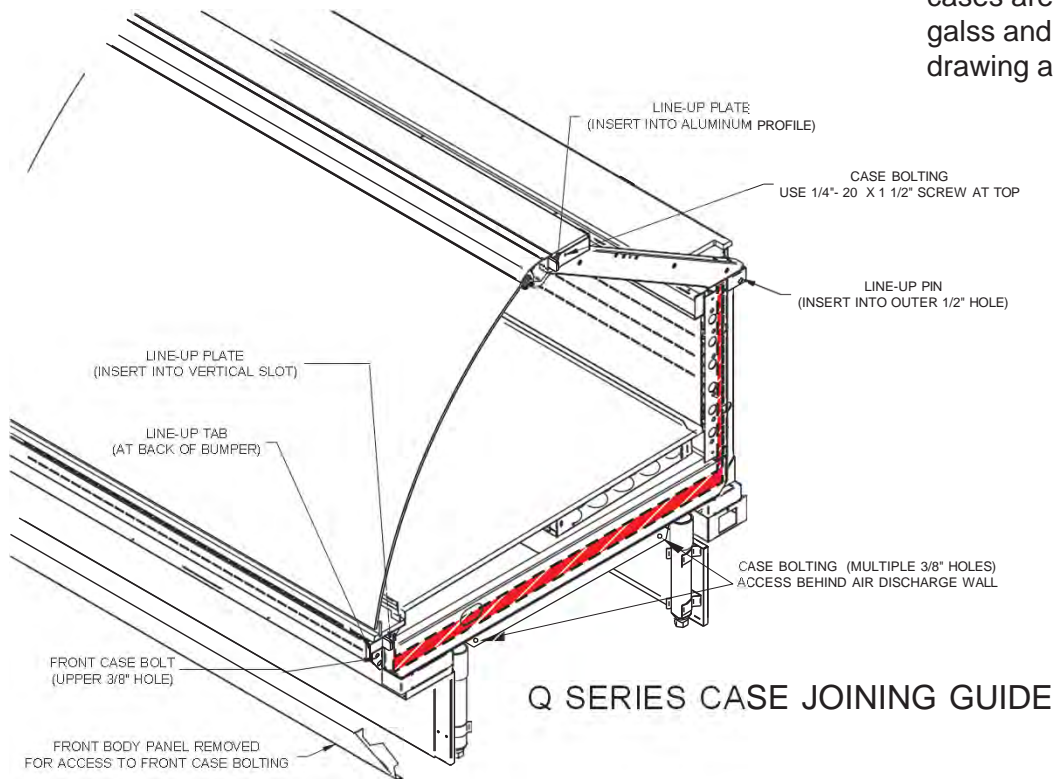


Q SERIES CASE JOINING GUIDE

Line Up Tab



Line Up Plate



**ATTENTION
INSTALLER**

It is the contractor's responsibility to install case(s) according to local construction and health codes.

Installation (Cont'd)

Bumper Installation Instructions



Step 1: Make sure the aluminum channel and end caps are installed.



Step 2: Use silicone lubricant to help the bumper slide into the channel.



Step 3: Starting on one end: while inserting the bumper, push it up against the end cap to prevent the bumper from shrinking after installation (when it gets cold).



Step 4: As you insert the bumper into the channel with one hand, pull the bumper toward you with the other to open the inside lips. Slowly apply pressure by rolling the bumper into the track.


WARNING!

Do NOT apply thread sealer to ABS P-Trap.




Body Panel Removal

To remove the lower body panels follow the demonstration shown below.

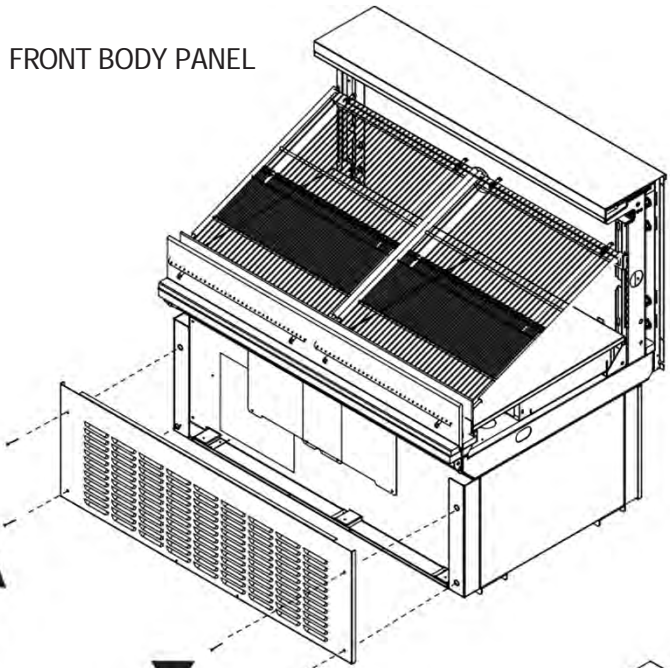

Unfasten screws to remove front Lower Body Panels.

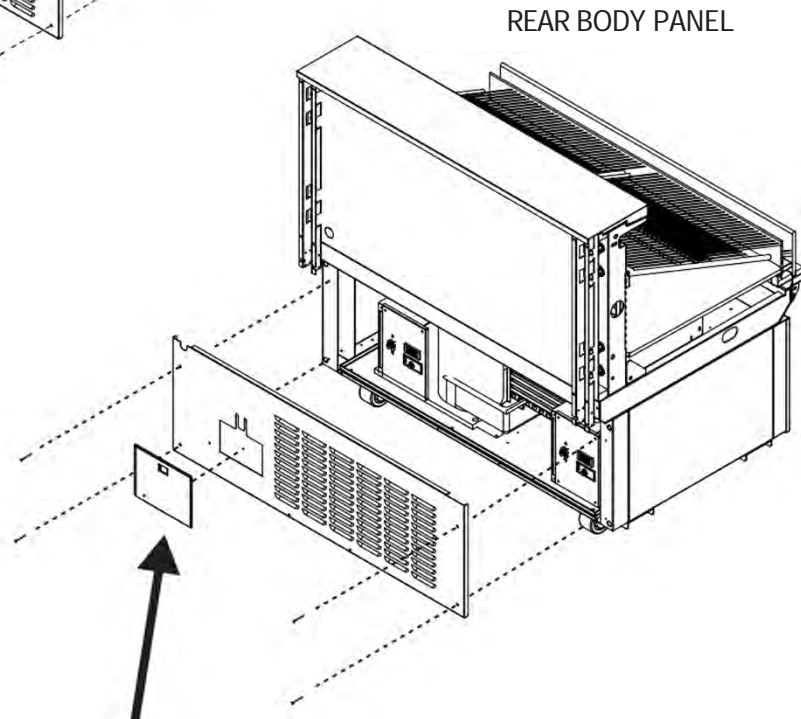

DF Controller access cover plate located on rear Body Panel. Lift and pull outward to remove.

5. Plumbing

Waste Outlet and P-TRAP

The waste outlet is located off the center of the case on one side allowing drip piping to be run lengthwise under the fixture.

P-traps must be installed at the base of all refrigerated cases. The 1 1/2" P-TRAP and threaded adapter must be installed to prevent air leakage and insect entrance into the fixture.

Installing Condensate Drain

Poorly or improperly installed condensate drains can seriously interfere with the operation of this refrigerator, and result in costly maintenance and product losses. Please follow the recommendations listed below when installing condensate drains to insure a proper installation:

1. Never use pipe for condensate drains smaller than the nominal diameter of the pipe or P-TRAP supplied with the case.
2. When connecting condensate drains, the P-TRAP must be used as part of the condensate drain to prevent air leakage or insect entrance. Store plumbing system floor drains should be at least 14" off the center of the case to allow use of the P-TRAP pipe section. Never use two water seals in series in any one line. Double P-TRAPS in series will cause a lock and prevent draining.
3. Always provide as much down hill slope ("fall") as possible; 1/8" per foot is the preferred minimum. PVC pipe, when used, must be supported to maintain the 1/8" pitch and to prevent warping.
4. Avoid long runs of condensate drains. Long runs make it impossible to provide the "fall" necessary for good drainage.
5. Provide a suitable air break between the flood rim of the floor drain and outlet of condensate drain. 1" is ideal.
6. Prevent condensate drains from freezing:
 - a. Do not install condensate drains in contact with non-insulated suction lines. Suction lines should be insulated with a nonabsorbent insulation material such as Armstrong's Armaflex.
 - b. Where condensate drains are located in dead air spaces (between refrigerators or between a refrigerator and a wall), provide means to prevent freezing. The water seal should be insulated to prevent condensation.

6. Refrigeration

Refrigerant Type

The standard refrigerant will be R-404A unless otherwise specified on the customer order. Check the serial plate on the case for information.

Piping

The refrigerant line outlets are located under the case. Locate first the electrical box, the outlets are then on the same side of the case, but at the opposite end. Insulate suction lines to prevent condensation drippage.

Refrigeration Lines

<u>Liquid</u>	<u>Suction</u>
3/8" O.D.	5/8" O.D.

NOTE: The standard coil is piped at 1/2" (suction); however, the store tie-in may vary depending on the number of coils and the draw the case has. Depending on the case setup, the connecting point in the store may be 5/8", 7/8", or 1 1/8". Refer to the particular case you are hooking up.

Refrigerant lines should be sized as shown on the refrigeration legend furnished by the store.

Oil traps must be installed at the base of all suction line vertical risers on refrigerated cases.

Pressure drop can rob the system of capacity. To keep the pressure drop to a minimum, keep refrigerant line run as short as possible, using the minimum number of elbows. Where elbows are required, use long radius elbows only.

Control Settings

See Q2-SS technical data sheet for the appropriate settings for your merchandiser. Maintain these parameters to achieve near constant product temperatures. Product temperature should be measured first thing in the morning, after having been refrigerated overnight. For all multiplexing, defrost should be time terminated. Defrost times should be as directed in the Q2-SS technical data sheet. The number of defrosts per day should never change. The duration of the defrost cycle may be adjusted to meet conditions present at your location.

7. Spec Sheet





SELF-SERVICE DELI & MEAT
HUSSMANN - Q2-SS-R / Q2-SSM-R

REVISION DATE 08/06/25

DOE 2017 Energy Efficiency Compliant
 Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.



Q2-SS
 Multi-deck Self-Service

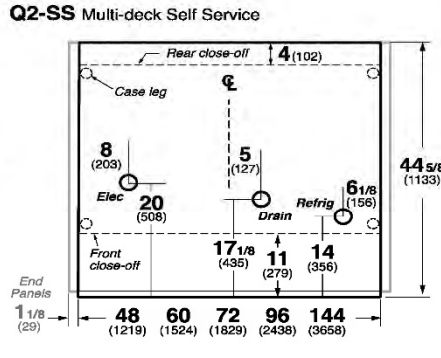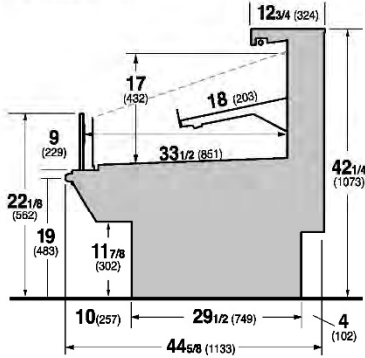

REFRIGERATION DATA:

CASE LENGTHS/ WEDGES	CASE USAGE	CAPACITY *** (BTU/HR/FT) (TOTAL FOR WEDGES)		TEMPERATURE (°F)			VELOCITY (FT/MIN)
		RATING CONDITION		EVAPORATOR		DISCHARGE AIR ** (°F)	
		NSF 7	AHRI 1200	NSF 7	AHRI 1200	NSF 7	
4', 5', 6', 8', 10', 12'	DELI	640	640	22	22	28-30	150-175
22.5 OS	DELI	2995	2995	22	22	30-32	150-175
90° OS	DELI	2410	2410	22	22	28-30	150-175
REAR STORAGE	DELI	100	90	22	22	30-34	380-600

CASE LENGTH	EST. REFG. CHR.G. 404a (LBS)	GLYCOL (20°F INLET, 6° RISE) FRONT		GLYCOL (20°F INLET, 6° RISE) REAR STORAGE	
		GPM	PSI	GPM	PSI
		4'	0.5	0.9	2.4
5'	0.6	0.9	2.5	0.1	0.1
6'	0.7	1.4	5.4	0.2	0.2
8'	1.0	1.8	2.5	0.3	0.4
10'	1.4	2.2	4.3	0.3	0.6
12'	1.5	2.6	5.1	0.4	0.8
90° OS	0.3	0.7	1.4	N/A	N/A

**FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB; REAR STORAGE MEASURED AT EXIT TO COIL
 ***REFRIGERATION NOTES:

- 1) BTU'S DO NOT INCLUDE LIGHTS
- 2) AHRI 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

LOCATION	ELEC. THERMOSTAT / AIR SENSOR SETTINGS		DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
	USAGE	CUT IN (°F)						
FRONT	DELI	31	28	OFF TIME	35	48	N/A	4.2
REAR STORAGE	DELI	35	32			45		0.7

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA: STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS; SELF-SERVICE SECTION				EVAP FANS; REAR STORAGE (IF APPLICABLE)		CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS (IF EQUIPPED)		
	# OF EVAP FANS	MOTOR RPM	DIAM (MM) / PITCH	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	2	1450	172 / 28°	0.16	24	0.30	9	0.09	10	0.09	10	0.18	21	0.17	20
5'	2	1450	172 / 28°	0.16	24	0.30	9	0.00	13	0.11	13	0.11	26	0.26	30
6'	3	1450	172 / 28°	0.24	36	0.30	9	0.16	18	0.16	18	0.31	36	0.26	30
8'	4	1450	172 / 28°	0.32	48	0.30	9	0.18	21	0.18	21	0.36	41	0.35	40
10'	4	1450	172 / 28°	0.32	48	0.30	9	0.23	26	0.23	26	0.45	52	0.43	50
12'	6	1450	172 / 28°	0.48	72	0.30	9	0.27	31	0.27	31	0.54	62	0.52	60
22.5° OS	1	NA	AXIAL	1.8	48	0.30	9	0.27	31	0.27	31	0.54	62	0.52	60
90° OS	2	1450	172 / 28°	0.16	24	N/A	N/A	0.04	5	0.04	5	0.09	10	0.26	30

OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS H.O. LED		OPTIONAL SHELF H.O. LED		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	0.13	15	0.26	30	0.40	46
5'	0.11	13	0.23	26	0.34	39
6'	0.23	26	0.45	52	0.68	78
8'	0.26	30	0.53	61	0.79	91
10'	N/A	N/A	N/A	N/A	N/A	N/A
12'	0.40	46	0.79	91	1.19	137
22.5° OS	N/A	N/A	N/A	N/A	N/A	N/A
90° OS	N/A	N/A	N/A	N/A	N/A	N/A

Spec Sheet (Cont'd)





SELF-SERVICE DELI
HUSSMANN - Q2-SS-S

REVISION DATE 09/01/22



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

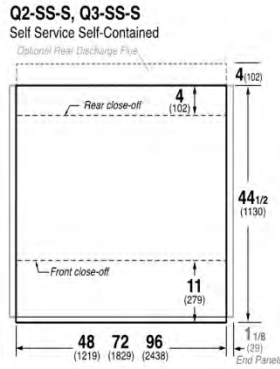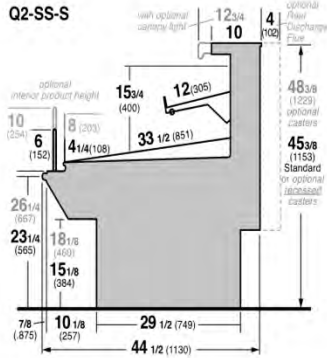

REFRIGERATION DATA:

CASE LENGTHS	CASE USAGE	CONVENTIONAL CAPACITY ** (BTUHR/FT)	DISCHARGE AIR * (°F)	VELOCITY (FT/MIN)
3', 4', 6', 8'	SS DELI	830	26~32	150~200

*FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB

**REFRIGERATION NOTES:

- 1) CAPACITY FOR REFERENCE ONLY
- 2) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT.
- 3) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

USAGE	CONTROLLER / AIR SENSOR SETTINGS		DEFROST TYPE	FAILSAFE TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) AIR	DRIP TIME (MIN)	DEFROST WATER (LBS/DAY/FT)
	SET POINT (°F)	DIFFERENTIAL (°F)						
DELI	24	8	OFF TIME	50	4	48	NA	4.2
MEAT	20	8	OFF TIME	50	4	48	NA	4.2

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA:

STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS					CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS		CONVENIENCE OUTLETS (OPTIONAL)		
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	# OUTLETS	VOLTS	AMPS
2'	1	6.7	15	0.12	8	0.0	5	0.09	10	0.1	15	0.17	20	N/A	N/A	N/A
3'	2	6.7	15	0.24	16	0.1	8	0.13	15	0.2	23	0.17	20	N/A	N/A	N/A
4'	2	6.7	15	0.24	16	0.1	10	0.18	21	0.3	31	0.17	20	N/A	N/A	N/A
6'	3	6.7	15	0.36	24	0.1	15	0.13	15	0.3	31	0.26	30	N/A	N/A	N/A
8'	4	6.7	15	0.48	32	0.2	21	0.18	21	0.4	41	0.35	40	N/A	N/A	N/A

CONDENSING UNIT AND EVAPORATIVE PANS

CASE LENGTH	CONDENSING UNIT					EVAPORATIVE PAN			EST. REFG. CHR.G. (LBS)	NEMA PLUG
	NOM. HP	REFRIG.	HZ/PH	VOLTS	RLA	VOLTS	AMPS	WATTS		
2'	1/4	R-404A	60 / 1	115	8.0	115	8.3	1000	2.2	L5-30P
3'	1/2		60 / 1	115	9.2	115	8.3	1000	2.5	L5-30P
4'	1/2		60 / 1	115	10.5	115	8.3	1000	3.7	L5-30P
6'	3/4		60 / 1	240	9.0	208/230	6.3	1500	5.6	L14-30P
8'	1		60 / 1	240	10.0	208/230	6.3	1500	6.6	L14-30P
2'	1/4		R-448A	60 / 1	115	8.0	115	8.3	1000	2.2
3'	1/3	60 / 1		115	7.2	115	8.3	1000	2.5	L5-30P
4'	1/2	60 / 1		115	10.0	115	8.3	1000	2.2	L5-30P
6'	3/4	60 / 1		240	9.0	208/230	6.3	1500	3.0	L14-30P
8'	1	60 / 1		240	9.3	208/230	6.3	1500	3.7	L14-30P

OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS		OPTIONAL SHELF		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
2'	N/A	N/A	N/A	N/A	N/A	N/A
3'	0.1	13	0.3	34	0.4	47
4'	0.1	15	0.4	41	0.5	56
6'	0.4	47	0.5	63	1.0	110
8'	0.3	30	0.4	51	0.7	81

8. Electrical

Wiring Color Code

Standard Case Wire Color Code	
Color Description	Color
■ Ground	Green
■ Anti-Sweat	Purple
■ Lights	Orange
■ Receptacles	Yellow
■ T-Stat/Solenoid 230VAC	Red/Black
■ T-Stat/Solenoid 115VAC	White/Black
■ T-Stat/Solenoid 24VAC	Red/White
■ Fan Motors	Brown
Blue Condensing Unit	

Use Copper Conductors Only
430-01-0338 R101003

CASE MUST BE GROUNDED


NOTE: Refer to label affixed to case to determine the actual configuration as checked in the "TYPE INSTALLED" boxes.

Electrical Circuit Identification

Standard lighting for all refrigerated models will be full length fluorescent lamps located within the case at the top.

The switch controlling the lights, the plug provided for digital scale, and the thermometer are located at the rear of the case mullion.

The receptacle that is provided on the exterior back of these models is intended for computerized scales with a five amp maximum load, not for large motors or other high wattage appliances. It should be wired to a dedicated circuit.



DANGER

BEFORE SERVICING
ALWAYS DISCONNECT ELECTRICAL
POWER AT THE MAIN DISCONNECT
WHEN SERVICING OR REPLACING ANY
ELECTRICAL COMPONENT.

This includes (but not limited to) Fans, Heaters
Thermostats, and Lights.

Field Wiring and Serial Plate

Amperage

Field Wiring must be sized for component amperes printed on the serial plate. Actual ampere draw may be less than specified. Field wiring from the refrigeration control panel to the merchandisers is required for refrigeration thermostats. Case amperes are listed on the wiring diagram, but always check the serial plate.

LED Driver Location

Drivers are located within the access panel that runs the length of the rear of the case.

ASHRAE Color Code

NOTE: All other manufacturers have no standard sensor codes.

Case Control Systems SENSOR COLOR			
Manufacturer ® >	EIL	CPC	
Location			
Coil Inlet	Color	Blue	Blue
	Part#	225-01-1755	225-01-3255
Coil Outlet	Color	Red	Red
	Part#	225-01-1757	225-01-3123
Discharge Air	Color	Green	Green
	Part#	225-01-1756	225-01-3260
Return Air	Color	Purple	Green
	Part#	225-01-1758	225-01-3260
Defrost Term.	Color	White	Orange
	Part#	225-01-0650	225-01-3254
Liquid Line	Color	White	Blue
	Part#	225-01-0650	225-01-3255

9. Wiring Diagrams Index


Q2-SS-4-R	4'	3013766
Q2-SS-5-R	5'	3013767
Q2-SS-6-R	6'	3013768
Q2-SS-8-R	8'	3013769
Q2-SS-10-R	10'	3070612
Q2-SS-12-R	12'	3013770
Q2-SS-22.5O-R		3070795
Q2-SSN-90OR		3155229
Q2-SS-2S R-448A	2'	3126632
Q2-SS-3S R-404A/448A	3'	3126633
Q2-SS-4S R-448A	4'	3126635
Q2-SS-6S R-448A	6'	3126636
Q2-SS-8S R-404A/448A	8'	3126638
Q2-SS-2-S W/XR75 CTRLR	2'	3157126
Q3-SS-4S W/XR75 CTRLR	4'	3156674
Q3-SS-6S W/XR75 CTRLR	6'	3157153
Q3-SS-8-S W/XR75 CTRLR	8'	3156422

CIRCUIT #1
LOADING


120V			
115V			

REVISION HISTORY			
REV	EN	DATE	DESCRIPTION
A	ECN-CAP-0003236	2018/08/23	RELEASED TO PRODUCTION
B	ECN-CO-0005276	2020/02/18	NEW LIGHTS
C	ECN-CO-0018444	2023/09/28	CHANGED FANS & LIGHTS

SUCTION SOLENOID





EVAPORATOR FAN MOTOR
.07A 12W @ 120VAC
3174935

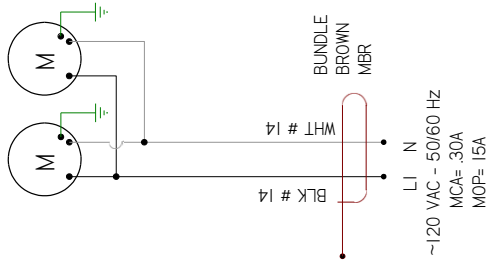


OPTIONAL:
LIGHT CIRCUIT .22A 23.6W @120V





SHELF LIGHT CANOPY LIGHT

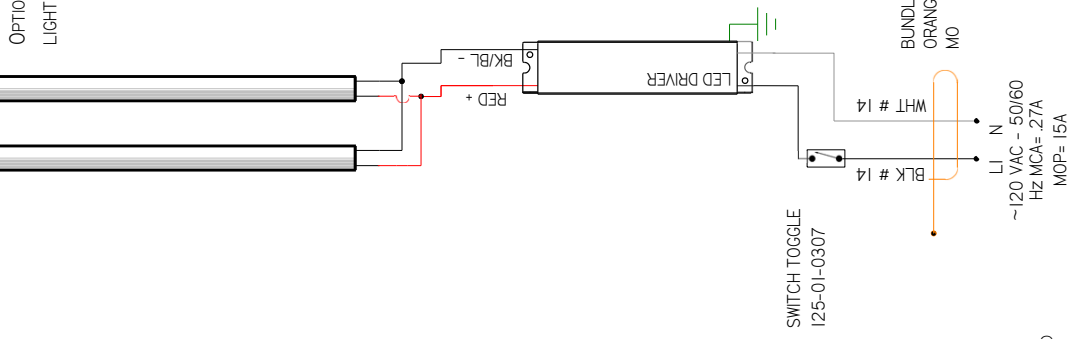

OPTIONAL:
ANTI-SWEAT HTR
0495009
20 WATTS
0.17AMP@120V

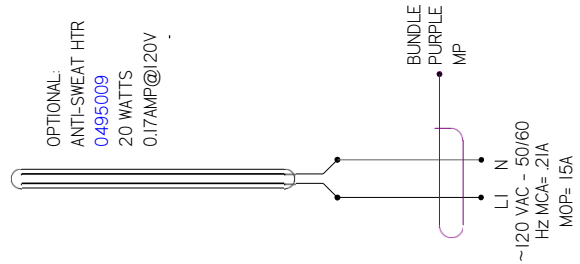

NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT



HUSSMANN
DIAGRAM-Q2-SS-4-R

MATERIAL - NA
DATE DRAWN - 8-23-16
DRAWN BY - CRAIG BOOREY
ECN-CAP-0003236
REVIEWED BY - CRAIG BOOREY
REF -
APPROVED BY - CRAIG BOOREY
SHEET 1 OF 1
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
HOLE DIMENSIONS .XX +0.03 .XXX
DECIMALS .XX +0.03 .XXX
ANGLES ± 2°

3013766 | C




CIRCUIT #1
LOADING


120V	
107%	

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHK BY	APP BY
A	ECN-CAP-0003236	2016/06/23	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-CO-0005276	2022/02/28	NEW LIGHTS	CB	CB	CB
C	ECN-CO-0008444	2023/06/28	CHANGED FANS & LIGHTS	CB	CB	CB
D	ECN-CO-0018715	2023/11/01	NEW FAN MOTORS	CB	CB	CB


SUCTION SOLENOID




OPTIONAL:
ANTI-SWEAT HTR
TBD
25 WATTS
0.23 AMP@120V

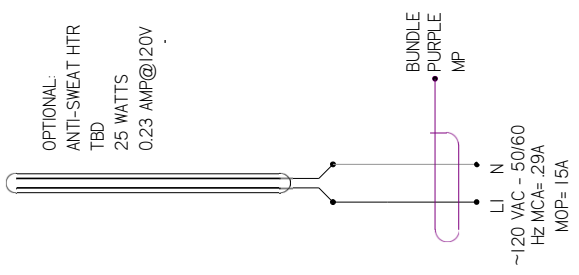


SHELF LIGHT





CANOPY LIGHT



OPTIONAL
LIGHT CIRCUIT 29A 31.8W @120V

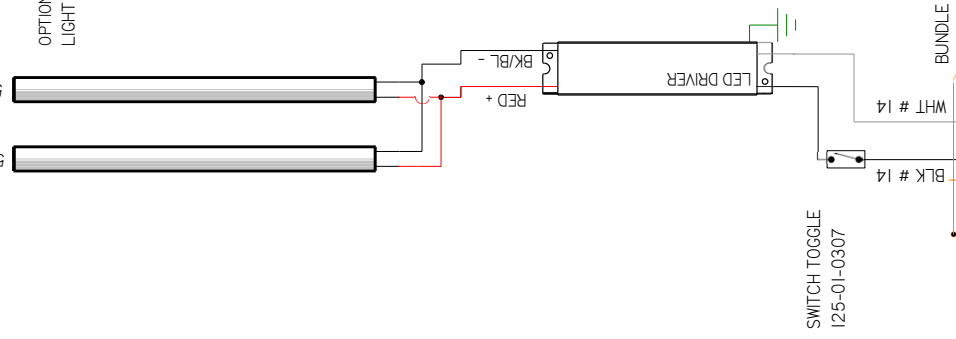

EVAPORATOR FAN MOTOR
.08A 12W @ 120VAC
3172574

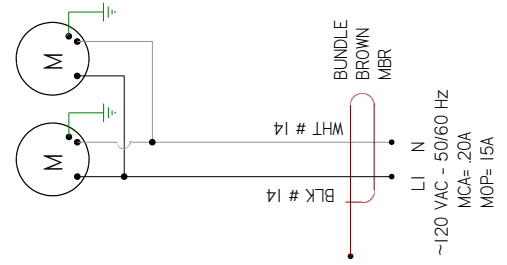


NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

HUSSMANN
DIAGRAM-Q2-SS-5-R

MATERIAL - NA
DATE DRAWN - 8-23-16
DRAWN BY - CRAIG BOOREY
APPROVED BY - CRAIG BOOREY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DIMENSIONS .XX +.03 .XXX
+0.0
ANGLES ± 2°


ECN-CAP-0003236
REF -
SHEET 1 OF 1
THIRD
E
PROJECTION

3013767 | D



CIRCUIT #1	LOADING
120V	
110V	
100V	


SHELF LIGHTS
CANOPY LIGHTS

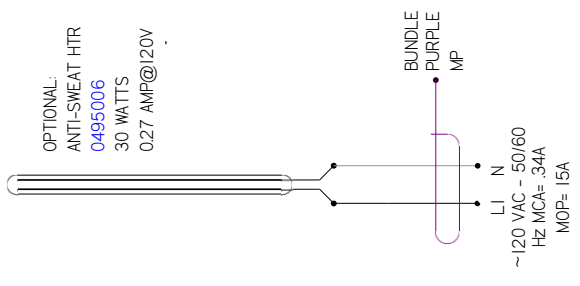

OPTIONAL:
ANTI-SWEAT HTR
0495006
30 WATTS
0.27 AMP@120V


OPTIONAL:
LIGHT CIRCUIT .34A 36.8W @120V

EVAPORATOR FAN MOTOR
.07A 12W @ 120VAC
(3) 3174936



BUNDLE BROWN MBR
WHT # 14
LI N
~120 VAC - 50/60
Hz MCA= .26A
MOP= 15A

SUCTION SOLENOID



BUNDLE WHITE/BLACK
BLACK #14
WHITE #14
N LI
~120 VAC - 50/60
Hz MCA= .18A
MOP= 15A

REV	EN	DATE	REVISION DESCRIPTION	REV BY	CHK BY	APP BY
A	ECN-CAP-0003236	2018/08/23	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-CO-0005276	2022/02/18	NEW LIGHTS	CB	CB	CB
C	ECN-CO-0018444	2023/09/28	CHANGED FANS & LIGHTS	CB	CB	CB


HUSSMANN
DIAGRAM-Q2-SS-6-R

MATERIAL - N/A
DATE DRAWN - 8-23-16
DRAWN BY - CRAIG BOOREY
REVIEWED BY - CRAIG BOOREY
APPROVED BY - CRAIG BOOREY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS XX +.03, .XX
DECIMALS .XX +.03, .XXX
ANGLES ± 2°

ECN-CAP-0003236
REF -
SHEET 1 OF 1
THRU
PROJECTION
E

3013768 | C

NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT




CIRCUIT #1	LOADING
120V	
150V	
180V	
210V	






OPTIONAL:
SHELF LIGHTS 4 LED LIGHT NUA
CANOPY LIGHTS 4 LED LIGHT NUA

OPTIONAL:
LIGHT CIRCUIT .44A 47.2W @120V

LOADING
120
150
180
210

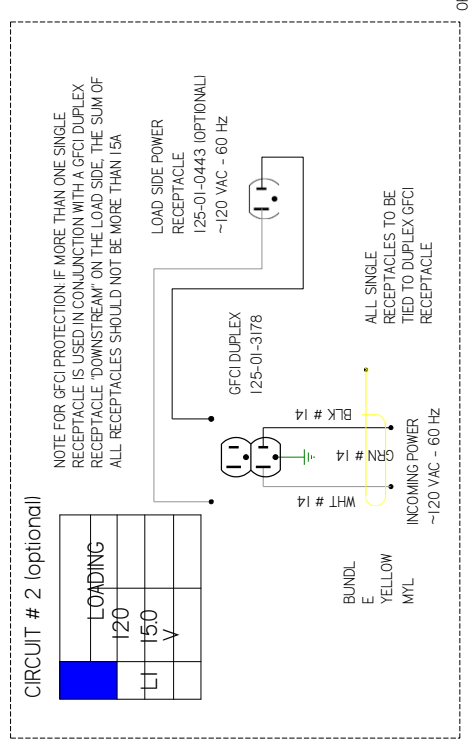


REV	EN	DATE	REVISION DESCRIPTION	REV BY	CHK BY	APP BY
A	ECN-CAP-0003236	2016/08/23	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-CAP-0004846	2018/01/12	ADDED OPTIONAL THERMAL SIMPLE	CB	CB	CB
C	ECN-CO-0005276	2022/02/18	NEW LIGHTS	CB	CB	CB
D	ECN-CO-0008444	2023/09/28	CHANGED FANS & LIGHTS	CB	CB	CB

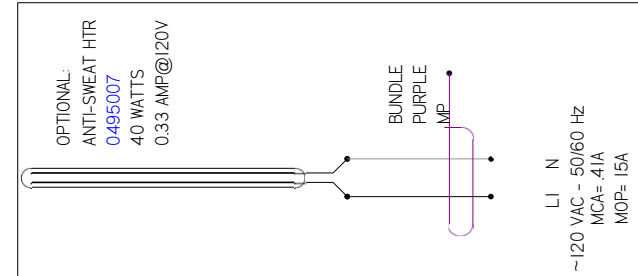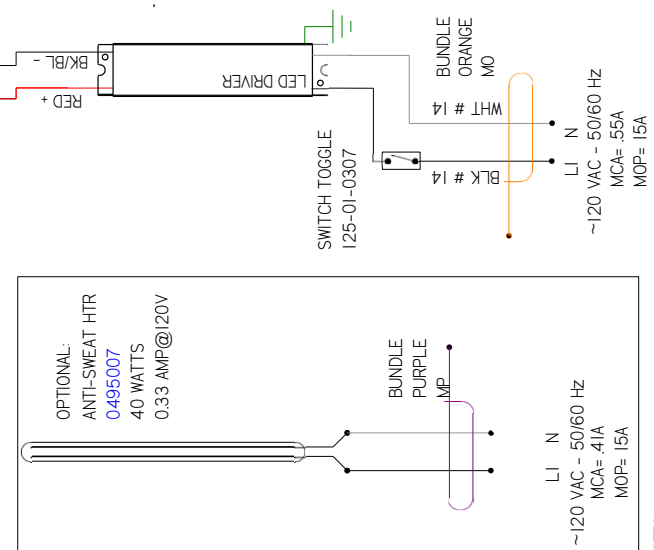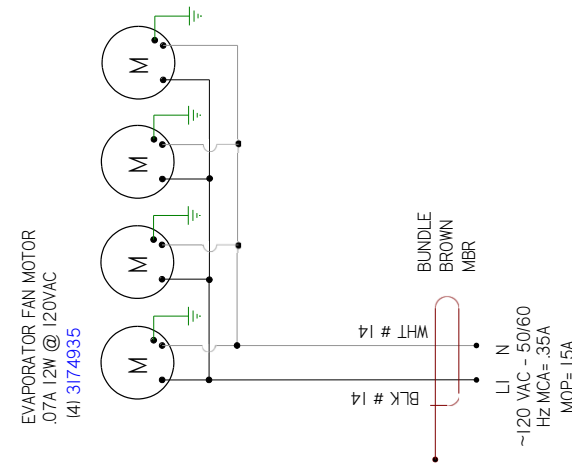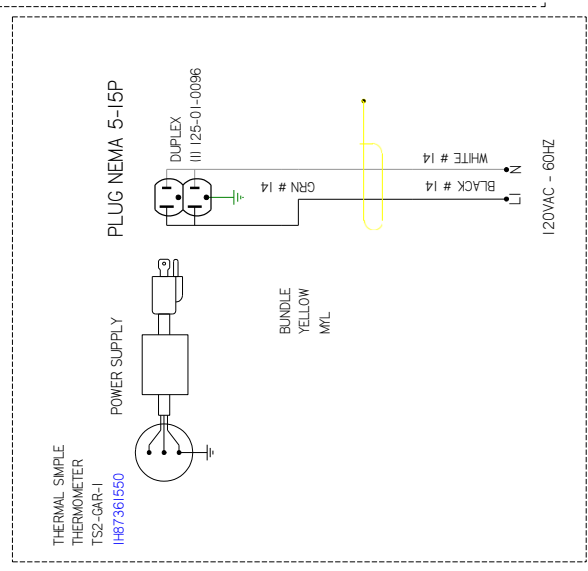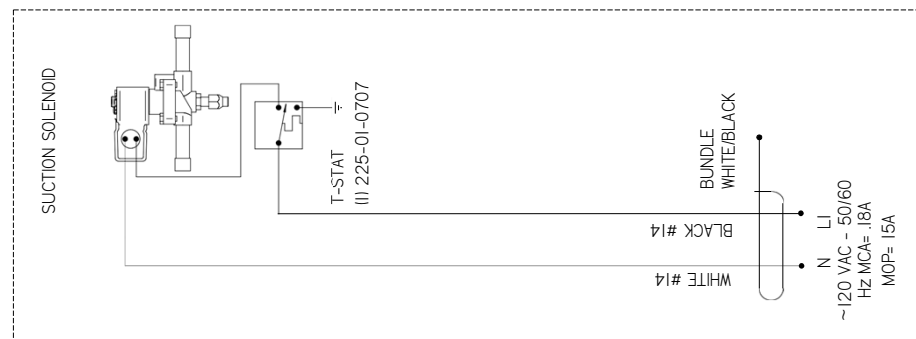

NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

HUSSMANN
DIAGRAM-02-SS-8-R

MATERIAL - N/A
DATE DRAWN - 8-23-16
DRAWN BY - CRAIG BOOREY
ECN-CAP-0003236
REVIEWED BY - CRAIG BOOREY
SHEET 1 OF 1
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FIRST DECIMALS .XX +0.3 .XXX
SECOND DECIMALS .XX +0.3 .XXX
THIRD DECIMALS .XX +0.3 .XXX
ANGLES ± 2°
PROJECTION
E
D



CIRCUIT #1	LOADING
LI	120
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150


CANOPY & SHELF LIGHTS




OPTIONAL: LEDGE LIGHTS




CIRCUIT #2 (optional)	LOADING
LI	120
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150
LI	150

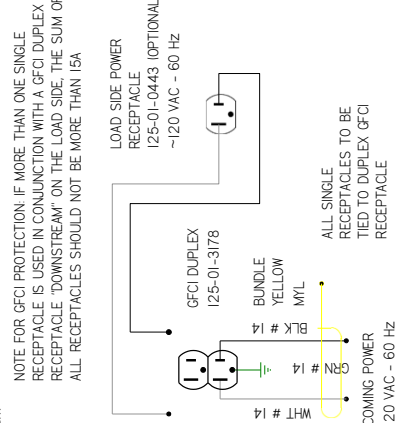


EVAP FAN MOTOR (41 3172574) 12W .06A @ 120VAC

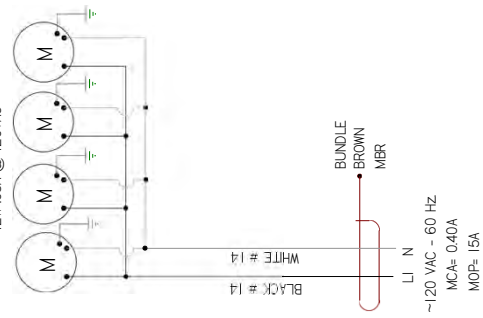


OPTIONAL LIQUID SOLENOID 14A @ 120VAC

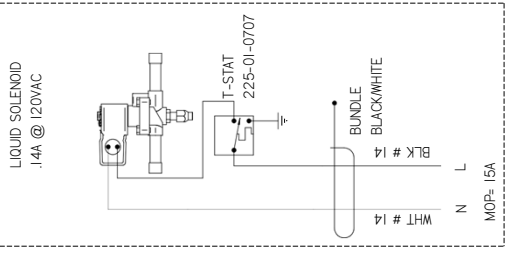

THERMAL SIMPLE THERMOMETER IH87361650



PLUG NEMA 5-15P

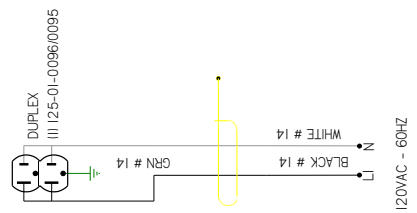

REV	EN	DATE	REVISION DESCRIPTION	REV BY	CHK BY	APPR BY
A	ECN-CAP-0013866	2018/09/02	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-CAP-0014946	2018/11/02	ADDED OPTIONAL THERMAL SIMPLE	CB	CB	CB
C	ECN-CO-0015276	2022/02/18	NEW LIGHTS	CB	CB	CB
D	ECN-CO-0018444	2023/08/28	CHANGED FANS & LIGHTS	CB	CB	CB
E	ECN-CO-0019715	2023/11/01	NEW FAN MOTORS	CB	CB	CB

HUSSMANN
DIAGRAM-QZ-SS-10-R
 MATERIAL - N/A
 DATE DRAWN - 8-2-18
 DRAWN BY - CRAIG BOOREY
 REVIEWED BY - CRAIG BOOREY
 APPROVED BY - CRAIG BOOREY
 REF - SHEET 1 OF 1
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS - AS SHOWN
 DECIMALS .XX +0.3 .XXX
 ANGLES ± 2°
 PROJECTION
3070612 | **E**


NOTES:
 CASE MUST BE GROUNDED
 WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED



CIRCUIT #1	LOADING
120V	
15A	


SHELF LIGHTS
4 LED LIGHT-NUA
4 LED LIGHT-NUA
4 LED LIGHT-NUA

CANOPY LIGHTS
4 LED LIGHT-NUA
4 LED LIGHT-NUA
4 LED LIGHT-NUA

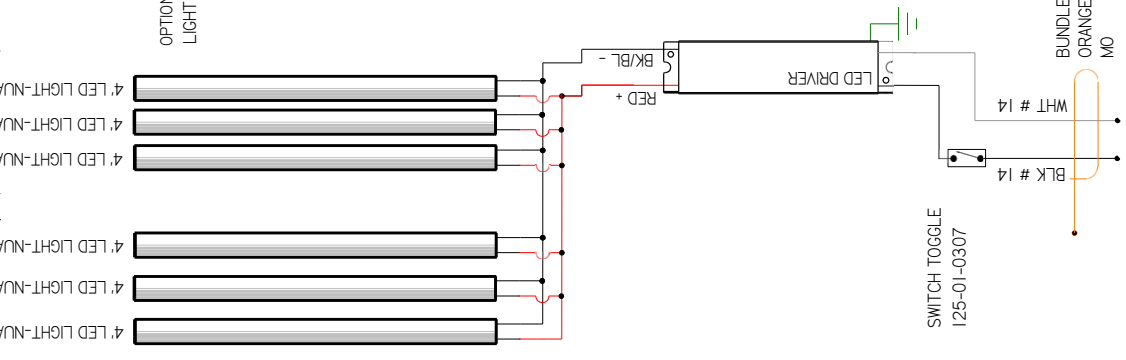


BUNDLE ORANGE MO
WHT #14
LI N
~120 VAC - 50/60
HZ MCA= .82A
MOP= 15A

OPTIONAL:
ANTI-SWEAT HTR
0495008
60 WATTS
0.50 AMP@120V

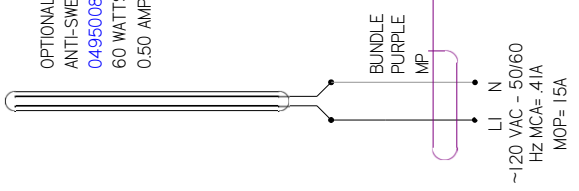

BUNDLE PURPLE MP
LI N
~120 VAC - 50/60
HZ MCA= 41A
MOP= 15A


OPTIONAL:
LIGHT CIRCUIT .66A 70.8W @120V

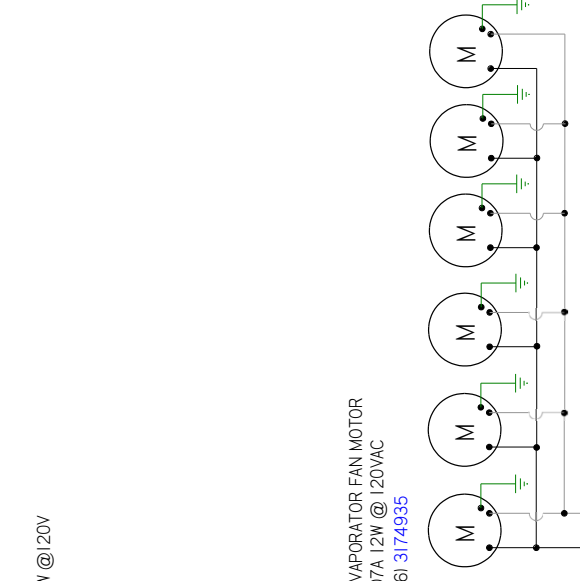

EVAPORATOR FAN MOTOR
.07A 12W @120VAC
(6) 3174935

BUNDLE BROWN MBR
WHT #14
LI N
~120 VAC - 50/60
HZ MCA= .53A
MOP= 15A

SUCTION SOLENOID



BUNDLE WHITE/BLACK
BLK #14
LI N
~120 VAC - 50/60
HZ MCA= .18A
MOP= 15A

REVISION HISTORY			
REV	ECN	DATE	DESCRIPTION
A	ECN-CAP-0003236	2018/08/23	RELEASED TO PRODUCTION
B	ECN-CO-0005276	2022/02/18	NEW LIGHTS
C	ECN-CO-0018444	2023/09/28	CHANGED FANS & LIGHTS


REV BY	CHKD BY	APPR BY
CB	CB	CB
CB	CB	CB
CB	CB	CB

HUSSMANN
DIAGRAM-QZ-SS-12-R

MATERIAL - N/A
DATE DRAWN - 8-23-16
DRAWN BY - CRAIG BOOREY
REVIEWED BY - CRAIG BOOREY
APPROVED BY - CRAIG BOOREY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS .XX
DECIMALS .XX +03 .XXX
+0.0

ECN-CAP-0003236
REF -
SHEET 1 OF 1
THRU
E
PROJECTION

3013770 | C



NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

CIRCUIT #1

120V			
120V			
120V			
120V			

LIGHT CIRCUIT= 0.16A 175W



CANOPIE & SHELF LIGHTS



OPTIONAL LEDGE LIGHTS



EVAP FAN MOTOR (2) 0477653 4W 12A @ 120VAC

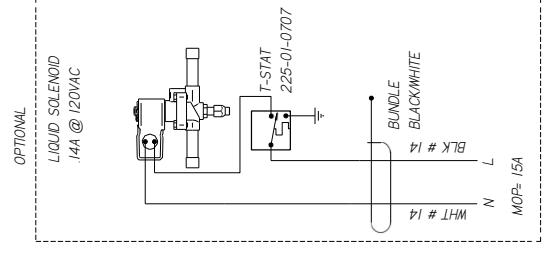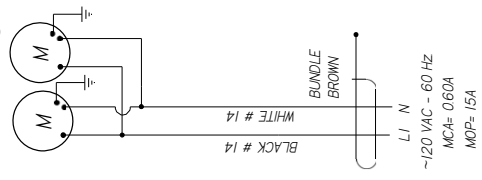

REVISION HISTORY		REV BY	CHKD BY	APPR BY
1	EON-CAP-0013866	CS	CS	CS
REVISION DESCRIPTION		RELEASED TO PRODUCTION		
DATE	20180802			

HUSSMANN
DIAGRAM-QZ-SS-
22.50-R

MATERIAL - IVA
DATE DRAWN - 8-2-18
DRAWN BY - CRAIG ROOREY
REVIEWED BY - CRAIG ROOREY
APPROVED BY - CRAIG ROOREY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS XX ± 0.3, XXX ± 0.10
DECIMALS XX ± 0.3, XXX ± 0.10
ANGLES ± 2°

REF - EON-CAP-0013866
SHEET 1 OF 3
THIRD ANGLE PROJECTION

3070795 | A





NOTES:
CASE MUST BE GROUNDED
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

CIRCUIT #1
LOADING

120V			
11-0-23			

LIGHT CIRCUIT= 0.11A 123W
SHELF LIGHTS CANDY LIGHTS

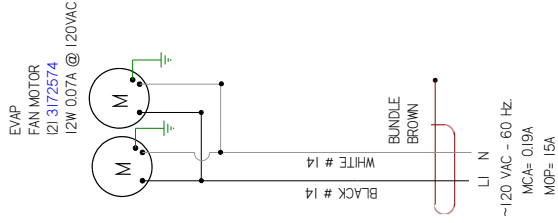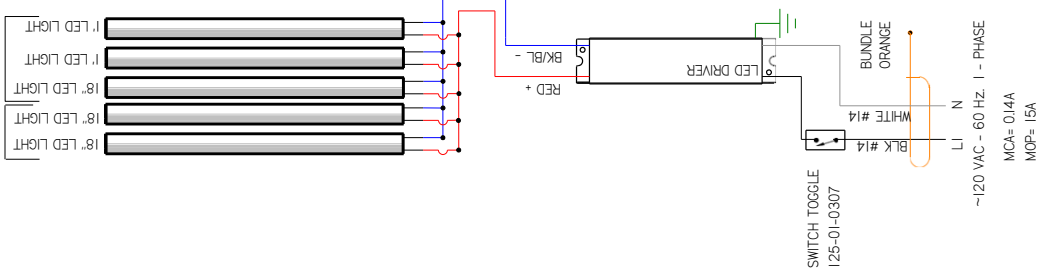

REVISION HISTORY			
REV	ECN	DATE	REVISION DESCRIPTION
B	ECN-COD-0018444	8-28-23	CHANGED EVAP FAN
C	ECN-COD-0018715	11-1-23	NEW FAN MOTORS

REVISION HISTORY			
REV BY	CHKD BY	APPR BY	
CB	CB	CB	CB
CB	CB	CB	CB

WIRE MARKER COLORS/ABBREVIATIONS	
BLACK = MBK	MAROON =
BLUE = MBL	MNR ORANGE =
BROWN = MBR	MO PINK = MPI
DARK BLUE =	PURPLE = MP
DBG GREEN = MG	RED = MR
LIGHT BLUE =	YELLOW = MYL

UL COLOR CODES / ABBREVIATIONS	
RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
YELLOW =	ORANGE =
YL GRAY =	OR VIOLET =
GY	VT


FACTORY 14GA WIRE
_FACTORY 10GA WIRE
_FIELD WIRE
DO NOT SCALE DRAWING
SHEET 1 OF 1

HUSSMANN
DIAGRAM-Q2-SSN-900R
3155229
REV C

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING. ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
A	ECN-COD-0011328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-COD-0018444	8-28	CHANGED EVAP FAN	CB	CB	CB

CIRCUIT #1	LOADING
120W	
140W	

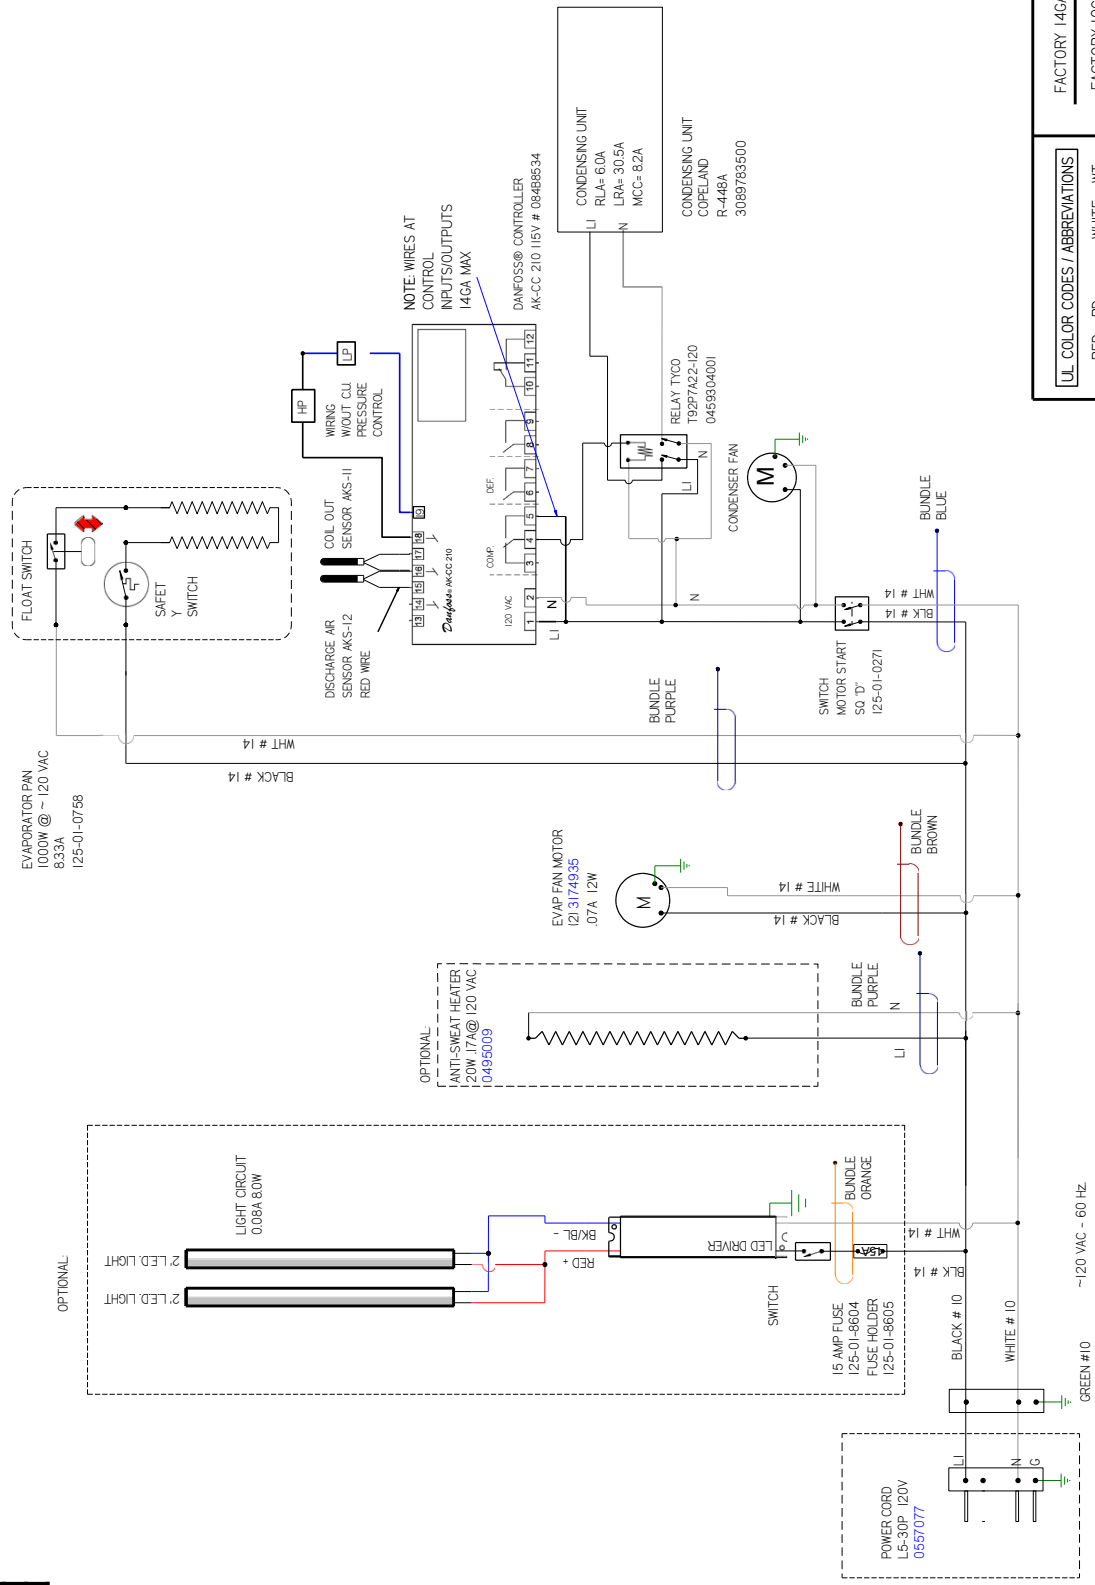

HUSSMANN
DIAGRAM-Q2-SS-2S

FACTORY 14GA WIRE
 _FACTORY LOGGA WIRE
 --- FIELD WIRE
 --- DO NOT SCALE DRAWING

UL COLOR CODES / ABBREVIATIONS
 RED = RD
 BLACK = BK
 BLUE = BL
 YELLOW = YL
 GRAY = GR
 WHITE = WT
 GREEN = GN
 BROWN = BN
 ORANGE = OR
 OR VIOLET = VT
 CY


DO NOT SCALE DRAWING
 SHEET 1 OF 1

3126632
 B

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

CIRCUIT #1			
LOADING			
120V			
150			

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
A	ECN-COD-0011328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-COD-0016444	8-28-23	CHANGED EVAP FAN	CB	CB	CB

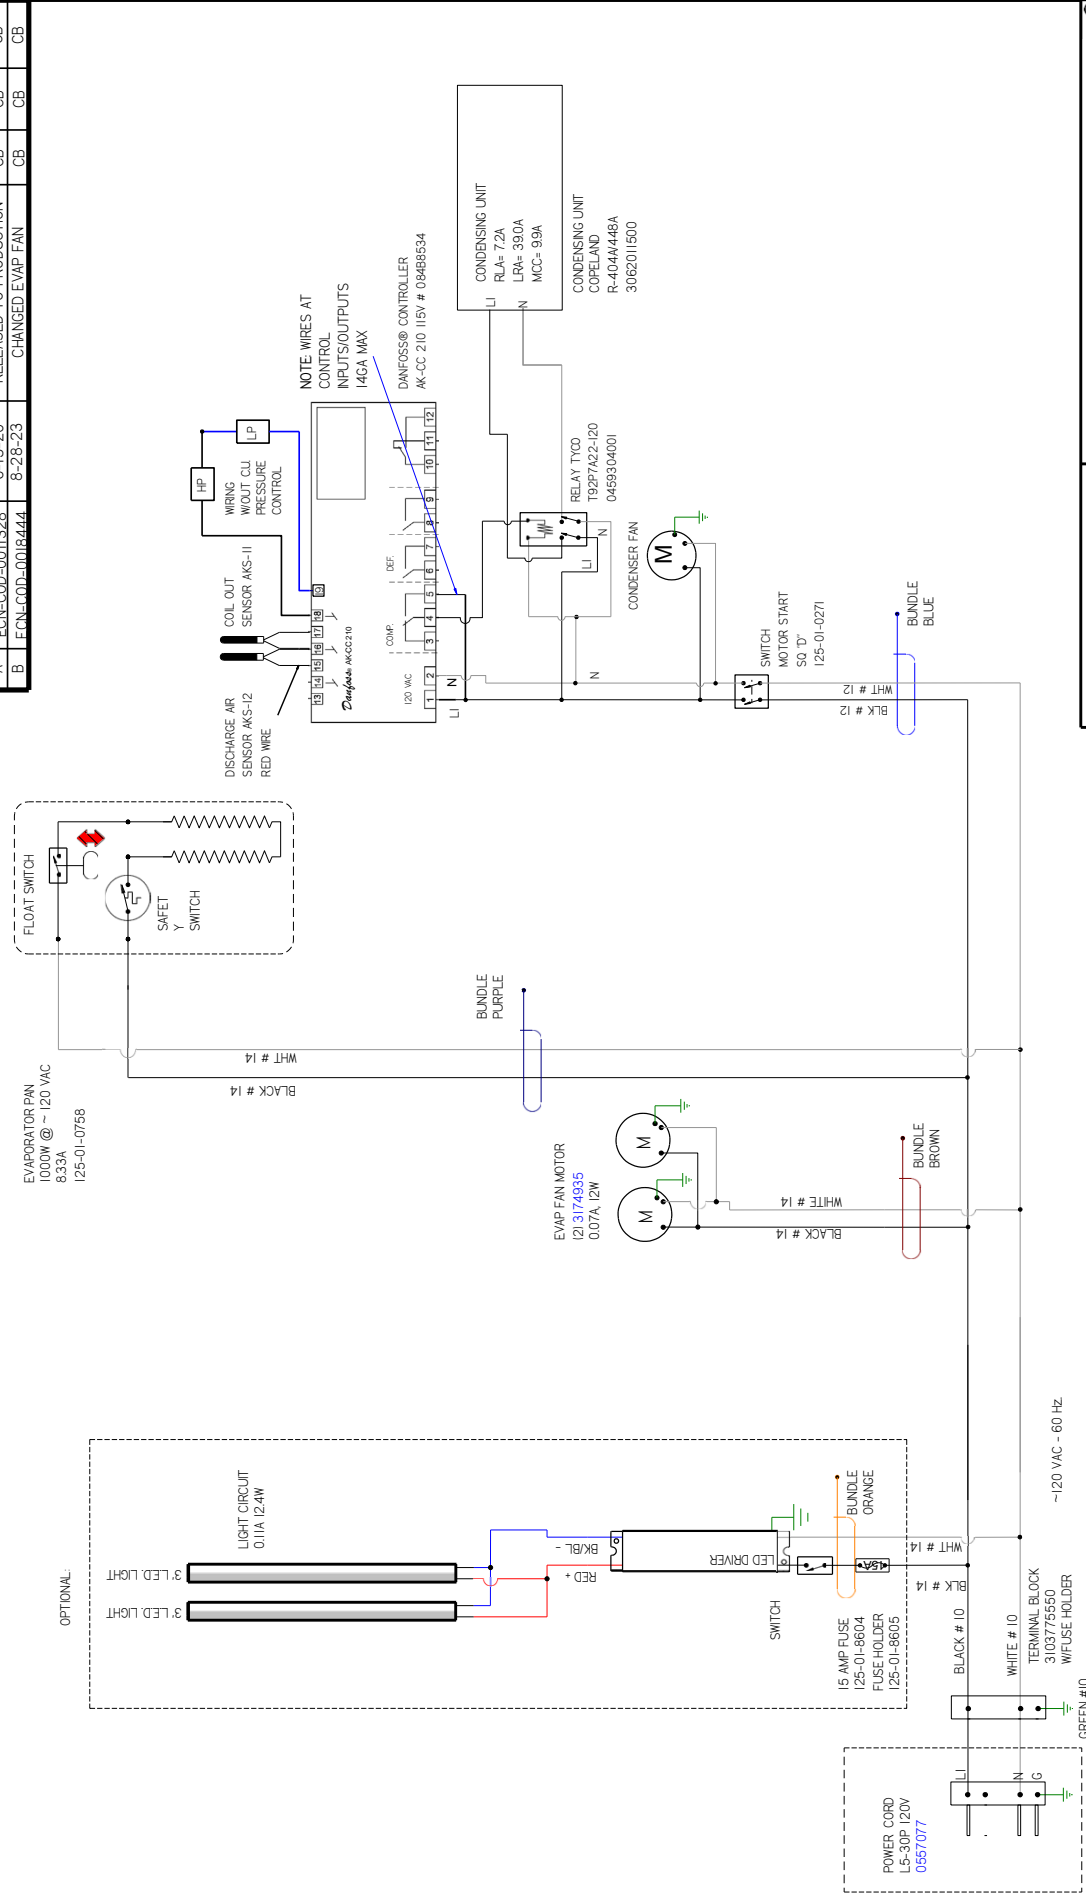

HUSSMANN®
DIAGRAM-Q2-SS-3S

FACTORY 14GA WIRE
 _FACTORY LOGGA WIRE
 _ _ _ _ FIELD WIRE
 - - - - - DO NOT SCALE DRAWING

UL COLOR CODES / ABBREVIATIONS
 RED = RD WHITE = WT
 BLACK = BK GREEN = GN
 BLUE = BL BROWN = BN
 YELLOW = YL ORANGE = O
 GRAY = GR OR VIOLET = VT
 CY

DO NOT SCALE DRAWING
 SHEET 1 OF 1


3126633
 B

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
A	ECN-COD-0011328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	FCN-COD-0018444	8-28-23	CHANGED EVAP FANS	CB	CB	CB

CIRCUIT # 1	
LOADING	208-240 V
L1	14:3 16:5
L2	13:5 15:6

REVISION HISTORY						
REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
A	ECN-COD-0011328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	FCN-COD-0018444	8-28-23	CHANGED EVAP FANS	CB	CB	CB

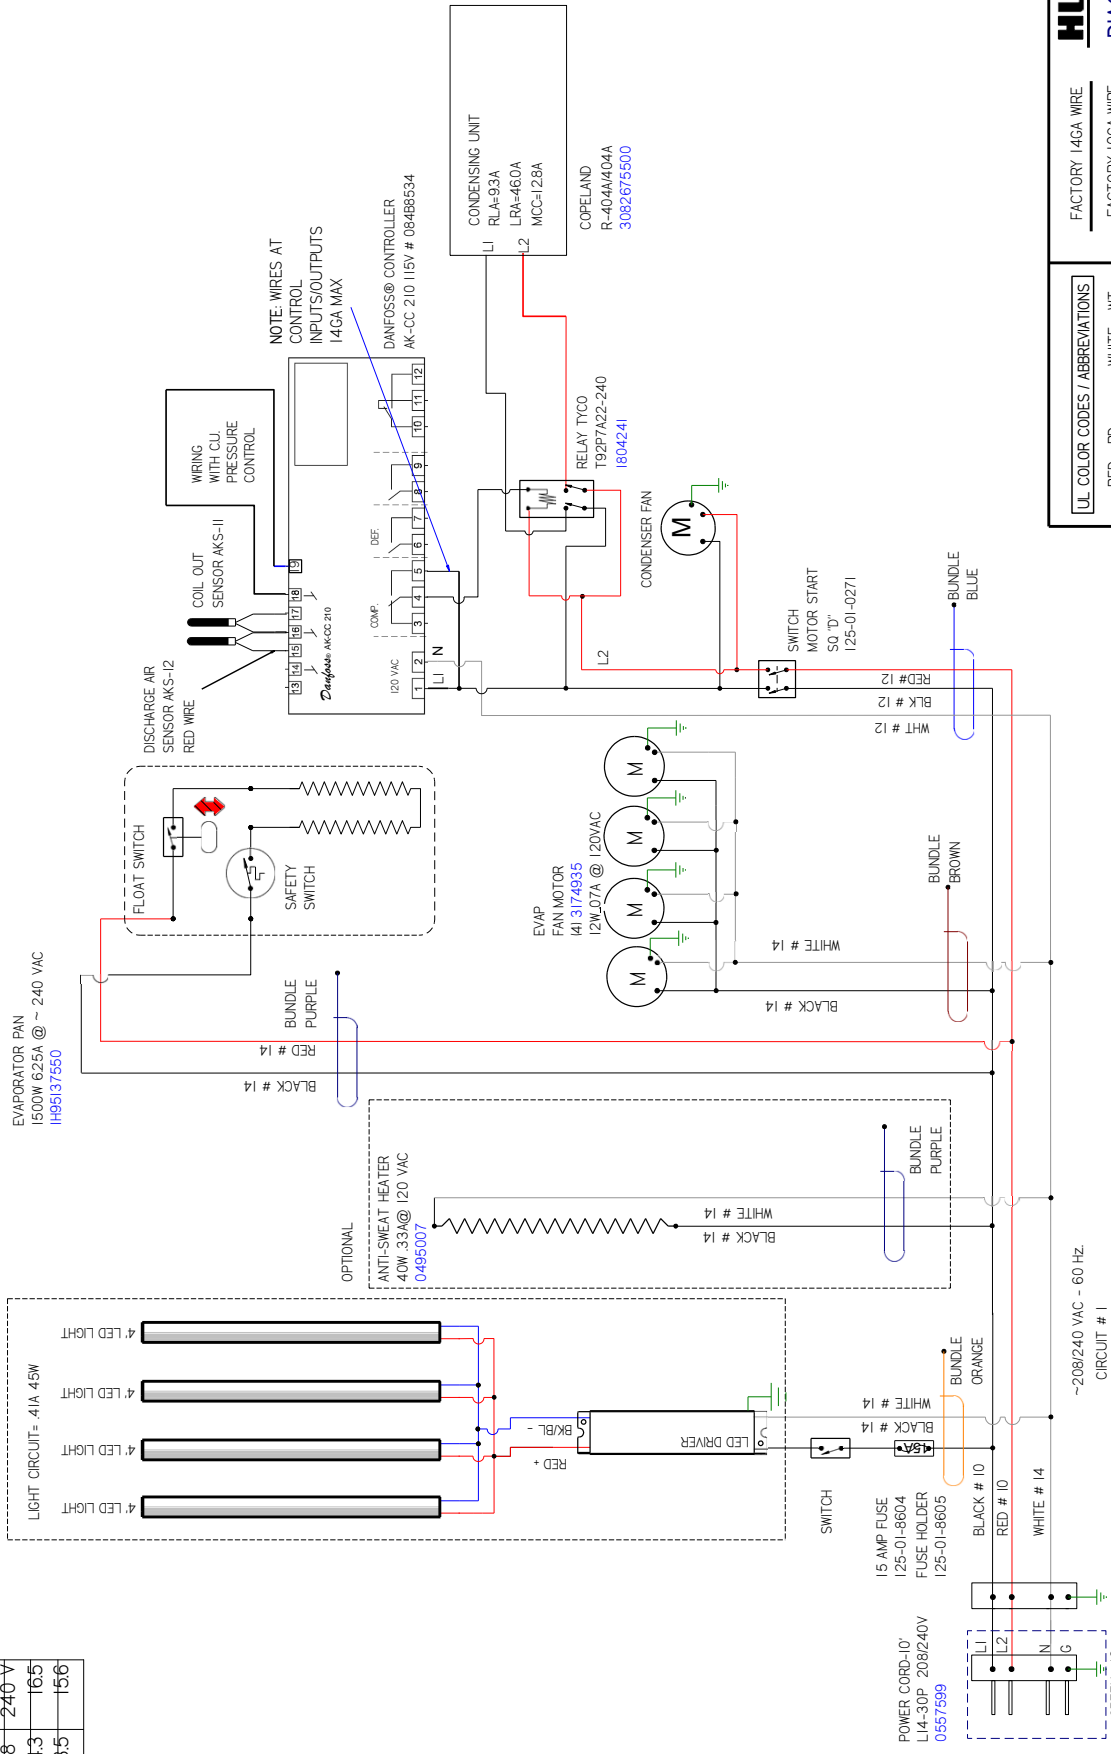

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE.
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS. MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED.

HUSSMANN
DIAGRAM-Q2-SS-8S
 DO NOT SCALE DRAWING
 SHEET 1 OF 1

UL COLOR CODES / ABBREVIATIONS

- WHITE = WT
- GREEN = GN
- BROWN = BN
- ORANGE = OR
- OR VIOLET = VT
- RED = RD
- BLACK = BK
- BLUE = BL
- YELLOW = YL
- GRAY = GR


FACTORY 14GA WIRE
 _FACTORY 10GA WIRE
 _FIELD WIRE
 _DO NOT SCALE DRAWING

3126638
 B

CIRCUIT #1
LOADING

120V	
147	

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
B	ECN-COD-0015256	03-04-22	NEW LIGHTS	AL	CB	CB
C	ECN-COD-0016444	8-28-23	CHANGED FAN & LIGHTS	CB	CB	CB

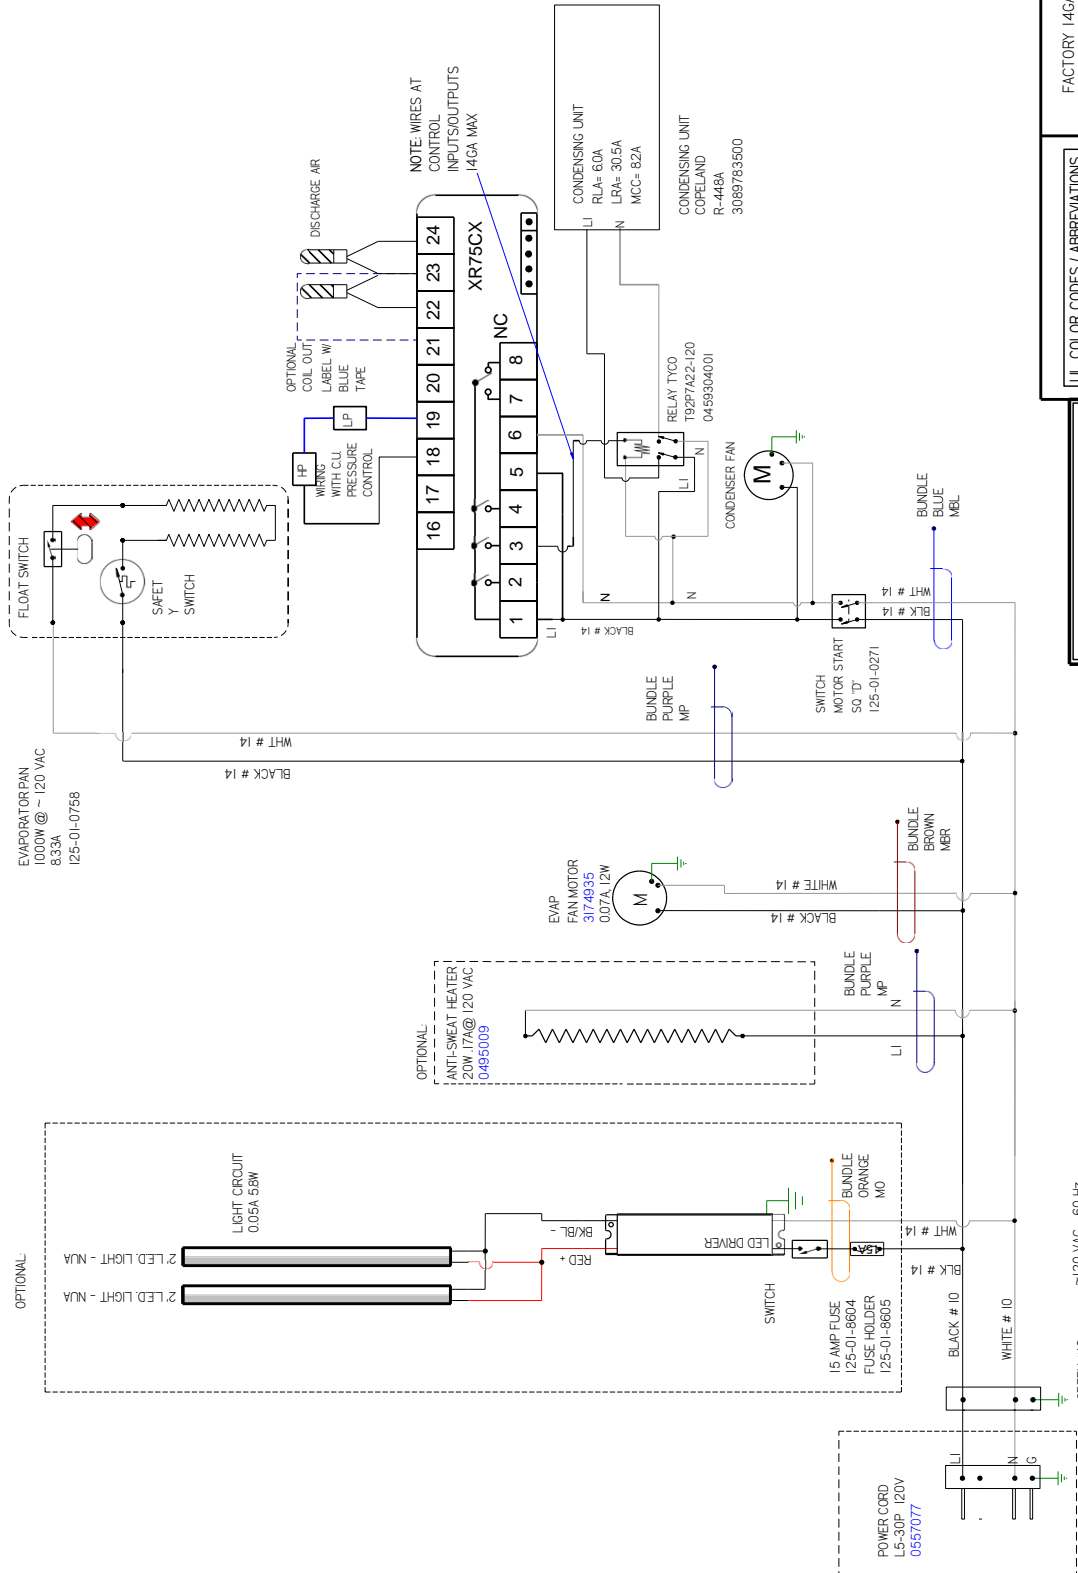

UL COLOR CODES / ABBREVIATIONS

RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
YELLOW = YL	ORANGE = OR
GRAY = GR	OR VIOLET = OV

WIRE MARKER COLORS/ABBREVIATIONS

BLACK = MBK	MAROON = MR
BLUE = MBL	MMR ORANGE = MO
BROWN = MBR	MO PINK = MPI
DARK BLUE = MDB	PURPLE = MP
MDB GREEN = MGG	RED = MR
LIGHT BLUE = MBL	YELLOW = MYL

NOTES:
 1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED


HUSSMANN
 DIAGRAM-Q2-SS-2-
 S WXR75 CTRL

3157126
 SHEET 1 OF 1

FACTORY 14GA WIRE
 _FACTORY LOGGA WIRE
 _ _ _ _ _ FIELD WIRE
 DO NOT SCALE DRAWING

REVISION HISTORY			
REV	ECN	DATE	REVISION DESCRIPTION
B	ECN-COD-0014506	10-21-21	LABELLED COIL OUT SENSOR
C	ECN-COD-0015256	3-4-22	NEW LIGHTS
D	ECN-COD-0018448	9-25-23	CHANGED FANS & LIGHTS

CIRCUIT #1 LOADING	
120V	
208V	

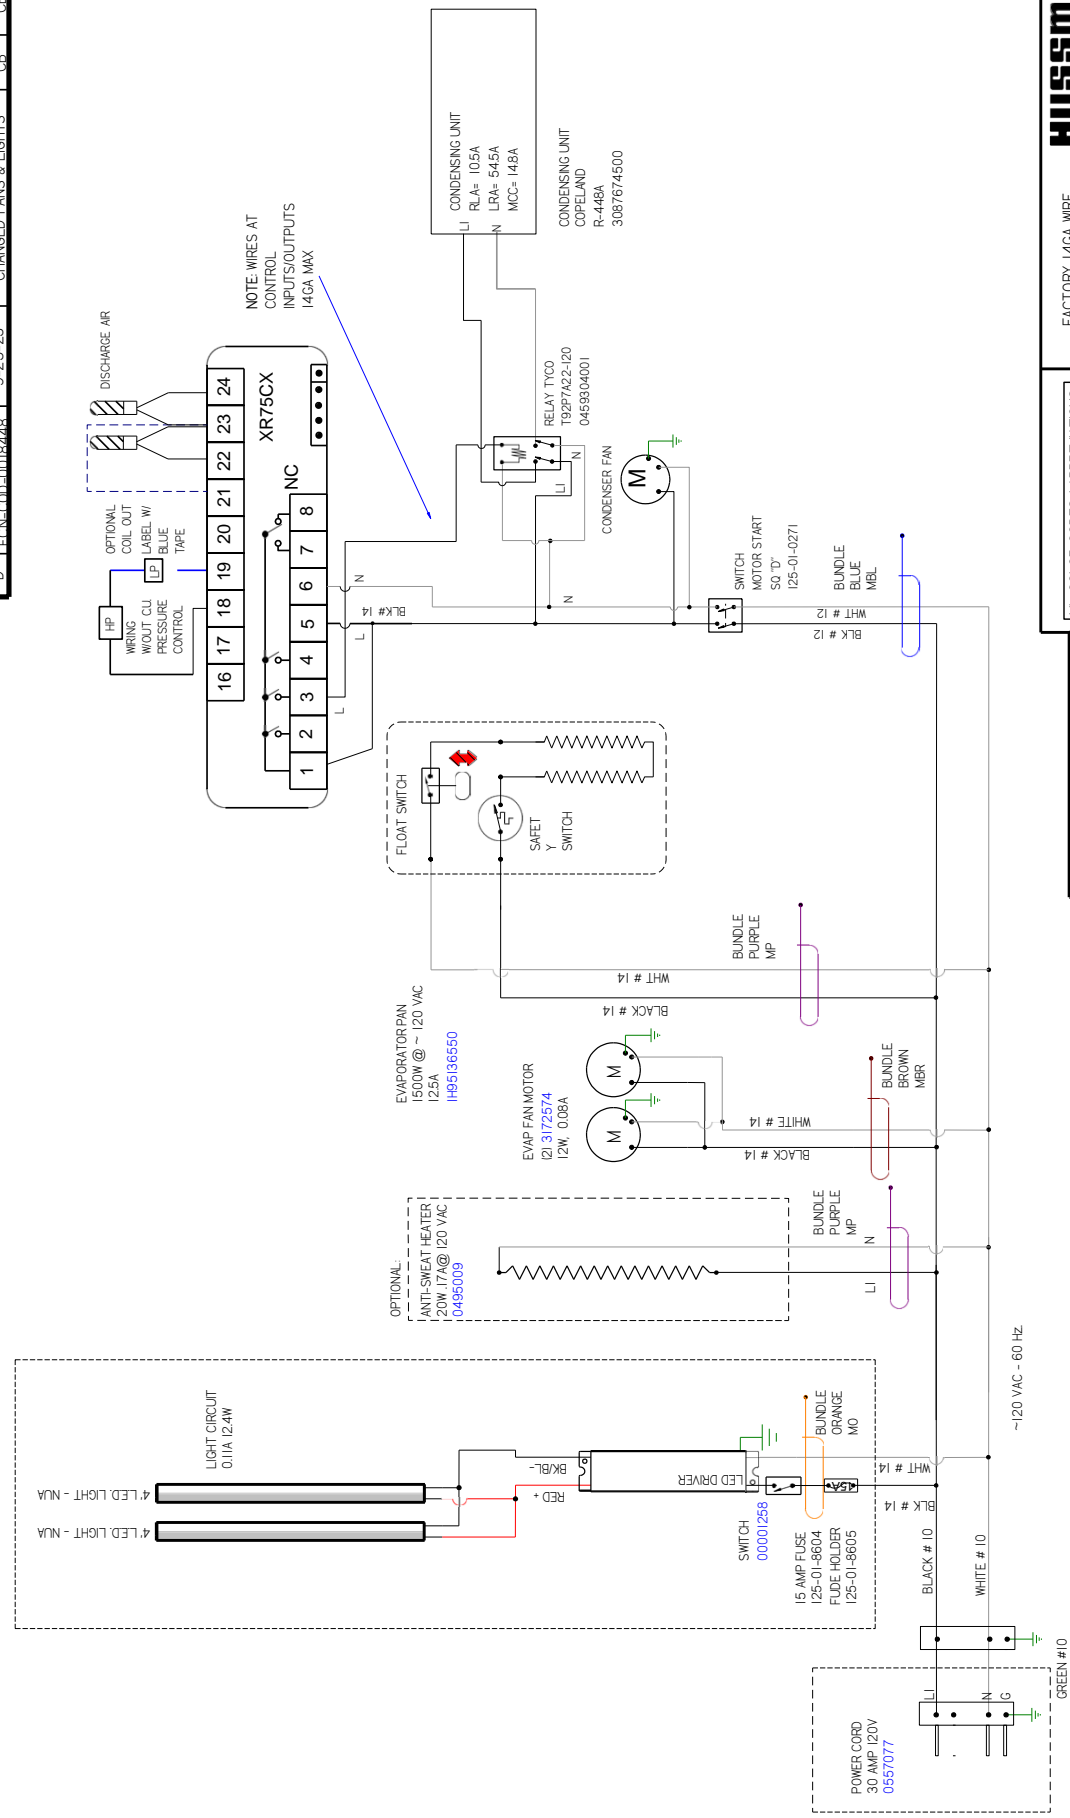

UL COLOR CODES / ABBREVIATIONS	
RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
YELLOW = YL	ORANGE = OR
GRAY = GR	OR VIOLET = VT

WIRE MARKER COLORS/ABBREVIATIONS	
BLACK = MBK	MAROON =
BLUE = MBL	MNR ORANGE =
BROWN = MBR	MO PINK = MPI
DARK BLUE =	PURPLE = MP
DBG GREEN = MG	RED = MR
LIGHT BLUE =	YELLOW = MYL

UL COLOR CODES / ABBREVIATIONS	
FACTORY 14GA WIRE	FACTORY 10GA WIRE
FIELD WIRE	FIELD WIRE

DO NOT SCALE DRAWING	
SHEET 1 OF 1	

HUSSMANN
DIAGRAM-Q3-SS-4S WXR75 CTRL
3156674
D


NOTES:
 1. PRINTED DOCUMENT REQUIRED SETTING. ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

CIRCUIT # 1

LOADING	208	240 V
L1	13.9	16.1
L2	13.2	15.3

NOTE: CASE MUST BE GROUNDED

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
D	ECN-COD-0016096	6-23-22	CHANGED RELAY	CB	CB	CB
E	ECN-COD-0018444	9-25-23	CHANGED FANS & LIGHTS	CB	CB	CB

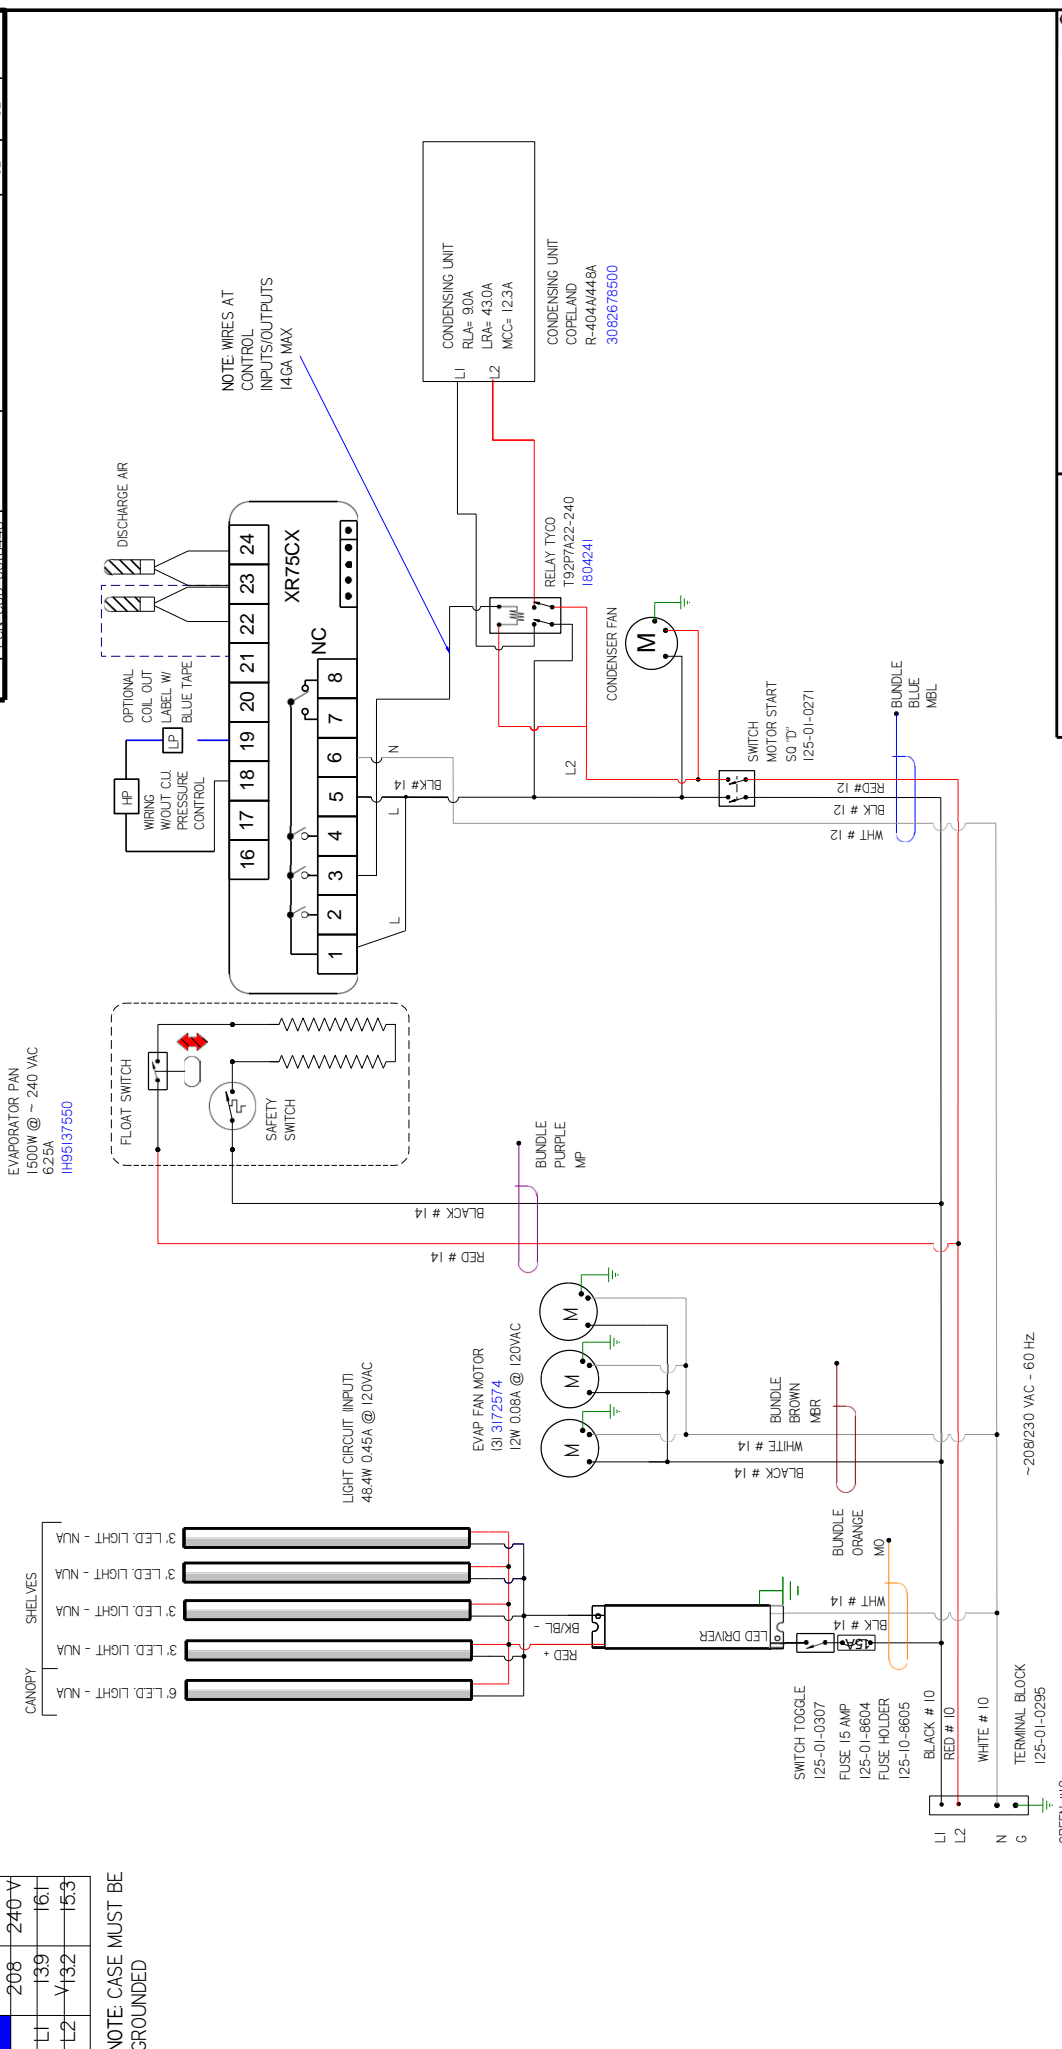

HUSSMANN
DIAGRAM-Q3-SS-6S WXR75 CTLR
3157153


FACTORY 14GA WIRE
 _FACTORY LOGGA WIRE
 _FIELD WIRE
 _DO NOT SCALE DRAWING
 SHEET 1 OF 1

UL COLOR CODES / ABBREVIATIONS	WIRE MARKER COLORS/ABBREVIATIONS
RED = RD	MAROON =
BLACK = BK	BLACK = MBK
BLUE = BL	BLUE = MBL
YELLOW = YL	BROWN = MBR
OR VIOLET = VT	DARK BLUE =
	MDB GREEN = MG
	LIGHT BLUE =
	WHITE = WT
	GREEN = GN
	BROWN = BN
	ORANGE =
	PURPLE = MP
	RED = MR
	YELLOW = MYL

NOTES:
 1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
D	ECN-COD-00160893	6-7-22	REVISED RELAY WIRING	CB	CB	CB
E	ECN-COD-00160898	6-23-22	CHANGED RELAY	CB	CB	CB
F	ECN-COD-00184448	9-26-23	CHANGED FANS & LIGHTS	CB	CB	CB

CIRCUIT #1	208V	240V
LOADING	143	165
	185	190

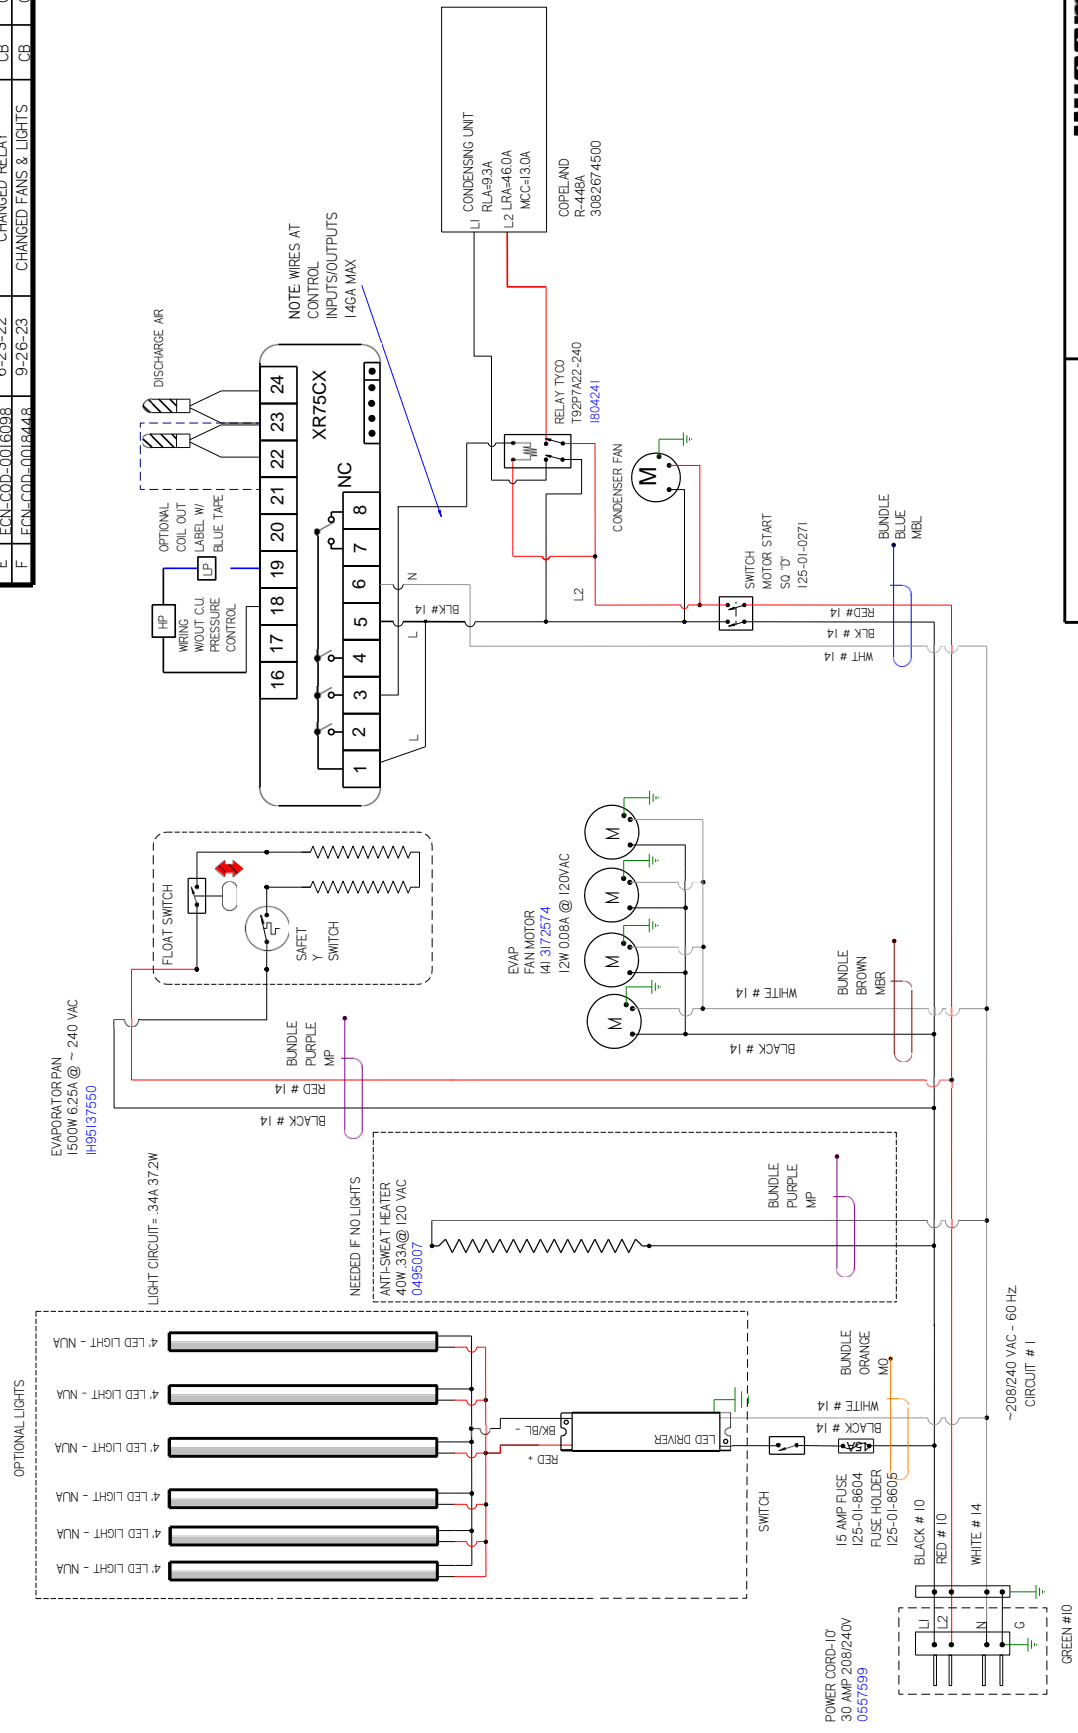

UL COLOR CODES / ABBREVIATIONS	
RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
YELLOW = YL	ORANGE = OR
GRAY = GR	OR VIOLET = OV
	VT

WIRE MARKER COLORS/ABBREVIATIONS	
MAROON = MK	
MNR ORANGE = NO	
M0 PINK = MP	
DARK BLUE = DB	
MDB GREEN = MG	
LIGHT BLUE = LB	
M0 PURPLE = MP	
RED = MR	
YELLOW = MYL	

FACTORY 14GA WIRE
FACTORY LOGA WIRE
FIELD WIRE

DO NOT SCALE DRAWING
SHEET 1 OF 1

HUSSMANN
DIAGRAM-Q3-SS-8-
S WXR75 CTLR
3156422

- NOTES:
 1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
 2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
 3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

11. User Information

Stocking

Improper temperature and lighting will cause serious product loss. Discoloration, dehydration and spoilage can be controlled with proper use of the equipment and handling of product. Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product. Hussmann cases were not designed to “heat up” or “cool down” product - but rather to maintain an item’s proper temperature for maximum shelf life. To achieve the protection required always:

1. Minimize processing time to avoid damaging temperature rise to the product. Product should be at proper temperature.
2. Keep the air in and around the case area free of foreign gasses and fumes or food will rapidly deteriorate.
3. Maintain the display merchandisers temperature controls as outlined in the refrigerator section of this manual.
4. Do not place any product into these refrigerators until all controls have been adjusted and they are operating at the proper temperature. Allow merchandiser to operate a minimum of one (1) hour before stocking with any product.
5. When stocking, never allow the product to extend beyond the recommended load limit. Air discharge and return air flow must be unobstructed at all times to provide proper refrigeration.
6. Avoid the use of supplemental flood or spot lighting. Display light intensity has been designed for maximum visibility and product life at the factory. The use of higher output fluorescent lamps (H.O. and V.H.O.), will shorten the shelf life of the product.

Case Cleaning

Long life and satisfactory performance of any equipment are dependent upon the care given to it. To insure long life, proper sanitation and minimum maintenance costs, the refrigerator should be thoroughly cleaned frequently. SHUT OFF FAN DURING CLEANING PROCESS. It can be unplugged within the case, or shut off entire case at the source. The interior bottom may be cleaned with any domestic soap or detergent based cleaners. Sanitizing solutions will not harm the interior bottom, however, these solutions should always be used according to the Hussmann’s directions. It is essential to establish and regulate cleaning procedures. This will minimize bacteria causing discoloration which leads to degraded product appearance and significantly shortening product shelf life.

Soap and hot water are not enough to kill this bacteria. A

sanitizing solution must be included with each cleaning process to eliminate this bacteria.

1. Scrub thoroughly, cleaning all surfaces, with soap and hot water.
2. Rinse with hot water, but do not flood.
3. Apply the sanitizing solution according to Hussmann’s directions.
4. Rinse thoroughly.
5. Dry completely before resuming operation.

Cleaning Glass and Mirrors

Only use a soft cloth and mild glass cleaner for cleaning any glass or mirrored components. Be sure to rinse and/or dry completely.

Never use hot water on cold glass surfaces! It may shatter and cause serious injury! Allow glass surfaces to warm first.

Non-Glare Glass

The high optical clarity of this glass is possible due to special coatings on the glass surface itself. To preserve this coating and the optical clarity, keep the glass clean.

Water is the only solution recommended for use in cleaning non-glare glass. The damage to the glass from improper, caustic solutions is irreparable.

In addition to cleaning the glass with the recommended product, there are precautions that should be taken when working and cleaning the inside of the case.

- When cleaning the inside of the cases, we recommend that the glass be fully opened and covered to prevent solutions from splashing onto the glass and ruining the coating on the inside.

Plexiglass and Acrylic Care

Improper cleaning not only accelerates the cleaning cycle but also degrades the quality of this surface. Normal daily buffing motions can generate static cling attracting dust to the surface. Incorrect cleaning agents or cleaning cloths can cause micro scratching of the surface, causing the plastic to haze over time.

Cleaning

Hussmann recommends using a clean damp chamois, or a paper towel marked as “dust and abrasive free” with **210® Plastic Cleaner and Polish** available by calling Sumner Labs at **1-800-542-8656**. Hard, rough cloths or paper towels will scratch the acrylic and should not be used.

Antistatic Coatings

The **210®** has proven to be very effective in not only cleaning and polishing the Plexiglass surface, but also providing antistatic and anti-fog capabilities. This product also seals pores and provides a protective coating.

12. Maintenance



IMPORTANT INFORMATION

Please read these instructions completely before beginning case installation



DANGER

BEFORE SERVICING

Always Disconnect Electrical Power at the Main Disconnect when servicing or replacing any electrical component.

This includes (but not limited to) Fans, Heaters, Thermostats, and Lights.

Evaporator Fans

The evaporator fans are located at the center front of these merchandisers directly beneath the display pans. *Should fans or blades need servicing, always replace fan blades with the raised embossed side of the blade TOWARD THE MOTOR.*

Copper Coils

The copper coils used in Hussmann merchandisers may be repaired in the field. Materials are available from local refrigeration wholesalers.

Hussmann recommends using #15 Sil-Fos for repairs.

Tips and Troubleshooting

Before calling for service, check the following:

1. Check electrical power supply to the equipment for connection.
2. Check fixture loading. Overstocking case will affect its proper operation.
3. If frost is collecting on fixture and/or product, check that Humidity Control is working properly, and that no outside doors or windows are open - allowing moisture to enter store.

CAUTION

CLEANING PRECAUTIONS

When cleaning:

- Do not use high pressure water hoses
- Do not introduce water faster than waste outlet can drain
- NEVER INTRODUCE WATER ON SELF CONTAINED UNIT WITH AN EVAPORATOR PAN
- NEVER USE A CLEANING OR SANITIZING SOLUTION THAT HAS AN OIL BASE (these will dissolve the butyl sealants) or an AMMONIA BASE (this will corrode the copper components of the case)
- TO PRESERVE THE ATTRACTIVE FINISH:
- DO USE WATER AND A MILD DETERGENT FOR THE EXTERIOR ONLY
- DO NOT USE A CHLORINATED CLEANER ON ANY SURFACE
- DO NOT USE ABRASIVES OR STEEL WOOL SCOURING PADS (these will mar the finish)

Glass Replacement and Adjustment Instructions

In order to replace or adjust the glass, the glass must be placed in the raised position. The underside of the clamp is exposed, revealing the tightening screws. By turning these screws counterclockwise 1/4 turn each, the glass will be loosened for either removal or adjustment.

Note: Do not overtighten the screws since damage may occur.

Maintenance (Cont'd)

Stainless Steel Cleaning and Care

There are three basic things, which can break down your stainless steel's passivity layer and allow corrosion.

1. Mechanical Abrasion

Mechanical Abrasion means those things that will scratch the steel's surface. Steel Pads, wire Brushes, and Scrapers are prime examples.

2. Water

Water comes out of our tap in varying degrees of hardness. Depending on what part of the country you live in, you may have hard or soft water. Hard water may leave spots. Also, when heated, hard water leaves deposits behind that if left to sit, will break down the passive layer and rust your stainless steel. Other deposits from food preparation and service must be properly removed.

3. Chlorides

Chlorides are found nearly everywhere. They are in water, food and table salt. One of the worst perpetrators of chlorides can come from household and industrial cleaners.

Don't Despair! Here are a few steps that can help prevent stainless steel rust.

1. Use the Proper Tools

When cleaning your stainless steel products, take care to use non-abrasive tools. Soft Clothes and plastic scouring pads will NOT harm the steel's passive layer. Stainless steel pads can also be used but the scrubbing motion must be in the same direction of the manufacturer's polishing marks.

2. Clean With the Polish Lines

Some stainless steels come with visible polishing lines or "grain". When visible lines are present, you should ALWAYS scrub in a motion that is parallel to them. When the grain cannot be seen, play it safe and use a soft cloth or plastic scouring pad.

3. Use Alkaline, Alkaline Chlorinated or Non-chloride Containing Cleaners

While many traditional cleaners are loaded with chlorides, the industry is providing an ever increasing choice of non-chloride cleaners. If you are not sure of your cleaner's chloride content contact your cleaner supplier. If they tell you that your present cleaner contains chlorides, ask for an alternative. Also, avoid cleaners containing quaternary salts as they also can attack stainless steel & cause pitting and rusting.

4. Treat your Water

Though this is not always practical, softening hard water can do much to reduce deposits. There are certain filters that can be installed to remove distasteful and corrosive elements. Salts in a properly maintained water softener are your friends.

If you are not sure of the proper water treatment, call a treatment specialist.

5. Keep your Food Equipment Clean

Use alkaline, alkaline chlorinated or non-chlorinated cleaners at recommended strength. Clean frequently to avoid build-up of hard, stubborn stains. If you boil water in your stainless steel equipment, remember the single most likely cause of damage is chlorides in the water. Heating cleaners that contain chlorides has a similar effect.

6. RINSE, RINSE, RINSE

If chlorinated cleaners are used you must rinse, rinse, rinse and wipe dry immediately. The sooner you wipe off standing water, especially when it contains cleaning agents, the better. After wiping the equipment down, allow it to air dry for the oxygen helps maintain the stainless steel's passivity film.

7. Never Use Hydrochloric Acid (Muriatic Acid) on Stainless Steel

8. Regularly Restore/Passivate Stainless Steel

Maintenance (Cont'd)

WARNING

ALWAYS DISCONNECT THE ELECTRICAL POWER AT THE MAIN DISCONNECT WHEN SERVICING OR REPLACING ANY ELECTRICAL COMPONENT OF THIS REFRIGERATOR. THIS INCLUDES, BUT IS NOT LIMITED TO SUCH ITEMS AS FANS AND THERMOSTATS.

Fan Blade Replacement

The evaporator fan is located directly under the deck pan. Should the fan blade ever need servicing, ALWAYS REPLACE THE FAN BLADE WITH THE RAISED EMBOSSING SIDE OF THE BLADE INSTALLED TOWARD THE MOTOR.

LED Driver Replacement

The power supply for the LED fixtures is located under the case in a dedicated electrical box.

For access to the driver:

- Remove Close-off panels (See Close-off Removal for reference)
- Remove screws to grille to expose electrical conduit?
- Replace or service the ballast as required and replace the canopy in reverse order of removal.

13. Troubleshooting Guide

Problem	Possible Cause	Possible Solution
Case temperature is too warm.	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
	Discharge air temp is out of spec.	Check evaporator fan operation. Check electrical connections and input voltage.
		Fans are installed backwards. Check airflow direction.
		Fan blades are installed incorrectly. Make sure fan blades have correct pitch and are per specification.
		Check to see that fan plenum is installed correctly. It should not have any gaps.
		Check suction pressure and insure that it meets factory specifications.
	Case is in defrost.	Check defrost settings. See Technical Specifications section.
	Product load may be over its limits blocking airflow.	Redistribute product so it does not exceed load level. There is a sticker on the inside of the case indicating what the maximum load line is.
	Coil is freezing over.	Return air is blocked, make sure debris is not blocking the intake section.
Coil close-offs are not installed. Inspect coil to make sure these parts are on the case.		
Condensing coil or evaporator coil is clogged or dirty.	Clean coil.	
Case temperature is too cold.	The t-stat temp is set too low.	Check settings. See Technical Specifications section.
	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
Condensation on glass.	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
	Inadequate air circulation.	Check if air sweep fans are functioning, check electrical connections.
	There is not enough heat provided in the airflow.	Check if air sweep heater is functioning, check electrical connections.
	There are glass gaps on the side of the case.	See glass adjustment section.
	Glass is not completely shut.	Close glass correctly.

Troubleshooting Guide


Problem	Possible Cause	Possible Solution
Water has pooled under case.	Case drain is clogged.	Clear drain.
	PVC drains under case may have a leak.	Repair as needed.
	Case tub has unsealed opening.	Seal as needed.
	If the case is in a line-up, case to case joint is missing or unsealed.	Install case to case joint and seal as needed.
	Evaporator pan is overflowing (if applicable).	Check electrical connection to evaporator pan. Check float assembly, it should move freely up and down the support stem. Clear any debris.
Case is not draining properly.	Case is not level.	Level the case.
	Drain screen is plugged.	Clean drain screen and remove any debris.
	Drain or P-trap is clogged.	Clear any debris.
Frost or ice on evaporator coil.	Evaporator fans are not functioning.	Check electrical connections.
	Defrost clock is not functioning.	Case should be serviced by a qualified service technician.
	Coil is freezing over.	Return air is blocked, make sure debris is not blocking the intake section.
		Coil close-offs are not installed. Inspect coil to make sure these parts are on the case.
Large gap is visible on bottom of front glass or glass can't be opened because it is too low.	Glass Height adjusters need to be adjusted.	See Glass Adjustment section.
Large gaps are visible in between glass panels or glass rubs against end panel.	Glass/glass clamp assembly needs to be adjusted.	See Glass Adjustment section.
Front glass does not stay open and falls closed.	Glass shock/piston may need to be replaced.	Case should be serviced by a qualified service technician.
Lights do not come on.	LED Driver/light socket wiring.	Check electrical connections. See Electrical Section and check wiring diagram.
	LED Driver needs to be replaced.	Case should be serviced by a qualified service technician. See Electrical Section.
	Lamp socket needs to be replaced.	Case should be serviced by a qualified service technician.
	Lamp needs to be replaced.	See Maintenance Section.
	Light Switch needs to be replaced.	Case should be serviced by a qualified service technician.

14. Appendices

Appendix A. - Temperature Guidelines

The refrigerators should be operated according to the manufacturer's published engineering specifications for entering air temperatures for specific equipment applications. Table 1 shows the typical temperature of the air entering the food zone one hour before the start of defrost and one hour after defrost for various categories of refrigerators. Refer to Appendix C for Field Evaluation Guidelines.

Type of Refrigerator	Typical Entering Air Temperature
I. OPEN DISPLAY	
A. Non frozen:	
1) Meat	28°F
2) Dairy/Deli	32°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F
II. CLOSED DISPLAY	
A. Non frozen:	
1) Meat	34°F
2) Dairy/Deli	34°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F

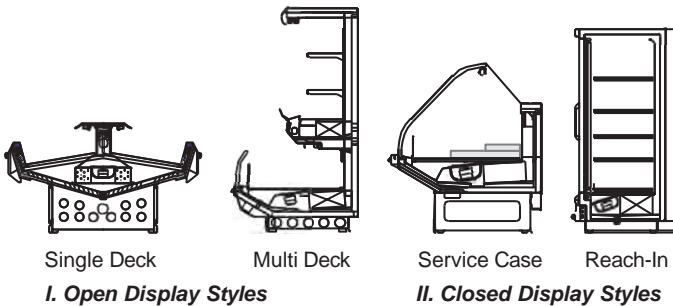

Appendix B. - Application Recommendations

1. Temperature performance is critical for controlling bacteria growth. Therefore, the following recommendations are included in the standard. They are based on confirmed field experience over many years.
2. The installer is responsible for following the installation instructions and recommendations provided by Hussmann for the installation of each individual type refrigerator.
3. Refrigeration piping should be sized according to

the equipment manufacturer's recommendations and installed in accordance with normal refrigeration practices. Refrigeration piping should be insulated according to Hussmann's recommendations.

3. A clogged waste outlet blocks refrigeration. The installer is responsible for the proper installation of the system which dispenses condensate waste through an air gap into the building indirect waste system.
4. The installer should perform a complete start-up evaluation prior to the loading of food into the refrigerator, which includes such items as:
 - a) Initial temperature performance, Coils should be properly fed with a refrigerant according to manufacturer's recommendations.
 - b) Observation of outside influences such as drafts, radiant heating from the ceiling and from lamps. Such influence should be properly corrected or compensated for.
 - c) At the same time, checks should be made of the store dry-bulb and wet-bulb temperatures to ascertain that they are within the limits prescribed by Hussmann.
 - d) Complete start-up procedures should include checking through a defrost to make certain of its adequate frequency and length without substantially exceeding the actual needs. This should include checking the electrical or refrigerant circuits to make sure that defrosts are correctly programmed for all the refrigerators connected to each refrigeration system.
 - e) Recording instruments should be used to check performance.

Appendix C. - Field Recommendations

Recommendations for field evaluating the performance of retail food refrigerators and hot cases

- 1.0 The most consistent indicator of display refrigerator performance is temperature of the air entering the product zone (see Appendix A). In practical use, the precise determination of return air temperature is extremely difficult. Readings of return air temperatures will be variable and results will be inconsistent. The product temperature alone is not an indicator of refrigerator performance.

Appendices (Cont'd)

NOTE: Public Health will use the temperature of the product in determining if the refrigerator will be allowed to display potentially hazardous food. For the purpose of this evaluation, product temperature above the FDA Food Code 1993 temperature for potentially hazardous food will be the first indication that an evaluation should be performed. It is expected that all refrigerators will keep food at the FDA Food Code 1993 temperature for potentially hazardous food.

1. The following recommendations are made for the purpose of arriving at easily taken and understood data which, coupled with other observations, may be used to determine whether a display refrigerator is working as intended:
 - a) **INSTRUMENT** - A stainless steel stem-type thermometer is recommended and it should have a dial a minimum of 1 inch internal diameter. A test thermometer scaled only in Celsius or dually scaled in Celsius and Fahrenheit shall be accurate to 1°C (1.8°F). Temperature measuring devices that are scaled only in Fahrenheit shall be accurate to 2°F. The thermometer should be checked for proper calibration. (It should read 32°F when the stem is immersed in an ice water bath).
 - b) **LOCATION** - The probe or sensing element of the thermometer should be located in the airstream where the air first enters the display or storage area, and not more than 1 inch away from the surface and in the center of the discharge opening.
 - c) **READING** - It should first be determined that the refrigerator is refrigerating and has operated at least one hour since the end of the last defrost period. The thermometer reading should be made only after it has been allowed to stabilize, i.e., maintain a constant reading.
 - d) **OTHER OBSERVATIONS** - Other observations should be made which may indicate operating problems, such as unsatisfactory product, feel/appearance.
 - e) **CONCLUSIONS** - In the absence of any apparent undesirable conditions, the refrigerator should be judged to be operating properly. If it is determined that such condition is undesirable, i.e., the product is above proper temperature, checks should be made for the following:
 1. Has the refrigerator been loaded with warm product?
 2. Is the product loaded beyond the "Safe Load Line" markers?
 3. Are the return air ducts blocked?
 4. Are the entering air ducts blocked?
 5. Is a dumped display causing turbulent air flow and mixing with room air?
 6. Are spotlights or other high intensity lighting directed onto the product?
 7. Are there unusual draft conditions (from heating/air-conditioning ducts, open doors, etc.)?
 8. Is there exposure to direct sunlight?
 9. Are display signs blocking or diverting airflow?
 10. Are the coils of the refrigerator iced up?
 11. Is the store ambient over 75°F, 55% RH as set forth in ASHRAE Standard 72 and ASHRAE Standard 117?
 12. Are the shelf positions, number, and size other than recommended by Hussmann?
 13. Is there an improper application or control system?
 14. Is the evaporator fan motor/blade inoperative?
 15. Is the defrost time excessive?
 16. Is the defrost termination, thermostat (if used) set too high?
 17. Are the refrigerant controls incorrectly adjusted?
 18. Is the air entering the condenser above design conditions? Are the condenser fins clear of dirt, dust, etc.?
 19. Is there a shortage of refrigerant?
 20. Has the equipment been modified to use replacements for CFC-12, CFC-502 or other refrigerant? If so, have the modifications been made in accordance with the recommendations of the equipment manufacturer? Is the refrigerator charged with the proper refrigerant and lubricant? Does the system use the recommended compressor?

Appendix D. - Recommendations to User

- 1.0 Hussmann Corporation provides instructions and recommendations for proper periodic cleaning. The user will be responsible for such cleaning, including the cleaning of low temperature equipment within the compartment and the cooling coil area(s). Cleaning practices, particularly with respect to proper refrigerator unloading and warm-up, must be in accordance with applicable recommendations.

Appendices (Cont'd)

- 1.1 Cleaning of non frozen food equipment should include a weekly cleaning of the food compartment as a minimum to prevent bacteria growth from accumulating. Actual use and products may dictate more frequent cleaning. Circumstances of use and equipment design must also dictate the frequency of cleaning the display areas. Weekly washing down of the storage compartment is also recommended, especially for equipment subject to drippage of milk or other liquids, or the collection of vegetable, meat, crumbs, etc. or other debris or litter. Daily cleaning of the external areas surrounding the storage or display compartments with detergent and water will keep the equipment presentable and prevent grime buildup.
2. Load levels as defined by the manufacturer must be observed.
3. The best preservation is achieved by following these rules:
 - a) Buy quality products.
 - b) Receive perishables from transit equipment at the ideal temperature for the particular product.
 - c) Expedite perishables to the store's storage equipment to avoid unnecessary warm-up and prolonged temperature recovery. Food store refrigerators are not food chillers nor can they reclaim quality lost through previous mishandling.
 - d) Care must be taken when cross merchandising products to ensure that potentially hazardous vegetable products are not placed in non refrigerated areas.
 - e) Display and storage equipment doors should be kept closed during periods of inactivity.
 - f) Minimize the transfer time of perishables from storage to display.
 - g) Keep meat under refrigeration in meat cutting and processing area except for the few moments it is being handled in processing. When a cut or tray of meat is not to be worked on immediately, the procedure should call for returning it to refrigeration.
 - h) Keep tools clean and sanitized. Since mechanical equipment is used for fresh meat processing, all such equipment should be cleaned at least daily and each time a different kind of meat product comes in contact with the tool or equipment.
 - i) Make sure that all refrigeration equipment is installed and adjusted in strict accordance with the manufacturer's recommendations.
 - j) See that all storage and refrigeration equipment is kept in proper working order by routine maintenance.

15. Controller Parameters

Q2-SS					PGM0006A01	
					STANDARD CASE REV F 06/4/18	
Parameter	Code	Min	Max	Default	Actual (°C)	Actual (°F)
Temperature (set point)						
Deli (Type I)	---	-50.0°C	50.0°C	2.0°C	-4.4	24
Meat (Type I)	---	-50.0°C	50.0°C	2.0°C	-6.7	20
Thermostat						
Differential	r01	0.1 K	20.0K	2.0 K	4.4	8
Max. limitation of setpoint setting	r02	-49.0°C	50°C	50.0°C	-1.1	30
Min. limitation of setpoint setting	r03	-50.0°C	49.0°C	-50.0°C	-6.7	20
Adjustment of temperature indication	r04	-20.0 K	20.0 K	0.0 K		
Temperature unit (°C=0/°F=1)	r05	0	1	0	1	
Correction of the signal from S4	r09	-10.0 K	+10.0 K	0.0 K		
Correction of the signal from S3	r10	-10.0 K	+10.0 K	0.0 K		
Manual service, stop regulation, start regulation (-1, 0, 1)	r12	-1	1	0	1	
Displacement of reference during night operation	r13	-10.0 K	10.0 K	0.0 K		
Definition and weighting, if applicable, of thermostat sensors - S4% (100%=S4, 0%=S3)	r15	0%	100%	100%		
The heating function is started a number of degrees below the thermostats cutout temperature	r36	-15.0 K	-3.0 K	-15.0 K		
Activation of reference displacement r40	r39	OFF	ON	OFF		
Value of reference displacement (activate via r39 or DI)	r40	-50.0 K	50.0 K	0.0 K		
Alarm						
Delay for temperature alarm	A03	0 min	240 min	30 min		
Delay for door alarm	A04	0 min	240 min	60 min		
Delay for temperature alarm after defrost	A12	0 min	240 min	90 min	30	
High alarm limit	A13	-50.0°C	50.0°C	8.0°C	5.0	41
Low alarm limit	A14	-50.0°C	50.0°C	-30.0°C	-9.4	15
Alarm delay DI1	A27	0 min	240 min	30 min		
Alarm delay DI2	A28	0 min	240 min	30 min		
Signal for alarm thermostat. S4% (100%=S4, 0%=S3)	A36	0%	100%	100%		
Compressor						
Min. ON-time	c01	0 min	30 min	0 min	1	
Min. OFF-time	c02	0 min	30 min	0 min	2	
Time delay for cutin of comp.2	c05	0 sec	999 sec	0 sec		
Compressor relay 1 must cutin and out inversely (NC-function)	c30	0	1	0		
		OFF	ON	OFF		
Defrost						
Defrost method (none/EL/GAS/BRINE)	d01	no	bri	EL		
Defrost stop temperature	d02	0.0°C	25.0°C	6.0°C	8.9	48
Interval between defrost starts	d03	0 hours	240 hours	8 hours	6	
Max. defrost duration	d04	0 min	180 min	45 min	50	
Displacement of time on cutin of defrost at start-up	d05	0 min	240 min	0 min		
Drip off time	d06	0 min	60 min	0 min		
Delay for fan start after defrost	d07	0 min	60 min	0 min		
Fan start temperature	d08	-15.0°C	0.0°C	-5.0°C		
Fan cutin during defrost	d09	0	2	1		
0: Stopped 1: Running 2: Running during pump down and defrost						
Defrost Sensor (0=time, 1=S5, 2=S4)	d10	0	2	0	0	
Pump down delay	d16	0 min	60 min	0 min		
Drain delay	d17	0 min	60 min	0 min		
Max. aggregate refrigeration time between two defrosts	d18	0 hours	48 hours	0 hours		
Defrost on demand - S5 temperature's permitted variation during frost build-up. On central plant choose 20 K (=off)	d19	0.0 K	20.0 k	20.0 K		
Delay of hot gas defrost	d23	0 min	60 min	0 min		
Fan						
Fan stop at cutout compressor	F01	no	yes	no		
Delay of fan stop	F02	0 min	30 min	0 min		
Fan stop temperature (S5)	F04	-50.0°C	50.0°C	50.0°C		

Controller Parameters (Cont'd)

HACCP					
Actual temperature measurement for the HACCP	h01				
Last registered peak temperature	h10				
Selection of function and sensor for the HACCP HACCP function. 1 = S4 used (maybe also S3). 2 = S5	h11	0	2	0	
Alarm limit for the HACCP function	h12	-50.0°C	50.0°C	8.0°C	
Time delay for the HACCP alarm	h13	0 min.	240 min.	30 min.	
Select signal for the HACCP function. S4% (100% = S4,	h14	0%	100%	100%	
Real time clock					
Six start times for defrost. Setting of hours. 0=OFF	t01-t06	0 hours	23 hours	0 hours	
Six start times for defrost. Setting of minutes. 0=OFF	t11-t16	0 min	59 min	0 min	
Clock - Setting of hours	t07	0 hours	23 hours	0 hours	
Clock - Setting of minute	t08	0 min	59 min	0 min	
Clock - Setting of date	t45	1	31	1	
Clock - Setting of month	t46	1	12	1	
Clock - Setting of year	t47	0	99	0	
Miscellaneous					
Delay of output signals after start-up	o01	0 s	600 s	5 s	
Input signal on DI1. Function:	o02	1	11	0	
Network address	o03	0	240	0	
On/Off switch (Service Pin message)	o04	OFF	ON	OFF	
Access code 1 (all settings)	o05	0	100	0	
Used sensor type (Pt /PTC/NTC)	o06	Pt	ntc	Pt	
Display step = 0.5 (normal 0.1 at Pt sensor)	o15	no	yes	no	
Max hold time after coordinated defrost	o16	0 min	60 min	20	
Select signal for display view. S4% (100%=S4, 0%=S3)	o17	0%	100%	100%	
Input signal on DI2. Function:	o37	0	12	0	
Configuration of light function (relay 4)	o38	1	3	1	
Activation of light relay (only if o38=2)	o39	OFF	ON	OFF	
Rail heat On time during day operations	o41	0%	100%	100	
Rail heat On time during night operations	o42	0%	100%	100	
Rail heat period time (On time + Off time)	o43	6 min	60 min	10 min	
Case cleaning. 0=no case cleaning. 1=Fans only. 2=All	o46	0	2	0	
Selection of EL diagram. See overview page 6	o61	1	10	1	
Download a set of predetermined settings. See	o62	0	6	0	
Access code 2 (partly access)	o64	0	100	0	
Save the controllers present settings to the	o65	0	25	0	
Load a set of settings from the programming key	o66	0	25	0	
Replace the controllers factory settings with the	o67	OFF	On	OFF	
Service					
Status codes are shown on page 17	S0-S33				
Temperature measured with S5 sensor	u09				
Status on DI1 input. on/1=closed	u10				
Temperature measured with S3 sensor	u12				
Status on night operation (on or off) 1=closed	u13				
Temperature measured with S4 sensor	u16				
Thermostat temperature	u17				
Read the present regulation reference	u28				
Status on DI2 output. on/1=closed	u37				
Temperature shown on display	u56				
Measured temperature for alarm thermostat	u57				
Status on relay for cooling	u58				
Status on relay for fan	u59				
Status on relay for defrost	u60				
Status on relay for railheat	u61				
Status on relay for alarm	u62				
Status on relay for light	u63				
Status on relay for valve in suction line	u64				
Status on relay for compressor 2	u67				


Controller Parameters (Cont'd)





Q-SS-2 (Q1, Q2, Q3)					PGM0011A01	
					STANDARD CASE REV C 6/5/18	
Parameter	Code	Min	Max	Default	Actual (°C)	Actual (°F)
Temperature (set point)						
Produce (Type I)	---	-50.0°C	50.0°C	2.0°C	-7.8	18
Thermostat						
Differential	r01	0.1 K	20.0K	2.0 K	4.4	8
Max. limitation of setpoint setting	r02	-49.0°C	50°C	50.0°C	2.2	36
Min. limitation of setpoint setting	r03	-50.0°C	49.0°C	-50.0°C	-7.8	18
Adjustment of temperature indication	r04	-20.0 K	20.0 K	0.0 K	0.0 K	
Temperature unit (°C=0/°F=1)	r05	0	1	0	1	
Correction of the signal from S4	r09	-10.0 K	+10.0 K	0.0 K	0.0 K	
Correction of the signal from S3	r10	-10.0 K	+10.0 K	0.0 K	0.0 K	
Manual service, stop regulation, start regulation (-1, 0, 1)	r12	-1	1	0	1	
Displacement of reference during night operation	r13	-10.0 K	10.0 K	0.0 K	0.0 K	
Definition and weighting, if applicable, of thermostat sensors - S4% (100%=S4, 0%=S3)	r15	0%	100%	100%	100%	
The heating function is started a number of degrees below the thermostats cutout temperature	r36	-15.0 K	-3.0 K	-15.0 K	-15.0 K	
Activation of reference displacement r40	r39	OFF	ON	OFF	OFF	
Value of reference displacement (activate via r39 or DI)	r40	-50.0 K	50.0 K	0.0 K	0.0 K	
Alarm						
Delay for temperature alarm	A03	0 min	240 min	30 min	30 min	
Delay for door alarm	A04	0 min	240 min	60 min	60 min	
Delay for temperature alarm after defrost	A12	0 min	240 min	90 min	60	
High alarm limit	A13	-50.0°C	50.0°C	8.0°C	5.0	41
Low alarm limit	A14	-50.0°C	50.0°C	-30.0°C	-9.4	15
Alarm delay DI1	A27	0 min	240 min	30 min	30 min	
Alarm delay DI2	A28	0 min	240 min	30 min	30 min	
Signal for alarm thermostat. S4% (100%=S4, 0%=S3)	A36	0%	100%	100%	100%	
Compressor						
Min. ON-time	c01	0 min	30 min	0 min	1	
Min. OFF-time	c02	0 min	30 min	0 min	2	
Time delay for cutin of comp.2	c05	0 sec	999 sec	0 sec	0 sec	
Compressor relay 1 must cutin and out inversely (NC-function)	c30	0	1	0	0	
		OFF	ON	OFF	OFF	
Defrost						
Defrost method (none/EL/GAS/BRINE)	d01	no	bri	EL	EL	
Defrost stop temperature	d02	0.0°C	25.0°C	6.0°C	8.9	48
Interval between defrost starts	d03	0 hours	240 hours	8 hours	6	
Max. defrost duration	d04	0 min	180 min	45 min	50	
Displacement of time on cutin of defrost at start-up	d05	0 min	240 min	0 min	0 min	
Drip off time	d06	0 min	60 min	0 min	0 min	
Delay for fan start after defrost	d07	0 min	60 min	0 min	0 min	
Fan start temperature	d08	-15.0°C	0.0°C	-5.0°C	-5.0°C	
Fan cutin during defrost	d09	0	2	1	1	
0: Stopped 1: Running 2: Running during pump down and defrost						
Defrost Sensor (0=time, 1=S5, 2=S4)	d10	0	2	0	0	
Pump down delay	d16	0 min	60 min	0 min	0 min	
Drain delay	d17	0 min	60 min	0 min	0 min	
Max. aggregate refrigeration time between two defrosts	d18	0 hours	48 hours	0 hours		
Defrost on demand - S5 temperature's permitted variation during frost build-up. On central plant choose 20 K (=off)	d19	0.0 K	20.0 k	20.0 K		
Delay of hot gas defrost	d23	0 min	60 min	0 min	0 min	
Fan						
Fan stop at cutout compressor	F01	no	yes	no	no	
Delay of fan stop	F02	0 min	30 min	0 min	0 min	
Fan stop temperature (S5)	F04	-50.0°C	50.0°C	50.0°C	50.0°C	
HACCP						
Actual temperature measurement for the HACCP	h01					
Last registered peak temperature	h10					
Selection of function and sensor for the HACCP	h11	0	2	0	0	
HACCP function. 1 = S4 used (maybe also S3). 2 = S5						

Controller Parameters (Cont'd)

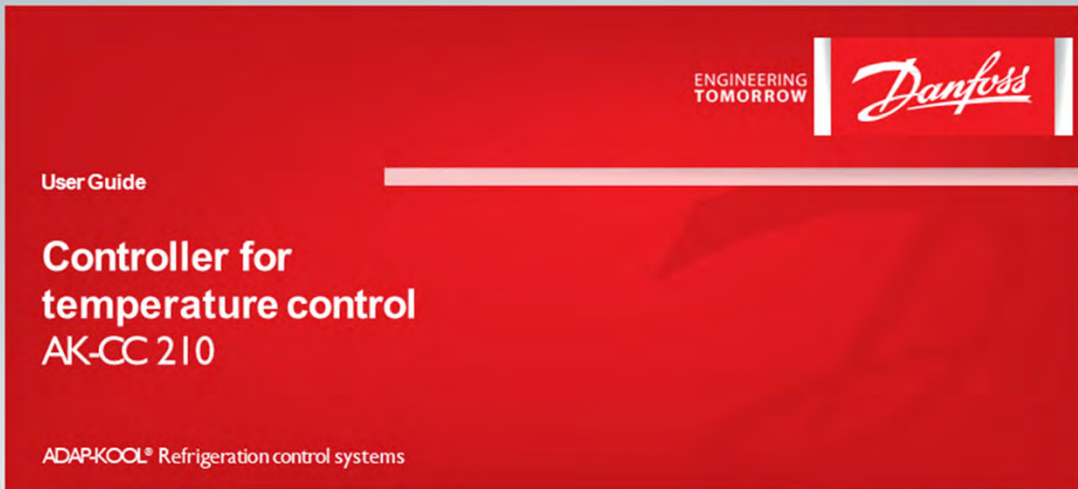Alarm limit for the HACCP function	h12	-50.0°C	50.0°C	8.0°C	8.0°C
Time delay for the HACCP alarm	h13	0 min.	240 min.	30 min.	30 min.
Select signal for the HACCP function. S4% (100% = S4,	h14	0%	100%	100%	100%
Real time clock					
Six start times for defrost. Setting of hours. 0=OFF	t01-t06	0 hours	23 hours	0 hours	0 hours
Six start times for defrost. Setting of minutes. 0=OFF	t11-t16	0 min	59 min	0 min	0 min
Clock - Setting of hours	t07	0 hours	23 hours	0 hours	0 hours
Clock - Setting of minute	t08	0 min	59 min	0 min	0 min
Clock - Setting of date	t45	1	31	1	1
Clock - Setting of month	t46	1	12	1	1
Clock - Setting of year	t47	0	99	0	0
Miscellaneous					
Delay of output signals after start-up	o01	0 s	600 s	5 s	5 s
Input signal on DI1. Function:	o02	1	11	0	0
Network address	o03	0	240	0	0
On/Off switch (Service Pin message)	o04	OFF	ON	OFF	OFF
Access code 1 (all settings)	o05	0	100	0	0
Used sensor type (Pt /PTC/NTC)	o06	Pt	ntc	Pt	Pt
Display step = 0.5 (normal 0.1 at Pt sensor)	o15	no	yes	no	no
Max hold time after coordinated defrost	o16	0 min	60 min	20	20
Select signal for display view. S4% (100%=S4, 0%=S3)	o17	0%	100%	100%	100%
Input signal on DI2. Function:	o37	0	12	0	0
Configuration of light function (relay 4)	o38	1	3	1	1
Activation of light relay (only if o38=2)	o39	OFF	ON	OFF	OFF
Rail heat On time during day operations	o41	0%	100%	100	100
Rail heat On time during night operations	o42	0%	100%	100	100
Rail heat period time (On time + Off time)	o43	6 min	60 min	10 min	10 min
Case cleaning. 0=no case cleaning. 1=Fans only. 2=All	o46	0	2	0	0
Selection of EL diagram. See overview page 6	o61	1	10	1	1
Download a set of predetermined settings. See	o62	0	6	0	0
Access code 2 (partly access)	o64	0	100	0	0
Save the controllers present settings to the	o65	0	25	0	0
Load a set of settings from the programming key	o66	0	25	0	0
Replace the controllers factory settings with the	o67	OFF	On	OFF	OFF
Service					
Status codes are shown on page 17	S0-S33				
Temperature measured with S5 sensor	u09				
Status on DI1 input. on/1=closed	u10				
Temperature measured with S3 sensor	u12				
Status on night operation (on or off) 1=closed	u13				
Temperature measured with S4 sensor	u16				
Thermostat temperature	u17				
Read the present regulation reference	u28				
Status on DI2 output. on/1=closed	u37				
Temperature shown on display	u56				
Measured temperature for alarm thermostat	u57				
Status on relay for cooling	u58				
Status on relay for fan	u59				
Status on relay for defrost	u60				
Status on relay for railheat	u61				
Status on relay for alarm	u62				
Status on relay for light	u63				
Status on relay for valve in suction line	u64				
Status on relay for compressor 2	u67				

16. Danfoss Controller Operations







- ①  Open Camera
- ②  iPhone User
Hold the camera up to the QR code
-  Android User
Open QR Code Reader app if necessary.
Hold the camera up to the QR code
- ③  Tap the notification to be taken to the destination of the QR code

17. Dixell Controller Operations

026-1210 Rev 3 03-FEB-2015

XR75CX Digital Controller for Medium-Low Temperature Refrigeration Applications Installation and Operation Manual



- ①  Open Camera
- ②  iPhone User
Hold the camera up to the QR code
-  Android User
Open QR Code Reader app if necessary.
Hold the camera up to the QR code
- ③  Tap the notification to be taken to the destination of the QR code



This warning does not mean that Hussmann products will cause cancer or reproductive harm, or is in violation of any product-safety standards or requirements. As clarified by the California State government, Proposition 65 can be considered more of a ‘right to know’ law than a pure product safety law. When used as designed, Hussmann believes that our products are not harmful. We provide the Proposition 65 warning to stay in compliance with California State law. It is your responsibility to provide accurate Proposition 65 warning labels to your customers when necessary. For more information on Proposition 65, please visit the California State government website.

Service Record

Last service date: By:

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

HUSSmann®/Chino

Additional copies of this publication may be obtained by contacting:

Hussmann® Chino
13770 Ramona Avenue • Chino, California 91710
(909) 628-8942 FAX
(909) 590-4910
(800) 395-9229

The *MODEL NAME* and *SERIAL NUMBER* is required in order to provide you with the correct parts and information for your particular unit.

They can be found on a small metal plate on the unit. Please note them below for future reference.

MODEL:

SERIAL NUMBER: