


REV	DATE/ECO	DESCRIPTION OF CHANGE	DR
A	7/23/2008	REVISED GRIDDLE AND CLAMSHELL WIRING NOTES	JMM

- ① GRIDDLE ELEMENTS
- ② GRIDDLE PILOT LAMP
- ③ GRIDDLE THERMOSTAT
- ④ JUMPER
- ⑤ TERMINAL BLOCK
- ⑥ SWITCH
- ⑦ TERMINAL BLOCK - 4 POLE
- ⑧ OVERTEMP STAT #1
- ⑨ HOOD TILT SWITCH
- ⑩ HOOD ELEMENTS
- ⑪ CONTACTOR
- ⑫ FUSE
- ⑬ TIMER PLUG
- ⑭ HOOD PILOT LAMP

GRIDDLE ELEMENT HOOKUP	
208-220 V	240V
INSTALL JUMPER (ITEM 4)	REMOVE JUMPER (ITEM 4)

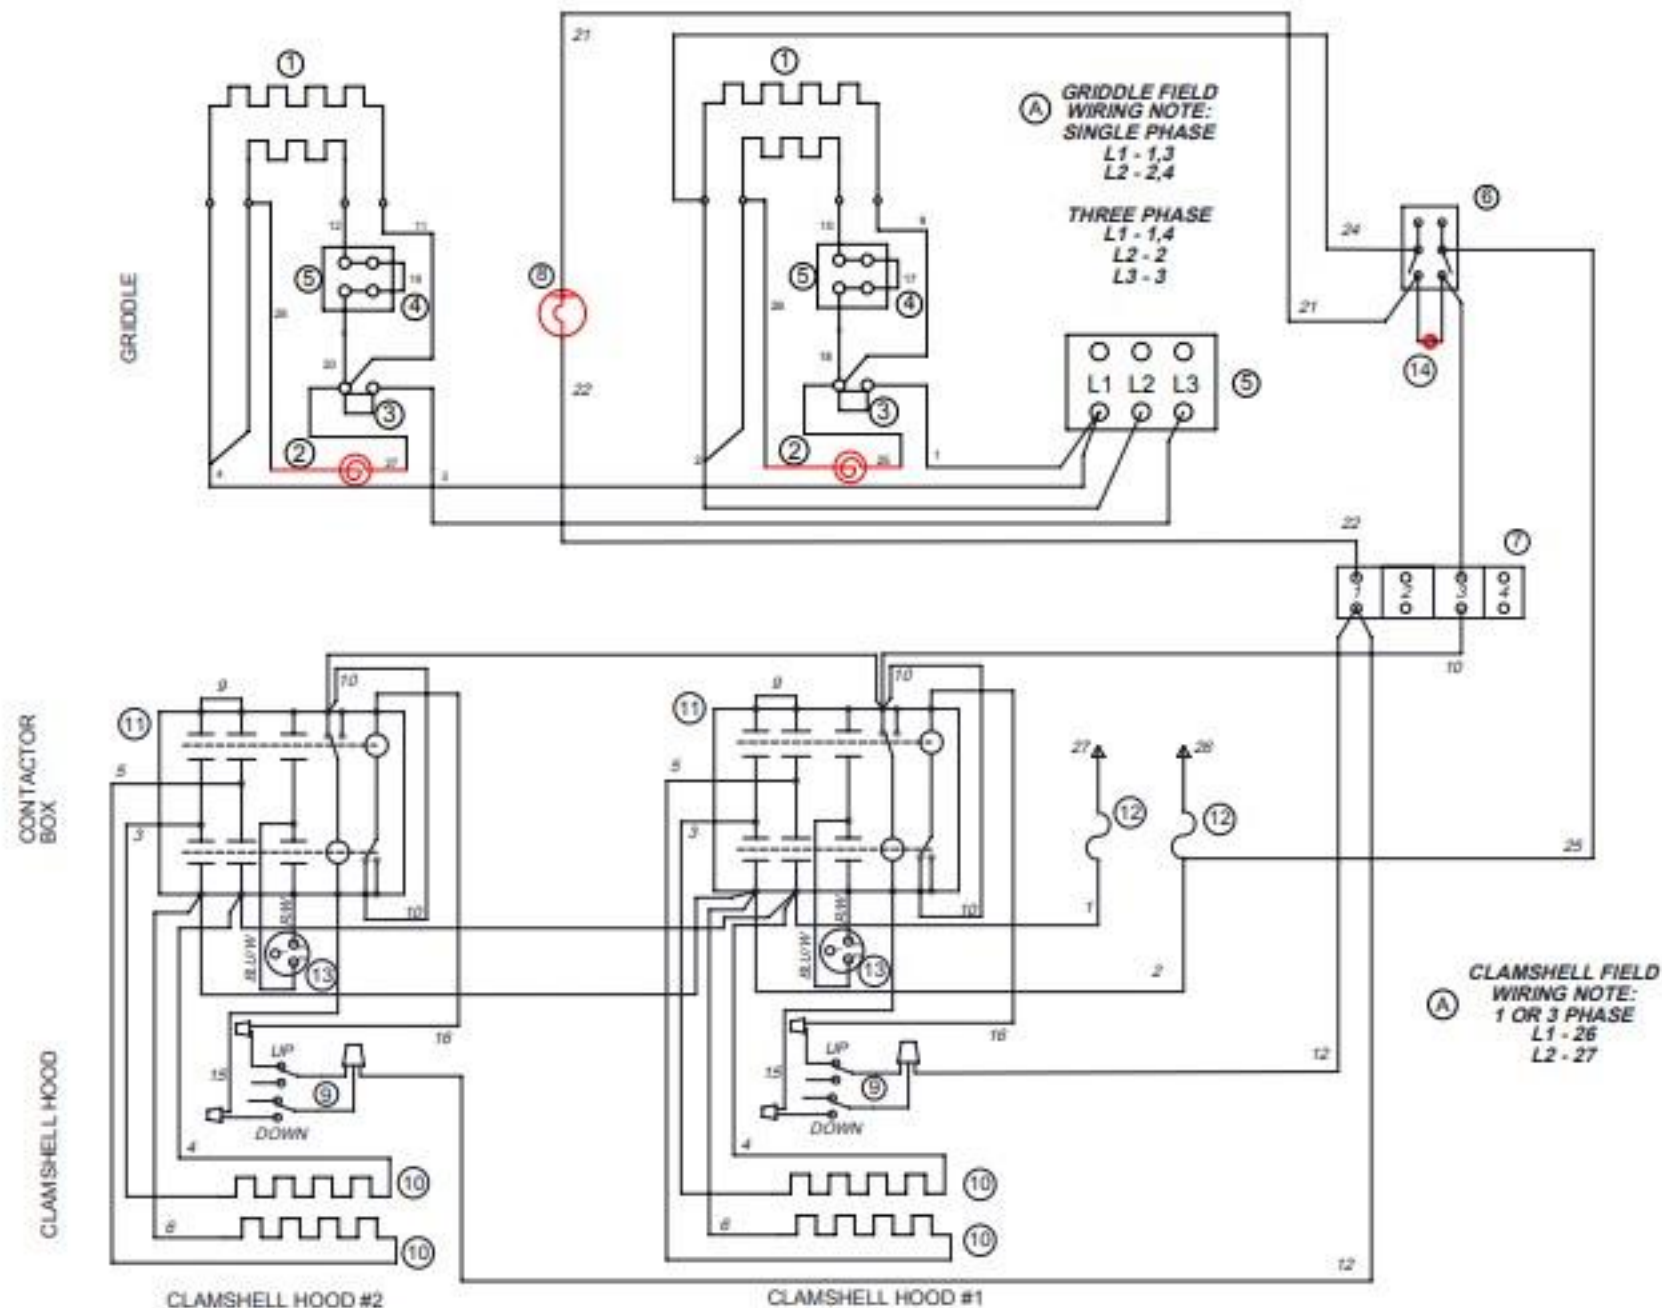

- ① GRIDDLE ELEMENTS
- ② GRIDDLE PILOT LAMP
- ③ GRIDDLE THERMOSTAT
- ④ JUMPER
- ⑤ TERMINAL BLOCK
- ⑥ SWITCH
- ⑦ TERMINAL BLOCK - 4 POLE
- ⑧ OVERTEMP STAT #1
- ⑨ HOOD TILT SWITCH
- ⑩ HOOD ELEMENTS
- ⑪ CONTACTOR
- ⑫ FUSE
- ⑬ TIMER PLUG
- ⑭ HOOD PILOT LAMP
- ⑮ OVERTEMP STAT #2

GRIDDLE ELEMENT HOOKUP	
208-220 V	240V
INSTALL JUMPER (ITEM 4)	REMOVE JUMPER (ITEM 4)

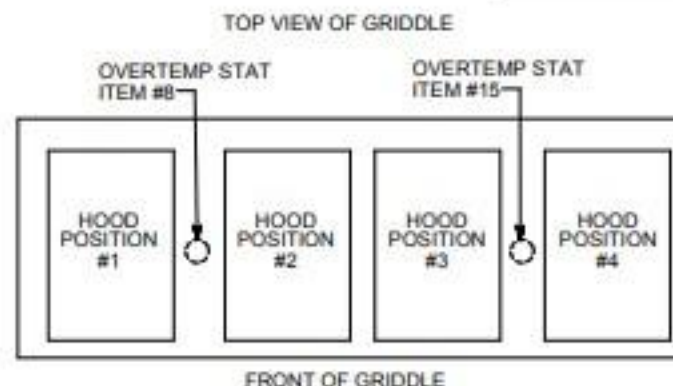


TABLE 1	
HOOD POSITION #	USE OVERTEMP STAT ITEM #
1	8
2	8
3	15
4	15
1,2	8
3,4	15
ALL OTHER COMBINATIONS	8 & 15

- NOTES:
1. FUSE BLOCK PAIR REQUIRED FOR EVERY 1 OR 2 CLAMSHELL COMBINATION.
 2. OVERTEMP STATS ARE LOCATED ON THE UNDERSIDE OF THE GRIDDLE PLATE.
 3. SEE TABLE 1 FOR ITEM 8 & 15 USAGE.
 4. ---DASHED COMPONENTS ARE REQUIRED ONLY WHEN 3 OR 4 HOODS ARE USED.

STAR MANUFACTURING INTERNATIONAL INC.
10 SUMMIT DRIVE
ST. LOUIS, MO. 63143 USA

Lang

THIS DRAWING CONTAINS INFORMATION CONFIDENTIAL TO STAR MFG. INT'L. INC. NO REPRODUCTION OR DISCLOSURE OF ITS CONTENTS IS PERMITTED.

MATERIAL		MODEL NO.	PART NO.
FINISH		TITLE	2M-61114-W53
DW: DJS CK: DATE: 10/29/2015		WID 4' ACCUTEMP ELECT GRID W/ CSE12 HOODS - 208/240V	
TOLERANCE: UNLESS NOTED OTHERWISE	REVISIONS	REV.	DATE/ECO
1/16" .125"	A	10/30/15	ECN 14950
DESCRIPTION OF CHANGE		ADDED L1 AND L2 TO WIRE POSITIONS OF HOOD CONTACTOR	
DR		PMR	

