# T&S BRASS AND BRONZE WORKS, INC.

**2 Saddleback Cove / P.O. Box 1088**
**Travelers Rest, SC 29690**

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com


Model No.

**BL-6000-02**

Item No.

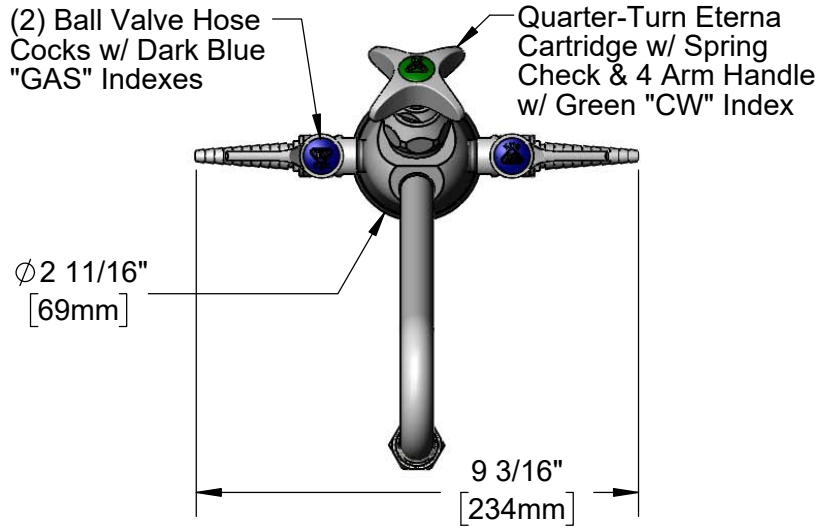


This Space for Architect/Engineer Approval

Job Name_____Date_____

Model Specified_____ Quantity_____

Customer/Wholesaler_____

Contractor_____

Architect/Engineer_____

**ADA Compliant**

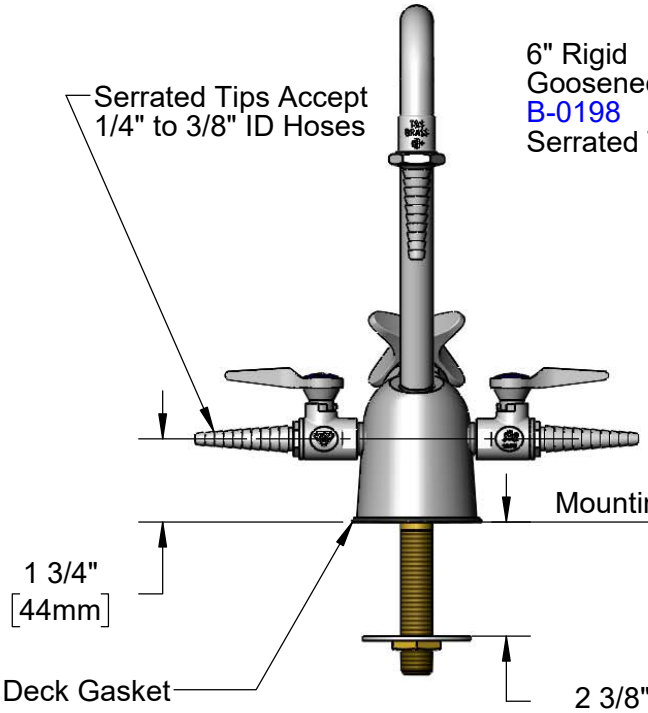


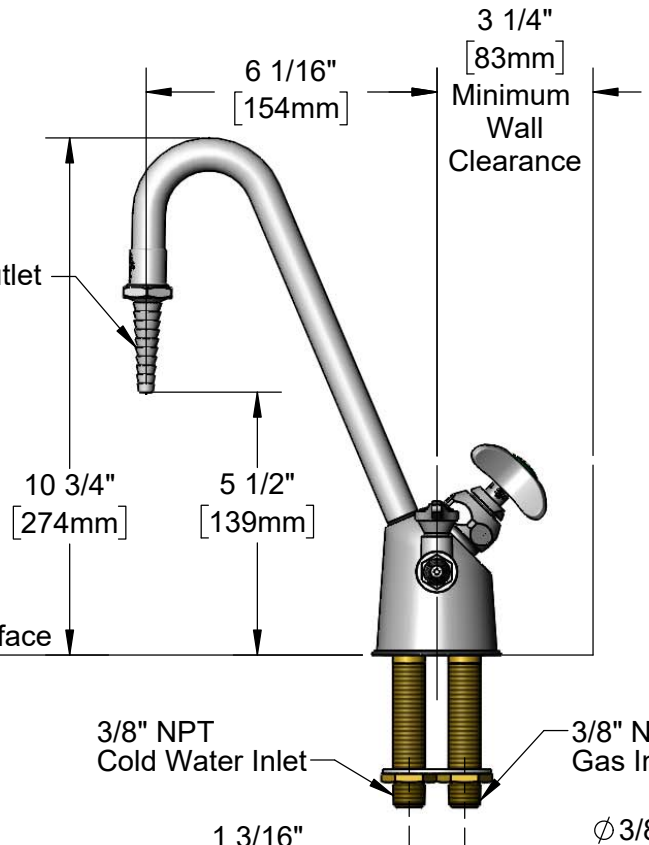


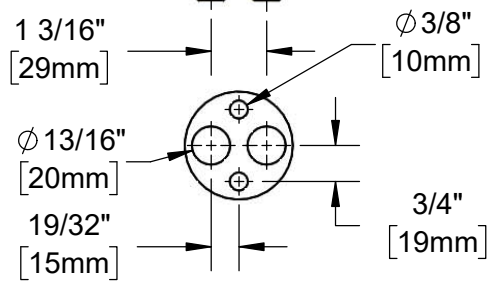


Mounting Washer / Rough-In Detail

Notes:

1. Natural Gas Pressure: 0.5 PSIG Max. (For Natural Gas above 0.5 PSIG or Oxygen and Specialty Gases, use BL-4010-01 Gas Cock.)
2. Temperature Range: 32˚F - 125˚F

Product Specifications:

Combination Gas & Water Fixture w/ (2) Ball Valve Gas Cocks, Quarter-Turn Eterna Cartridge with Spring Check and 4-Arm Handle, 6" Rigid Gooseneck, Serrated Tip & 3/8" NPT Male Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI Z21.15a / CSA 9.1a (Gas Valves)
ANSI A117.1 (ADA)

| Drawn: | Checked: | Approved: | Date: | Scale: | Sheet: |
|---|---|---|---|---|---|
| JDR | JRM | JHB | 09/02/21 | 1:4 | 1 of 2 |

# T&S BRASS AND BRONZE WORKS, INC.

**2 Saddleback Cove / P.O. Box 1088**
**Travelers Rest, SC 29690**

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com


Model No.

**BL-6000-02**

Item No.

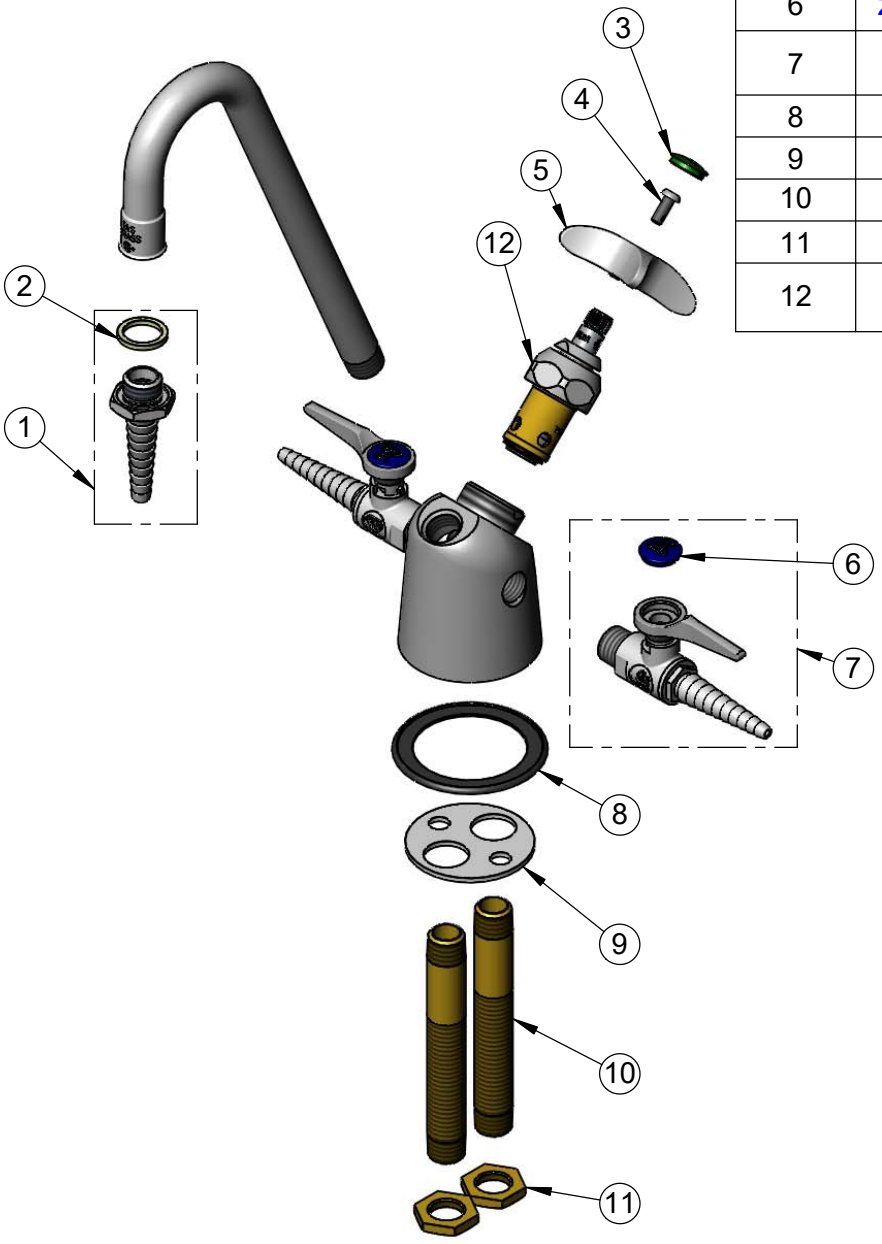


| ITEM NO. | SALES NO. | DESCRIPTION |
|---|---|---|
| 1 | B-0198 | Serrated Tip w/ Washer |
| 2 | 001051-45 | Washer |
| 3 | 001191-45NS | Green "CW" Lab Button Index |
| 4 | 000925-45 | Lab Handle Screw |
| 5 | 002521-45NS | 4-Arm Handle (New Style) |
| 6 | 209L-GAS-NS | Dark Blue "GAS" Lab Button Index |
| 7 | BL-4000-01 | Ball Valve Hose Cock w/ GAS, AIR & VAC Indexes |
| 8 | 001160-45 | Gasket, BL-6000 |
| 9 | 001004-45 | Turret Brass Washer, BL-6000 |
| 10 | 000381-20 | 3/8" NPT Brass Supply Nipple |
| 11 | 000969-45 | 3/8" NPSL Brass Lock Nut |
| 12 | 012443-40NS | Quarter-Turn Eterna Cartidge, w/ Spring Check, RTC |

Product Specifications:

Combination Gas & Water Fixture w/ (2) Ball Valve Gas Cocks, Quarter-Turn Eterna Cartridge with Spring Check and 4-Arm Handle, 6" Rigid Gooseneck, Serrated Tip & 3/8" NPT Male Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)
ANSI Z21.15a / CSA 9.1a (Gas Valves)
ANSI A117.1 (ADA)

| Drawn: | Checked: | Approved: | Date: | Scale: | Sheet: |
|---|---|---|---|---|---|
| JDR | JRM | JHB | 09/02/21 | NTS | 2 of 2 |